

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P642954

Luminaire Tested: ML5615LSNFL259FS1E - 693BB - 900LM - 4000K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P642954
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-18)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5615LSNFL259FS1E - 693BB - 900LM - 4000K
Description: ML56 RR, 25D TIR OPTIC, 6" BLACK BAFFLE TRIM
Light Source: (1) STANDARD SELECTABLE LUMEN LED 90CRI / 4000K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1135.1 lumens
Efficiency: N/A
Efficacy: 108.1 lumens/watt
Spacing Criteria (0/90/45): 0.43 / 0.43 / 0.43
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct

Input Watts (W): 10.5
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P642954
CATALOG NUMBER: ML5615LSNFL259FS1E - 693BB - 900LM - 4000K

Luminous Intensity Polar Plot

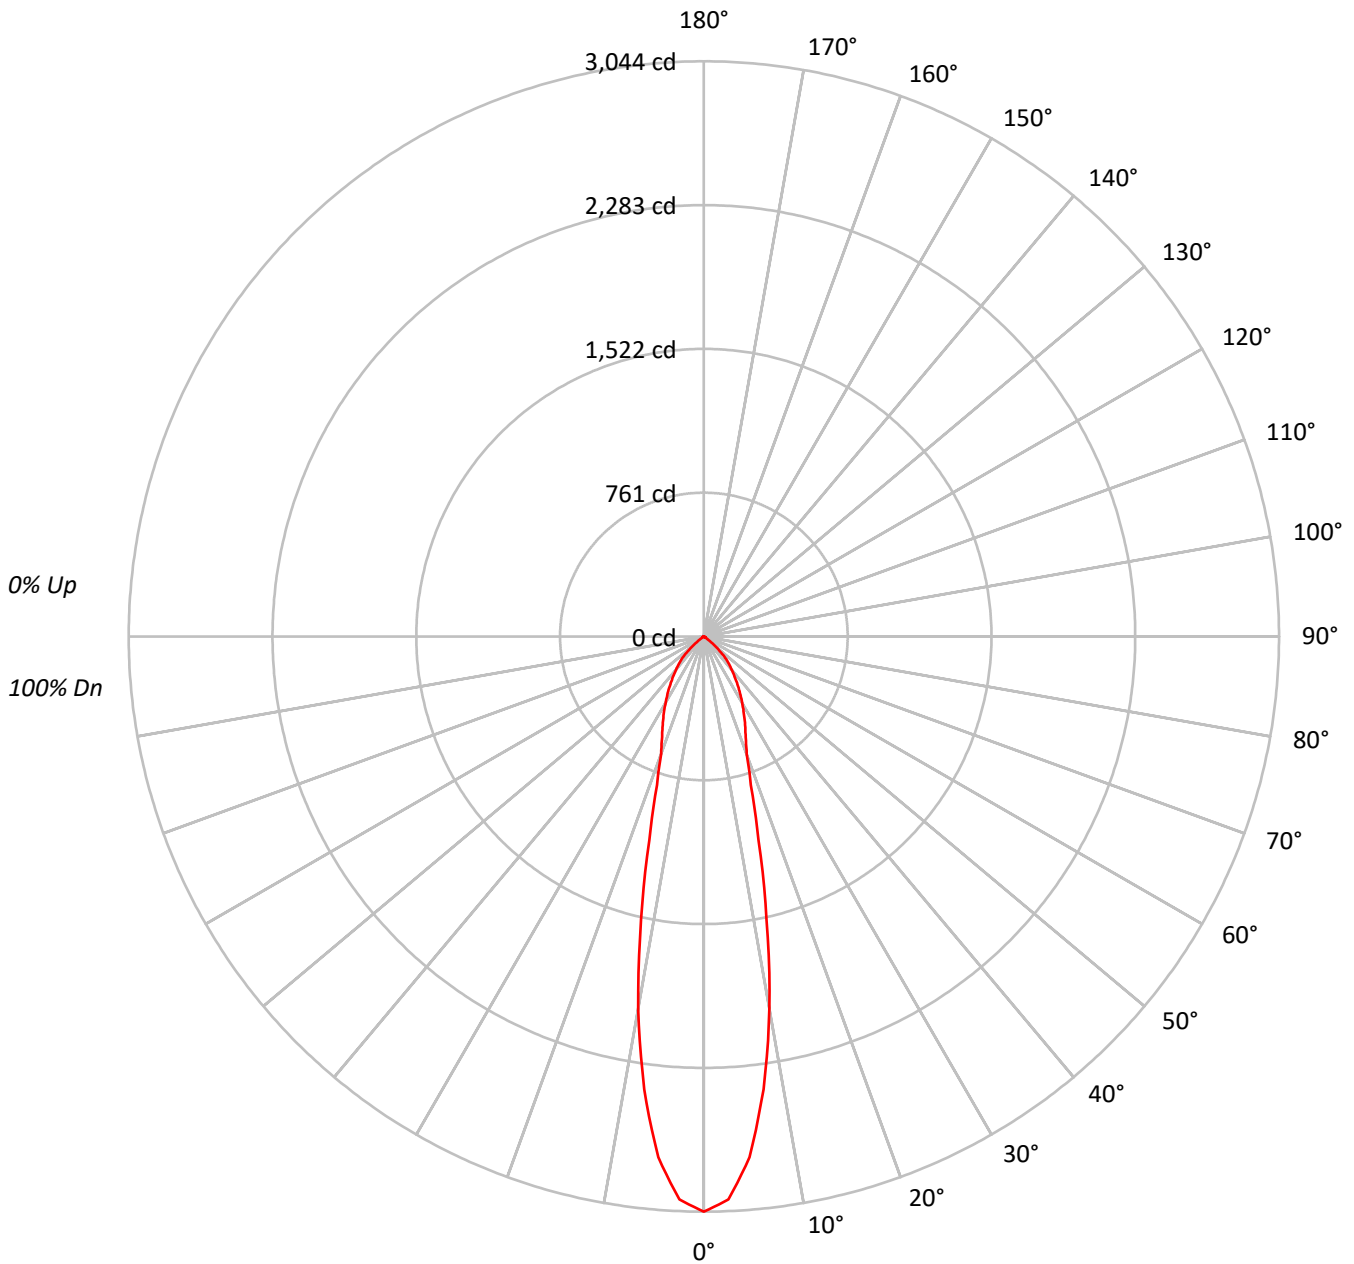



TEST NUMBER: P642954

CATALOG NUMBER: ML5615LSNFL259FS1E - 693BB - 900LM - 4000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	114	111	109	107	111	109	107	105	105	103	102	101	100	99	98	97	96	94																			
2	108	104	100	97	106	102	99	96	99	96	94	96	94	92	93	91	90	88																			
3	103	97	92	89	101	96	92	88	93	90	87	91	88	85	89	86	84	82																			
4	98	91	86	82	97	90	85	82	88	84	81	86	83	80	84	81	79	77																			
5	94	86	81	76	92	85	80	76	83	79	75	82	78	75	80	77	74	73																			
6	90	81	76	72	88	80	75	71	79	74	71	78	74	70	76	73	70	69																			
7	86	77	71	67	84	76	71	67	75	70	67	74	70	67	73	69	66	65																			
8	82	73	68	64	81	73	67	64	72	67	63	71	66	63	70	66	63	62																			
9	79	70	64	60	78	69	64	60	68	64	60	67	63	60	67	63	60	59																			
10	76	67	61	58	75	66	61	57	65	61	57	65	60	57	64	60	57	56																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	166873
5°	152239
10°	111321
15°	63332
20°	38556
25°	31236
30°	25637
35°	20706
40°	16359
45°	12435
50°	6303
55°	1415
60°	877
65°	441
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 12435 cd/sqm



TEST NUMBER: P642954

CATALOG NUMBER: ML5615LSNFL259FS1E - 693BB - 900LM - 4000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	239.0	21.1
10°-20°	320.7	28.2
20°-30°	237.8	21.0
30°-40°	194.1	17.1
40°-50°	118.6	10.4
50°-60°	21.5	1.9
60°-70°	3.5	0.3
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	797.5	70.3
0°-40°	991.6	87.4
0°-60°	1131.6	99.7
0°-90°	1135.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1135.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3044	
5°	2766	239
15°	1116	321
25°	516	238
35°	309	194
45°	160	119
55°	15	21
65°	3	3
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P642954

CATALOG NUMBER: ML5615LSNFL259FS1E - 693BB - 900LM - 4000K

CANDELA DISTRIBUTION (FULL):

	0°
0°	3044.0
2.5°	2982.6
5°	2766.5
7.5°	2417.3
10°	1999.8
12.5°	1534.5
15°	1115.9
17.5°	823.6
20°	660.9
22.5°	576.7
25°	516.4
27.5°	458.4
30°	405.0
32.5°	356.0
35°	309.4
37.5°	267.3
40°	228.6
42.5°	194.5
45°	160.4
47.5°	114.9
50°	73.9
52.5°	31.9
55°	14.8
57.5°	10.2
60°	8.0
62.5°	5.7
65°	3.4
67.5°	1.1
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)