

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P642963

Luminaire Tested: ML5615LSNFL259FS1E - 693SNB - 1500LM - 3500K

Issue Date: 2/17/2023

**Test Information**

Test Method: LM-79-2019  
Report Number: P642963  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-19)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/17/2023  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: HALO  
Catalog Number: ML5615LSNFL259FS1E - 693SNB - 1500LM - 3500K  
Description: ML56 RR, 25D TIR OPTIC, 6" SATIN NICKLE BAFFLE TRIM  
Light Source: (1) STANDARD SELECTABLE LUMEN LED 90CRI / 3500K CCT  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 1710.2 lumens  
Efficiency: N/A  
Efficacy: 100.0 lumens/watt  
Spacing Criteria (0/90/45): 0.43 / 0.43 / 0.44  
Luminous Opening: Circular (Dia: 0.5' x H: 0')  
CIE Type: Direct

Input Watts (W): 17.1  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



TEST NUMBER: P642963  
CATALOG NUMBER: ML5615LSNFL259FS1E - 693SNB - 1500LM - 3500K

### Luminous Intensity Polar Plot

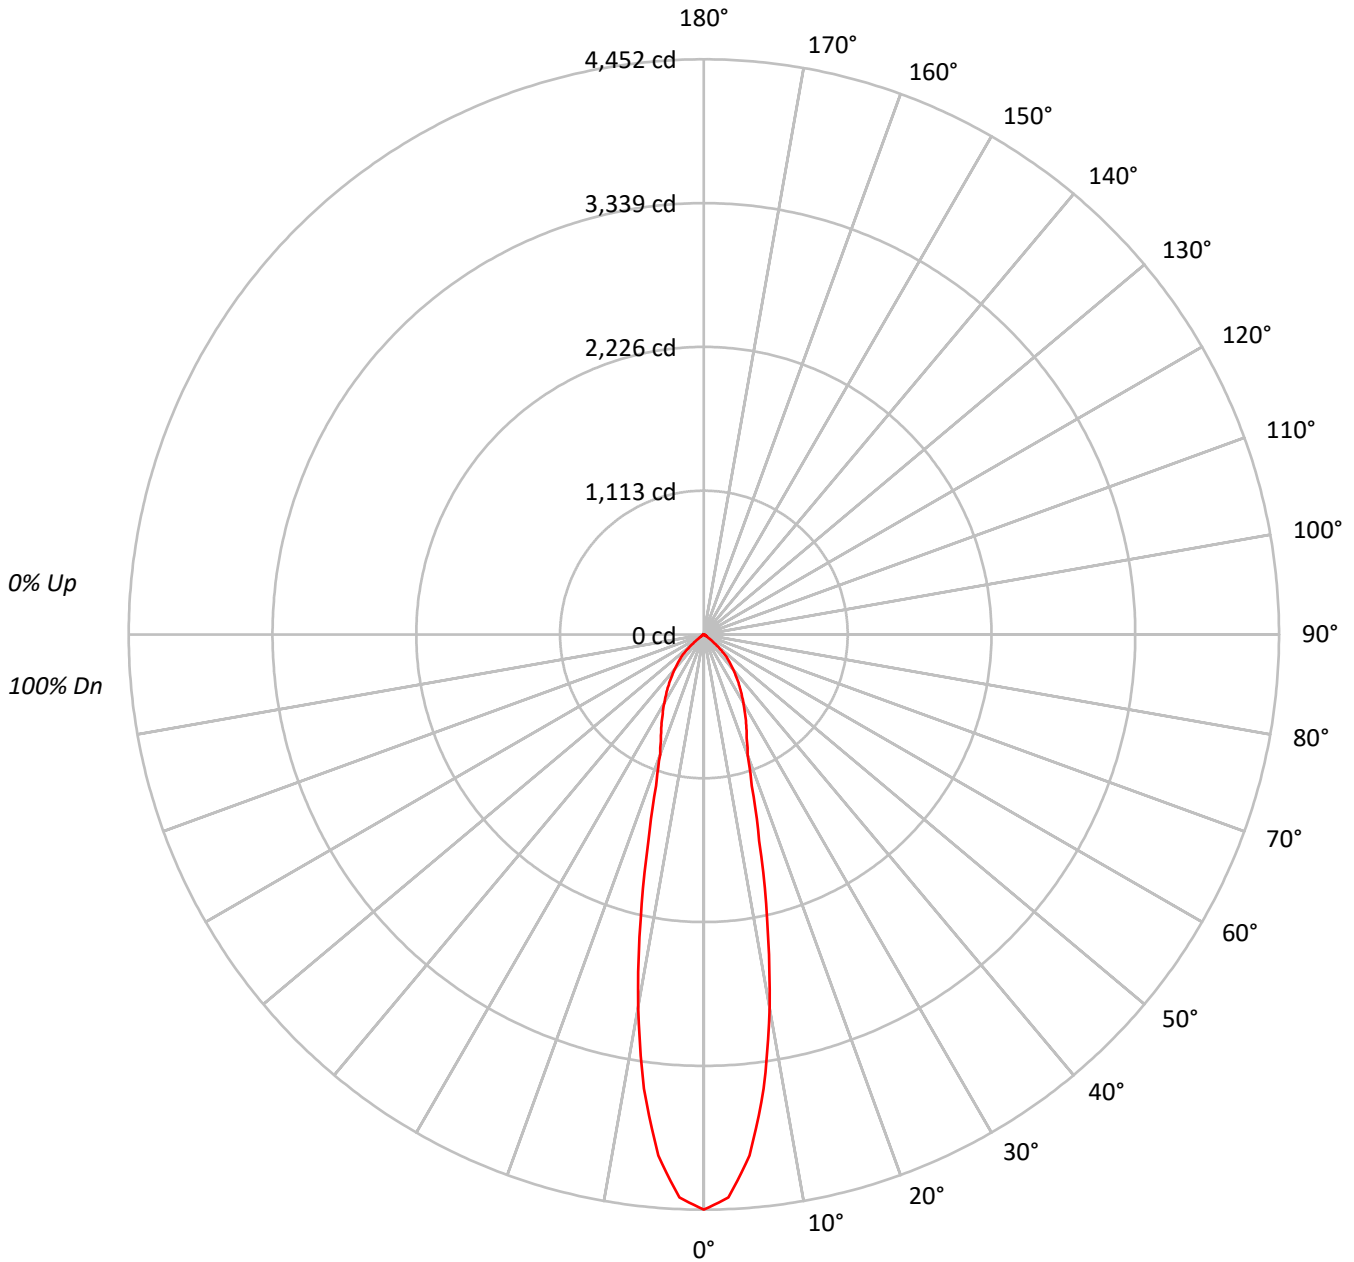



TEST NUMBER: P642963

CATALOG NUMBER: ML5615LSNFL259FS1E - 693SNB - 1500LM - 3500K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	114	111	109	106	111	109	107	105	105	103	102	101	100	99	98	97	96	94			
2	108	104	100	96	106	102	98	95	99	96	93	96	93	91	93	91	89	88			
3	103	97	92	88	101	96	91	88	93	89	86	90	87	85	88	86	84	82			
4	98	91	86	82	96	90	85	81	88	83	80	86	82	79	84	81	78	77			
5	94	86	80	76	92	85	79	75	83	78	75	81	77	74	80	76	73	72			
6	89	81	75	71	88	80	75	71	78	74	70	77	73	70	76	72	69	68			
7	85	76	71	67	84	76	70	66	74	70	66	73	69	66	72	68	65	64			
8	82	73	67	63	80	72	67	63	71	66	63	70	66	62	69	65	62	61			
9	78	69	63	60	77	69	63	60	68	63	59	67	62	59	66	62	59	58			
10	75	66	60	57	74	65	60	57	65	60	57	64	59	56	63	59	56	55			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	244032
5°	222738
10°	163062
15°	93934
20°	57761
25°	46981
30°	38772
35°	31755
40°	25262
45°	19475
50°	10362
55°	2667
60°	1623
65°	856
70°	256
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 19475 cd/sqm



TEST NUMBER: P642963

CATALOG NUMBER: ML5615LSNFL259FS1E - 693SNB - 1500LM - 3500K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	350.1	20.5
10°-20°	474.7	27.8
20°-30°	357.9	20.9
30°-40°	296.2	17.3
40°-50°	185.3	10.8
50°-60°	38.0	2.2
60°-70°	6.9	0.4
70°-80°	1.1	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1182.8	69.2
0°-40°	1479.0	86.5
0°-60°	1702.3	99.5
0°-90°	1710.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1710.2	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	4452	
5°	4048	350
15°	1655	475
25°	777	358
35°	474	296
45°	251	185
55°	28	38
65°	7	7
75°	0	1
85°	0	0
90°	0	



TEST NUMBER: P642963

CATALOG NUMBER: ML5615LSNFL259FS1E - 693SNB - 1500LM - 3500K

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	4451.5
2.5°	4362.8
5°	4047.6
7.5°	3546.7
10°	2929.3
12.5°	2259.4
15°	1655.1
17.5°	1229.9
20°	990.1
22.5°	867.0
25°	776.7
27.5°	691.3
30°	612.5
32.5°	540.2
35°	474.5
37.5°	408.9
40°	353.0
42.5°	298.8
45°	251.2
47.5°	182.3
50°	121.5
52.5°	57.5
55°	27.9
57.5°	19.7
60°	14.8
62.5°	9.9
65°	6.6
67.5°	3.3
70°	1.6
72.5°	1.6
75°	0.0
77.5°	1.6
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)