

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P642984

Luminaire Tested: ML5615LSNFL259FS1E - 693TBZB - 900LM - 4000K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P642984
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-20)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5615LSNFL259FS1E - 693TBZB - 900LM - 4000K
Description: ML56 RR, 25D TIR OPTIC, 6" TUSCON BRONZE BAFFLE TRIM
Light Source: (1) STANDARD SELECTABLE LUMEN LED 90CRI / 4000K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1149.3 lumens
Efficiency: N/A
Efficacy: 109.5 lumens/watt
Spacing Criteria (0/90/45): 0.43 / 0.43 / 0.44
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct

Input Watts (W): 10.5
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P642984
CATALOG NUMBER: ML5615LSNFL259FS1E - 693TBZB - 900LM - 4000K

Luminous Intensity Polar Plot

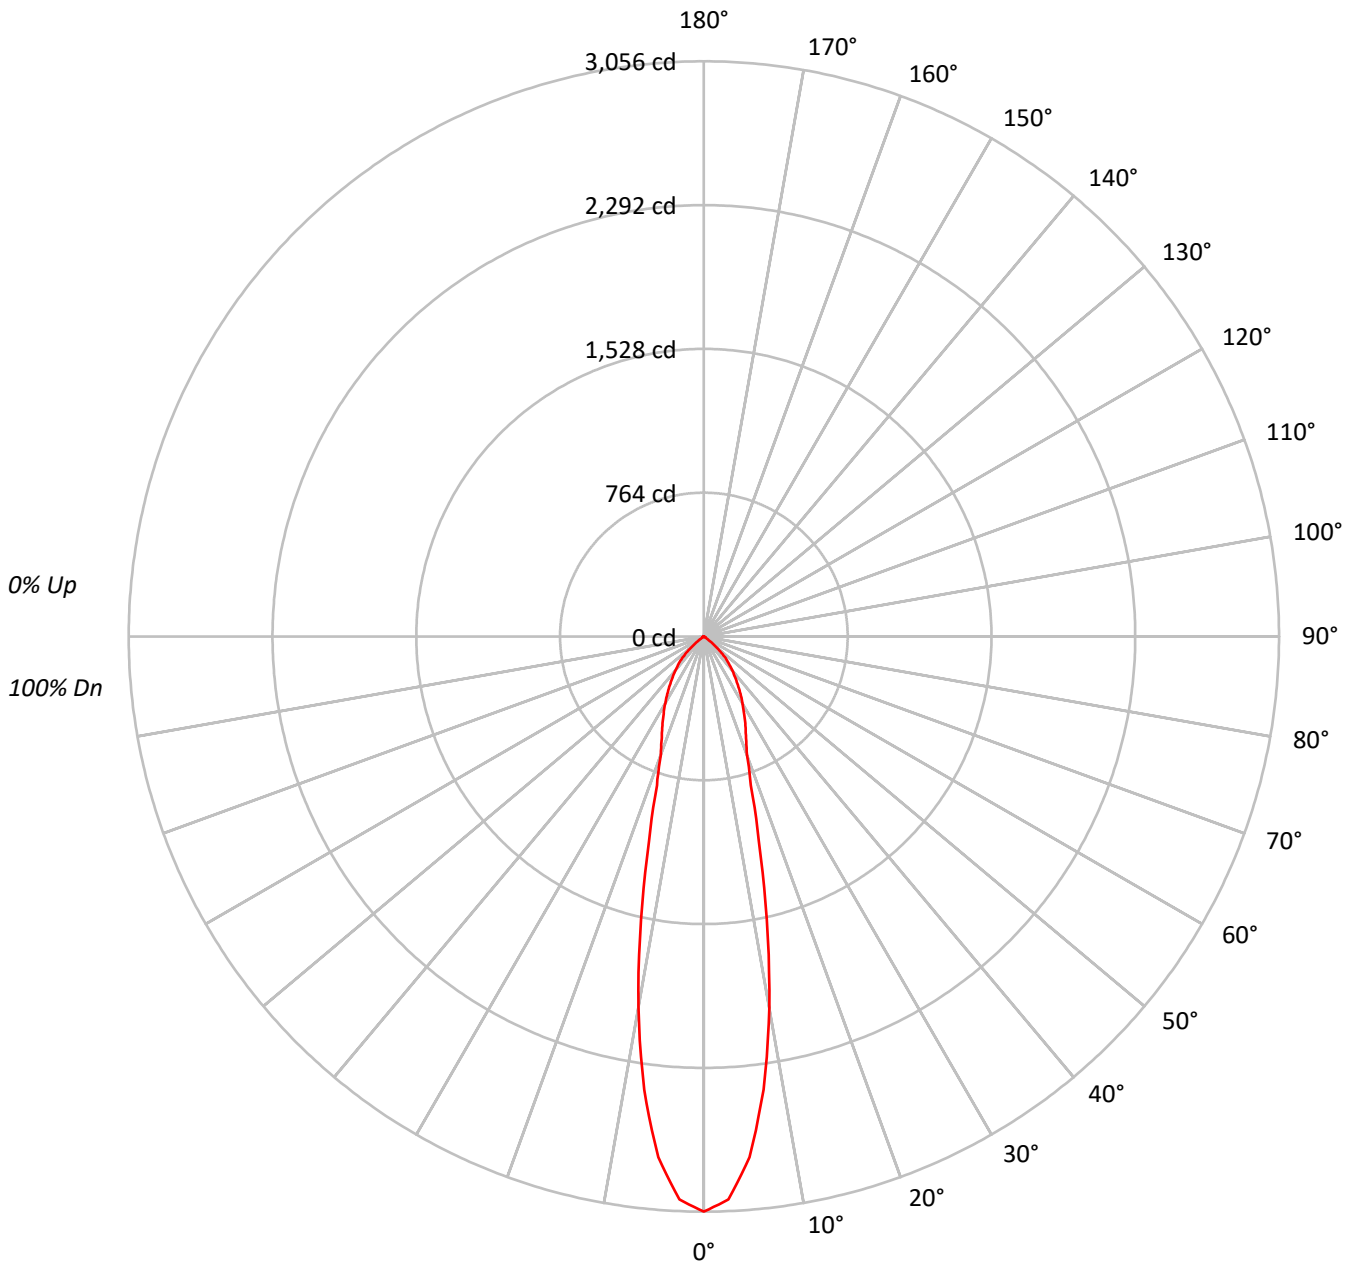



TEST NUMBER: P642984

CATALOG NUMBER: ML5615LSNFL259FS1E - 693TBZB - 900LM - 4000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	114	111	109	107	111	109	107	105	105	103	102	101	100	99	98	97	96	94			
2	108	104	100	97	106	102	99	96	99	96	93	96	94	91	93	91	90	88			
3	103	97	92	89	101	96	91	88	93	89	86	91	88	85	89	86	84	82			
4	98	91	86	82	97	90	85	81	88	84	80	86	82	79	84	81	79	77			
5	94	86	80	76	92	85	80	76	83	79	75	82	78	75	80	77	74	72			
6	90	81	75	71	88	80	75	71	79	74	71	77	73	70	76	73	70	68			
7	86	77	71	67	84	76	71	67	75	70	67	74	69	66	73	69	66	65			
8	82	73	67	63	81	72	67	63	71	66	63	70	66	63	69	65	63	61			
9	78	69	64	60	77	69	64	60	68	63	60	67	63	60	66	62	59	58			
10	75	66	61	57	74	66	61	57	65	60	57	64	60	57	64	60	57	56			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	167503
5°	152812
10°	111532
15°	63826
20°	38941
25°	31568
30°	25985
35°	21081
40°	16681
45°	12784
50°	6499
55°	1634
60°	998
65°	441
70°	176
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 12784 cd/sqm



TEST NUMBER: P642984

CATALOG NUMBER: ML5615LSNFL259FS1E - 693TBZB - 900LM - 4000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	239.9	20.9
10°-20°	322.6	28.1
20°-30°	240.4	20.9
30°-40°	197.5	17.2
40°-50°	121.6	10.6
50°-60°	23.1	2.0
60°-70°	3.7	0.3
70°-80°	0.4	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	802.9	69.9
0°-40°	1000.4	87.0
0°-60°	1145.1	99.6
0°-90°	1149.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1149.3	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3056	
5°	2777	240
15°	1125	323
25°	522	240
35°	315	197
45°	165	122
55°	17	23
65°	3	4
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P642984

CATALOG NUMBER: ML5615LSNFL259FS1E - 693TBZB - 900LM - 4000K

CANDELA DISTRIBUTION (FULL):

	0°
0°	3055.5
2.5°	2994.1
5°	2776.9
7.5°	2428.9
10°	2003.6
12.5°	1540.8
15°	1124.6
17.5°	830.1
20°	667.5
22.5°	583.4
25°	521.9
27.5°	462.8
30°	410.5
32.5°	361.6
35°	315.0
37.5°	272.9
40°	233.1
42.5°	199.0
45°	164.9
47.5°	118.3
50°	76.2
52.5°	34.1
55°	17.1
57.5°	11.4
60°	9.1
62.5°	5.7
65°	3.4
67.5°	1.1
70°	1.1
72.5°	1.1
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)