

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P642986

Luminaire Tested: ML5615LSNFL259FS1E - 693WB - 1200LM - 2700K

Issue Date: 2/17/2023

**Test Information**

Test Method: LM-79-2019  
Report Number: P642986  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-17)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/17/2023  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: HALO  
Catalog Number: ML5615LSNFL259FS1E - 693WB - 1200LM - 2700K  
Description: ML56 RR, 25D TIR OPTIC, 6" WHITE BAFFLE TRIM  
Light Source: (1) STANDARD SELECTABLE LUMEN LED 90CRI / 2700K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1349.5 lumens  
Efficiency: N/A  
Efficacy: 100.7 lumens/watt  
Spacing Criteria (0/90/45): 0.43 / 0.43 / 0.44  
Luminous Opening: Circular (Dia: 0.5' x H: 0')  
CIE Type: Direct


Input Watts (W): 13.4  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



TEST NUMBER: P642986

CATALOG NUMBER: ML5615LSNFL259FS1E - 693WB - 1200LM - 2700K

### Luminous Intensity Polar Plot

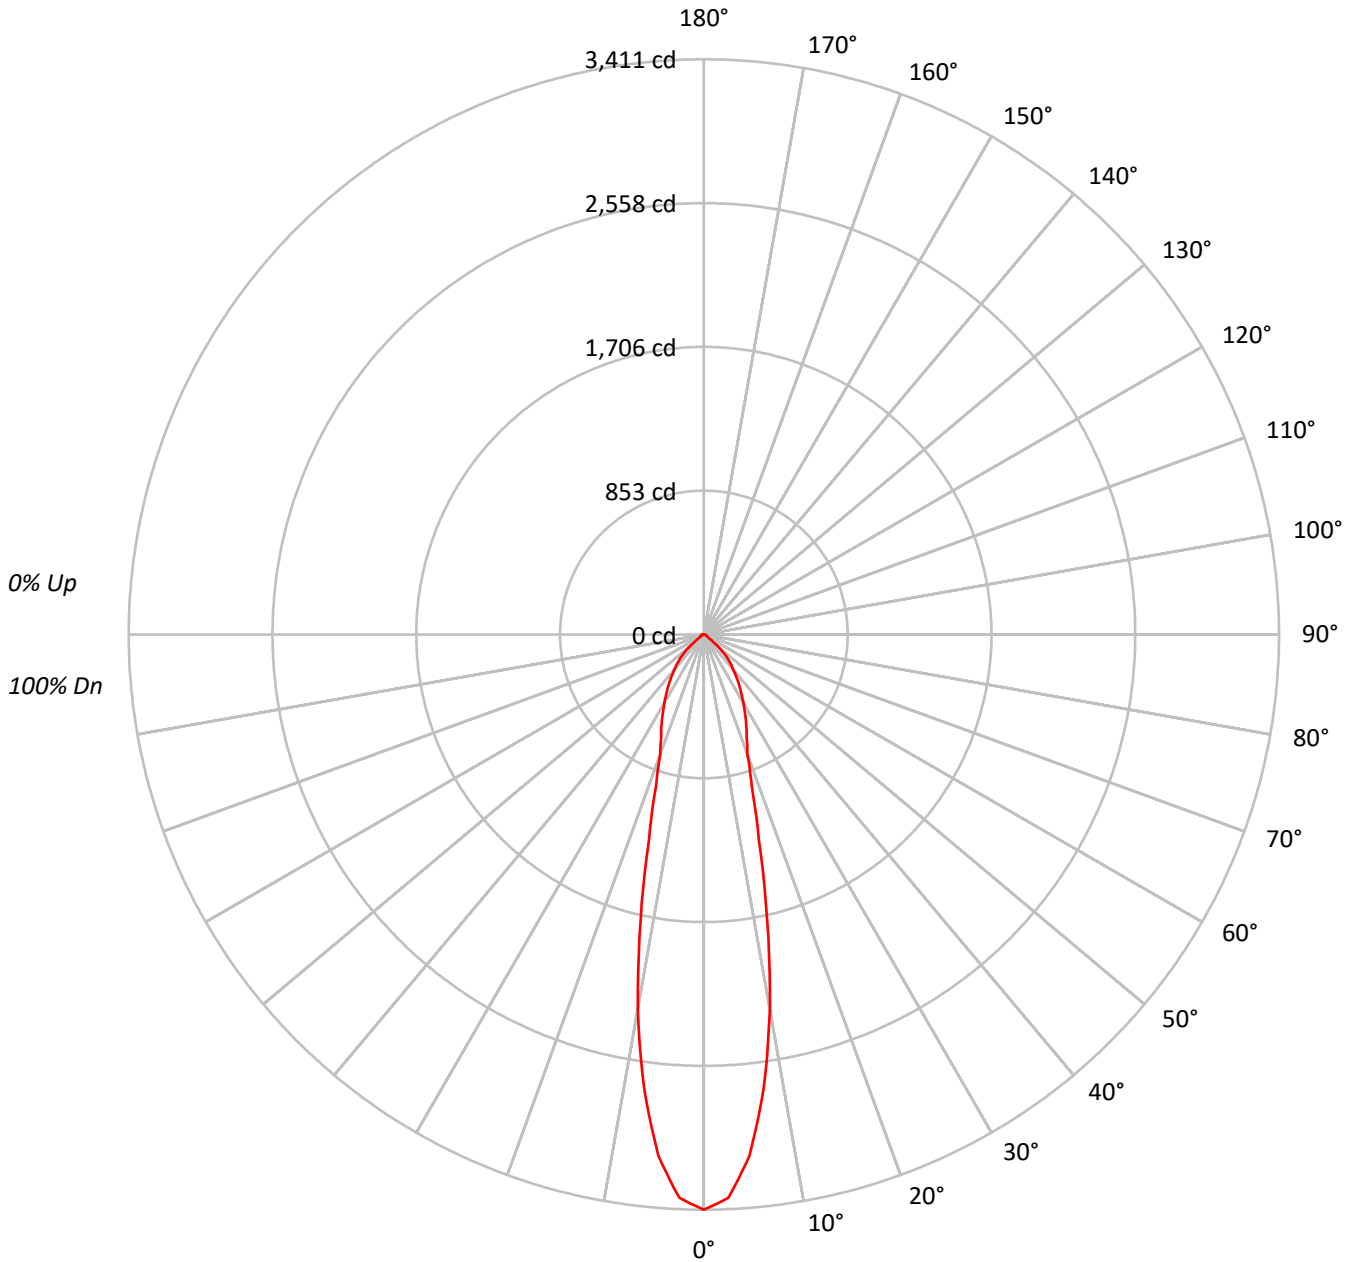



TEST NUMBER: P642986

CATALOG NUMBER: ML5615LSNFL259FS1E - 693WB - 1200LM - 2700K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	110	108	106	111	108	106	104	104	102	101	101	99	98	97	96	95	93																			
2	108	103	99	95	105	101	97	94	98	95	92	95	92	90	92	90	88	86																			
3	102	96	91	87	100	94	90	86	92	88	85	89	86	83	87	84	82	80																			
4	97	90	84	80	95	88	83	79	86	82	78	84	81	77	82	79	77	75																			
5	92	84	78	74	91	83	78	74	81	77	73	80	76	72	78	75	72	70																			
6	88	79	73	69	87	79	73	69	77	72	68	76	71	68	74	71	68	66																			
7	84	75	69	65	83	74	69	65	73	68	64	72	67	64	71	67	64	62																			
8	80	71	65	61	79	71	65	61	70	64	61	68	64	61	68	63	60	59																			
9	77	68	62	58	76	67	62	58	66	61	58	65	61	58	65	60	57	56																			
10	74	65	59	55	73	64	59	55	63	58	55	63	58	55	62	58	55	53																			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	187014
5°	170674
10°	125471
15°	71499
20°	44051
25°	35960
30°	29625
35°	24293
40°	19458
45°	15296
50°	8742
55°	3144
60°	2631
65°	2296
70°	2020
75°	2139
80°	2399
85°	2390

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 15296 cd/sqm



TEST NUMBER: P642986

CATALOG NUMBER: ML5615LSNFL259FS1E - 693WB - 1200LM - 2700K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	268.4	19.9
10°-20°	363.3	26.9
20°-30°	273.6	20.3
30°-40°	227.1	16.8
40°-50°	146.3	10.8
50°-60°	38.8	2.9
60°-70°	17.3	1.3
70°-80°	10.7	0.8
80°-90°	3.8	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	905.3	67.1
0°-40°	1132.5	83.9
0°-60°	1317.7	97.6
0°-90°	1349.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1349.5	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	3411	
5°	3102	268
15°	1260	363
25°	594	274
35°	363	227
45°	197	146
55°	33	39
65°	18	17
75°	10	11
85°	4	4
90°	0	



TEST NUMBER: P642986

CATALOG NUMBER: ML5615LSNFL259FS1E - 693WB - 1200LM - 2700K

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	3411.4
2.5°	3344.3
5°	3101.5
7.5°	2715.7
10°	2254.0
12.5°	1731.6
15°	1259.8
17.5°	942.3
20°	755.1
22.5°	662.8
25°	594.5
27.5°	528.7
30°	468.0
32.5°	413.6
35°	363.0
37.5°	315.0
40°	271.9
42.5°	234.0
45°	197.3
47.5°	146.7
50°	102.5
52.5°	53.1
55°	32.9
57.5°	26.6
60°	24.0
62.5°	20.2
65°	17.7
67.5°	13.9
70°	12.6
72.5°	11.4
75°	10.1
77.5°	8.9
80°	7.6
82.5°	5.1
85°	3.8
87.5°	1.3
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)