

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P642998

Luminaire Tested: ML5615LSNFL259FS1E - 693WB - 900LM - 3500K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P642998
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-17)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5615LSNFL259FS1E - 693WB - 900LM - 3500K
Description: ML56 RR, 25D TIR OPTIC, 6" WHITE BAFFLE TRIM
Light Source: (1) STANDARD SELECTABLE LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1127.4 lumens
Efficiency: N/A
Efficacy: 107.4 lumens/watt
Spacing Criteria (0/90/45): 0.43 / 0.43 / 0.44
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct


Input Watts (W): 10.5
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P642998

CATALOG NUMBER: ML5615LSNFL259FS1E - 693WB - 900LM - 3500K

Luminous Intensity Polar Plot

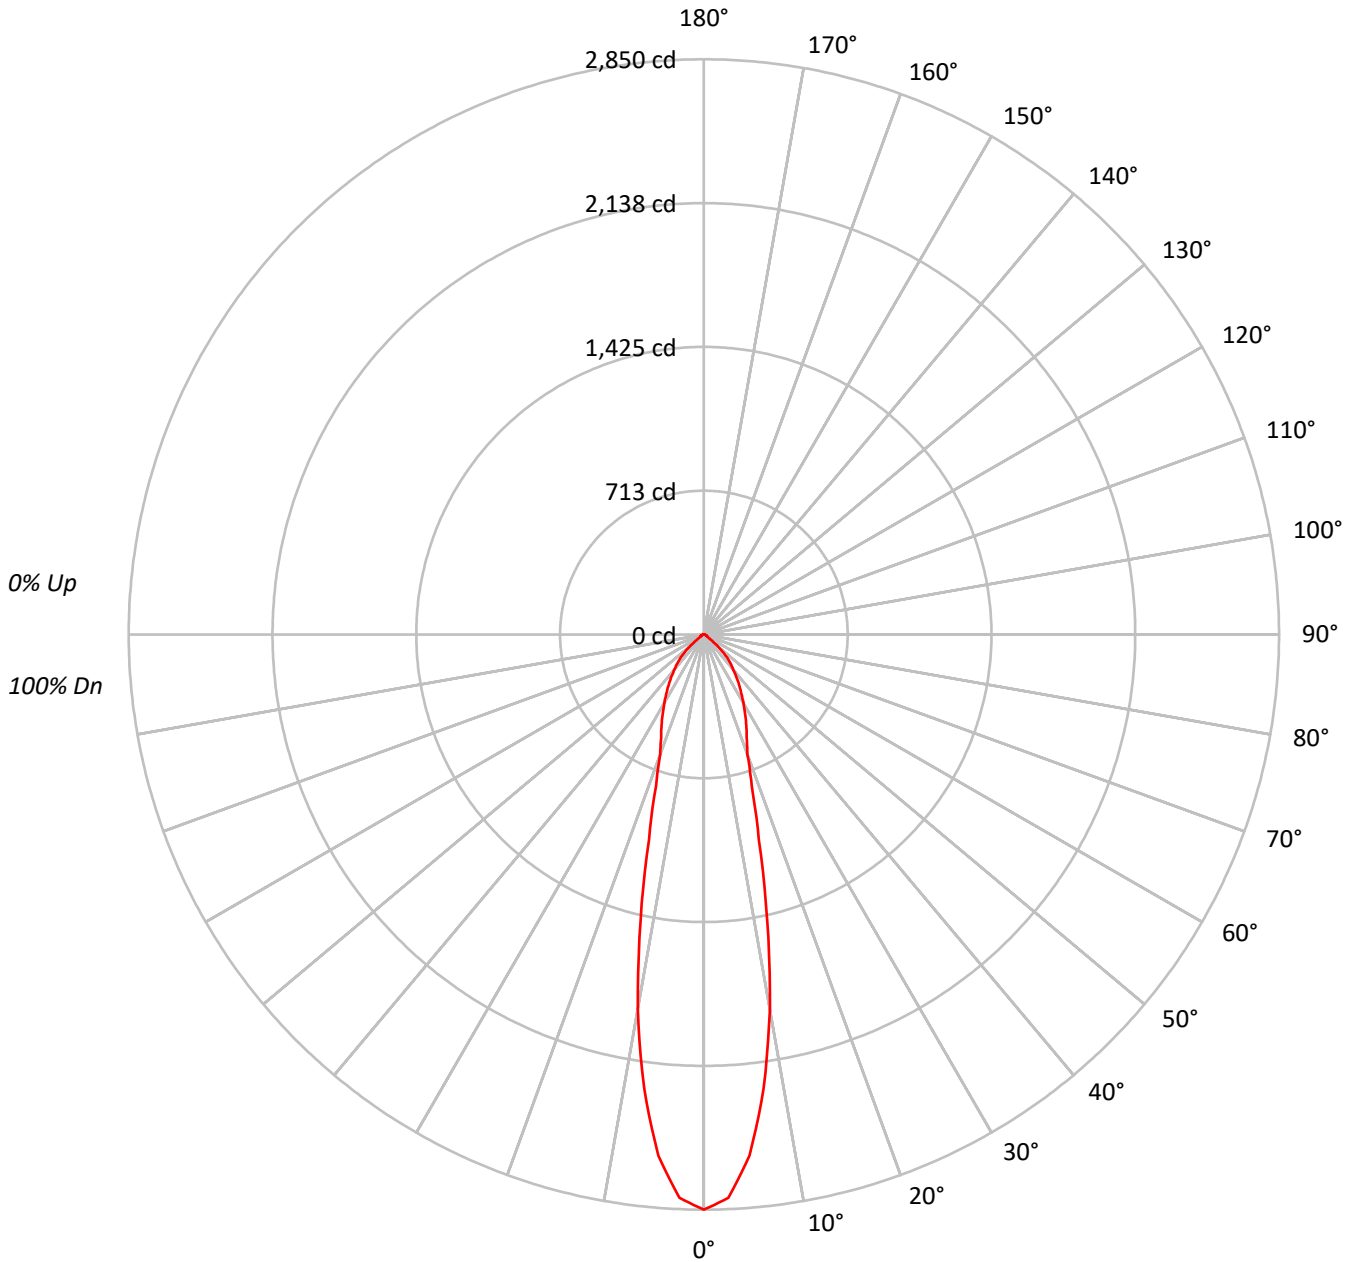



TEST NUMBER: P642998

CATALOG NUMBER: ML5615LSNFL259FS1E - 693WB - 900LM - 3500K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	110	108	106	111	108	106	104	104	102	101	101	99	98	97	96	95	93																			
2	108	103	99	95	105	101	97	94	98	95	92	95	92	90	92	90	88	86																			
3	102	96	91	87	100	94	90	86	92	88	85	89	86	83	87	84	82	80																			
4	97	90	84	80	95	88	83	79	86	82	78	84	81	77	82	79	77	75																			
5	92	84	78	74	91	83	78	74	81	77	73	80	76	72	78	75	72	70																			
6	88	79	73	69	87	79	73	69	77	72	68	76	71	68	74	71	68	66																			
7	84	75	69	65	83	74	69	65	73	68	64	72	67	64	71	67	64	62																			
8	80	71	65	61	79	71	65	61	70	64	61	68	64	61	68	63	60	59																			
9	77	68	62	58	76	67	62	58	66	61	58	65	61	58	65	60	57	56																			
10	74	65	59	55	73	64	59	55	63	58	55	63	58	55	62	58	55	53																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	156227
5°	142582
10°	104819
15°	59728
20°	36800
25°	30038
30°	24751
35°	20298
40°	16259
45°	12777
50°	7300
55°	2628
60°	2204
65°	1920
70°	1699
75°	1800
80°	1989
85°	2013

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 12777 cd/sqm



TEST NUMBER: P642998

CATALOG NUMBER: ML5615LSNFL259FS1E - 693WB - 900LM - 3500K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	224.2	19.9
10°-20°	303.5	26.9
20°-30°	228.6	20.3
30°-40°	189.7	16.8
40°-50°	122.3	10.8
50°-60°	32.5	2.9
60°-70°	14.5	1.3
70°-80°	8.9	0.8
80°-90°	3.2	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	756.3	67.1
0°-40°	946.1	83.9
0°-60°	1100.8	97.6
0°-90°	1127.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1127.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2850	
5°	2591	224
15°	1052	303
25°	497	229
35°	303	190
45°	165	122
55°	28	32
65°	15	14
75°	8	9
85°	3	3
90°	0	



TEST NUMBER: P642998

CATALOG NUMBER: ML5615LSNFL259FS1E - 693WB - 900LM - 3500K

CANDELA DISTRIBUTION (FULL):

	0°
0°	2849.8
2.5°	2793.8
5°	2591.0
7.5°	2268.7
10°	1883.0
12.5°	1446.6
15°	1052.4
17.5°	787.2
20°	630.8
22.5°	553.7
25°	496.6
27.5°	441.7
30°	391.0
32.5°	345.5
35°	303.3
37.5°	263.1
40°	227.2
42.5°	195.5
45°	164.8
47.5°	122.6
50°	85.6
52.5°	44.4
55°	27.5
57.5°	22.2
60°	20.1
62.5°	16.9
65°	14.8
67.5°	11.6
70°	10.6
72.5°	9.5
75°	8.5
77.5°	7.4
80°	6.3
82.5°	4.2
85°	3.2
87.5°	1.1
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)