

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P643020

Luminaire Tested: ML5615LSNFL259FS1E - 694WB - 1200LM - 5000K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P643020
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-21)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5615LSNFL259FS1E - 694WB - 1200LM - 5000K
Description: ML56 RR, 25D TIR OPTIC, 6" WHITE GIMBAL TRIM
Light Source: (1) STANDARD SELECTABLE LUMEN LED 90CRI / 5000K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1575.1 lumens
Efficiency: N/A
Efficacy: 117.5 lumens/watt
Spacing Criteria (0/90/45): 0.42 / 0.42 / 0.43
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct

Input Watts (W): 13.4
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P643020
CATALOG NUMBER: ML5615LSNFL259FS1E - 694WB - 1200LM - 5000K

Luminous Intensity Polar Plot

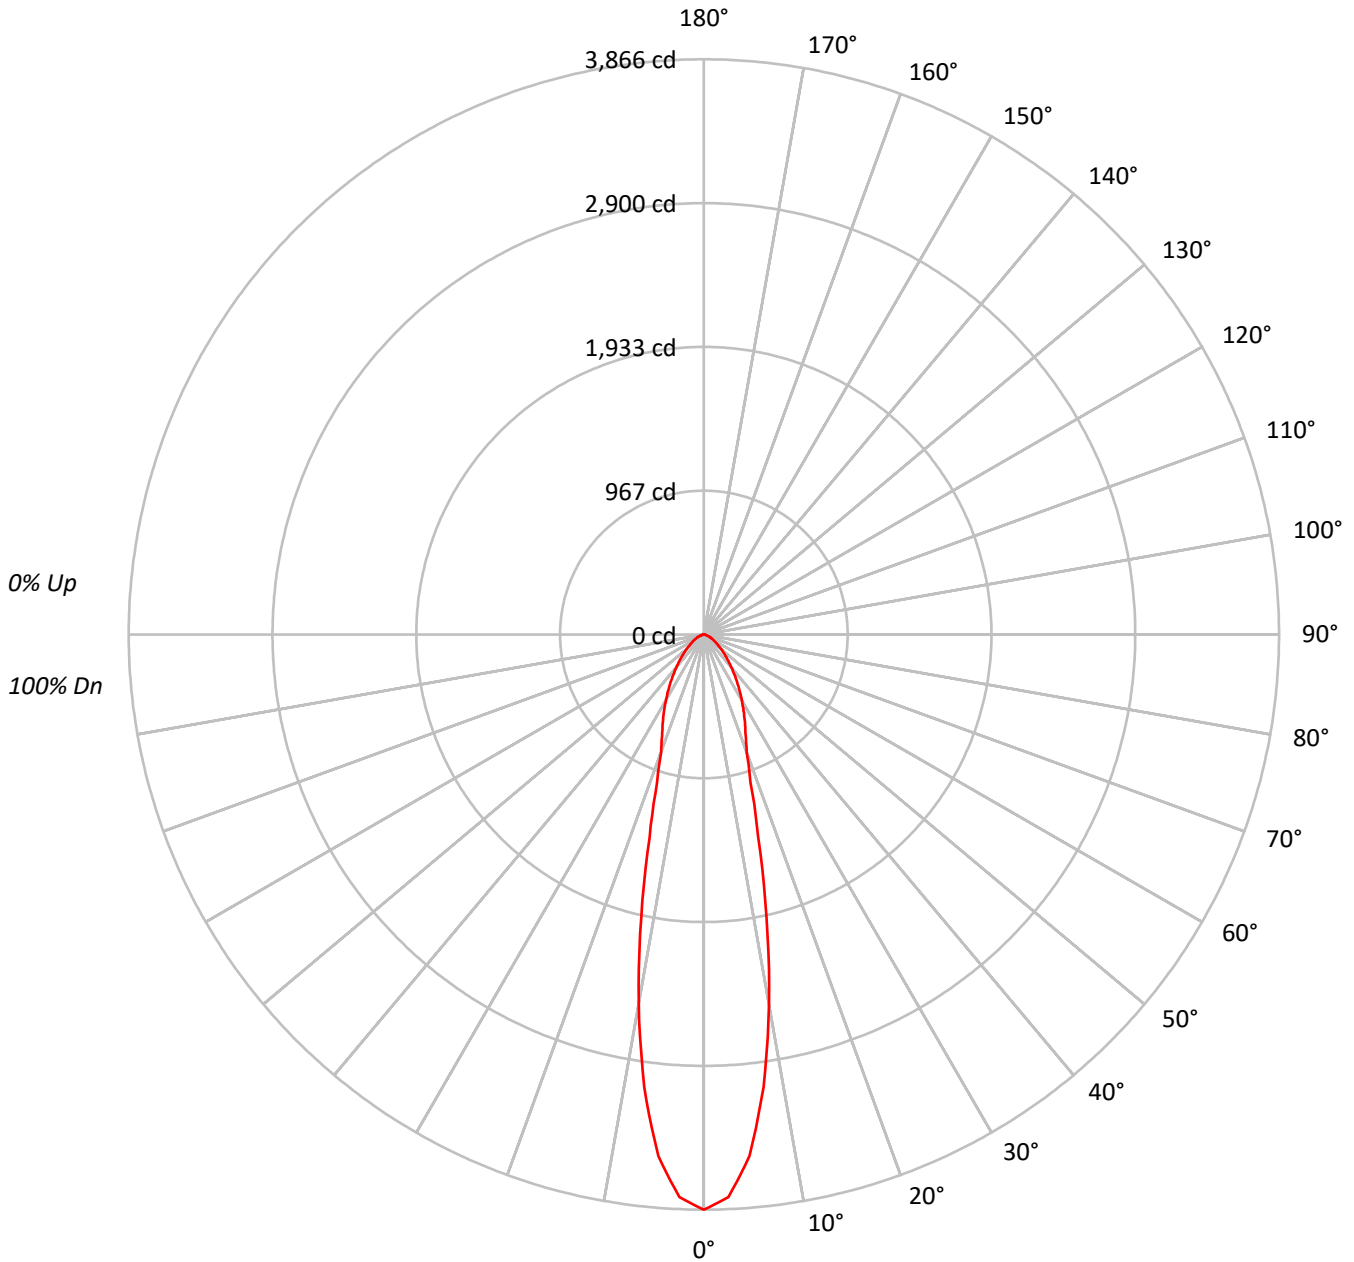



TEST NUMBER: P643020

CATALOG NUMBER: ML5615LSNFL259FS1E - 694WB - 1200LM - 5000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	110	107	105	111	108	105	103	104	102	100	100	99	97	97	95	94	92																			
2	107	102	97	94	105	100	96	93	97	93	91	94	91	89	91	89	87	85																			
3	101	94	89	85	99	93	88	84	90	86	83	88	84	81	85	83	80	78																			
4	96	88	82	78	94	87	81	77	85	80	76	82	78	75	81	77	74	73																			
5	91	82	76	72	89	81	76	71	79	74	71	78	73	70	76	72	69	68																			
6	87	77	71	67	85	76	71	66	75	70	66	74	69	66	72	68	65	64																			
7	82	73	67	62	81	72	66	62	71	66	62	70	65	62	69	64	61	60																			
8	79	69	63	59	77	69	63	59	67	62	58	66	62	58	65	61	58	57																			
9	75	66	60	56	74	65	60	56	64	59	55	63	59	55	62	58	55	54																			
10	72	63	57	53	71	62	57	53	61	56	53	61	56	53	60	56	52	51																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	211946
5°	193528
10°	140462
15°	79966
20°	48987
25°	39486
30°	32220
35°	25886
40°	20474
45°	16164
50°	12631
55°	9892
60°	7883
65°	6343
70°	4616
75°	2436
80°	1831
85°	881

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 16164 cd/sqm



TEST NUMBER: P643020

CATALOG NUMBER: ML5615LSNFL259FS1E - 694WB - 1200LM - 5000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	303.2	19.2
10°-20°	405.8	25.8
20°-30°	300.8	19.1
30°-40°	242.8	15.4
40°-50°	162.5	10.3
50°-60°	94.3	6.0
60°-70°	49.4	3.1
70°-80°	14.4	0.9
80°-90°	2.0	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1009.7	64.1
0°-40°	1252.6	79.5
0°-60°	1509.4	95.8
0°-90°	1575.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1575.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3866	
5°	3517	303
15°	1409	406
25°	653	301
35°	387	243
45°	208	162
55°	104	94
65°	49	49
75°	12	14
85°	1	2
90°	0	



TEST NUMBER: P643020

CATALOG NUMBER: ML5615LSNFL259FS1E - 694WB - 1200LM - 5000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	3866.2
2.5°	3785.7
5°	3516.8
7.5°	3068.2
10°	2523.3
12.5°	1943.9
15°	1409.0
17.5°	1043.8
20°	839.7
22.5°	731.8
25°	652.8
27.5°	578.0
30°	509.0
32.5°	445.7
35°	386.8
37.5°	333.6
40°	286.1
42.5°	245.9
45°	208.5
47.5°	175.4
50°	148.1
52.5°	123.6
55°	103.5
57.5°	86.3
60°	71.9
62.5°	60.4
65°	48.9
67.5°	40.3
70°	28.8
72.5°	18.7
75°	11.5
77.5°	7.2
80°	5.8
82.5°	2.9
85°	1.4
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)