

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P643027

Luminaire Tested: ML5615LSNFL259FS1E - 694WB - 900LM - 3000K

Issue Date: 2/17/2023

**Test Information**

Test Method: LM-79-2019  
Report Number: P643027  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-21)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/17/2023  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: HALO  
Catalog Number: ML5615LSNFL259FS1E - 694WB - 900LM - 3000K  
Description: ML56 RR, 25D TIR OPTIC, 6" WHITE GIMBAL TRIM  
Light Source: (1) STANDARD SELECTABLE LUMEN LED 90CRI / 3000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1126.3 lumens  
Efficiency: N/A  
Efficacy: 107.3 lumens/watt  
Spacing Criteria (0/90/45): 0.42 / 0.42 / 0.43  
Luminous Opening: Circular (Dia: 0.5' x H: 0')  
CIE Type: Direct


Input Watts (W): 10.5  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



TEST NUMBER: P643027

CATALOG NUMBER: ML5615LSNFL259FS1E - 694WB - 900LM - 3000K

### Luminous Intensity Polar Plot

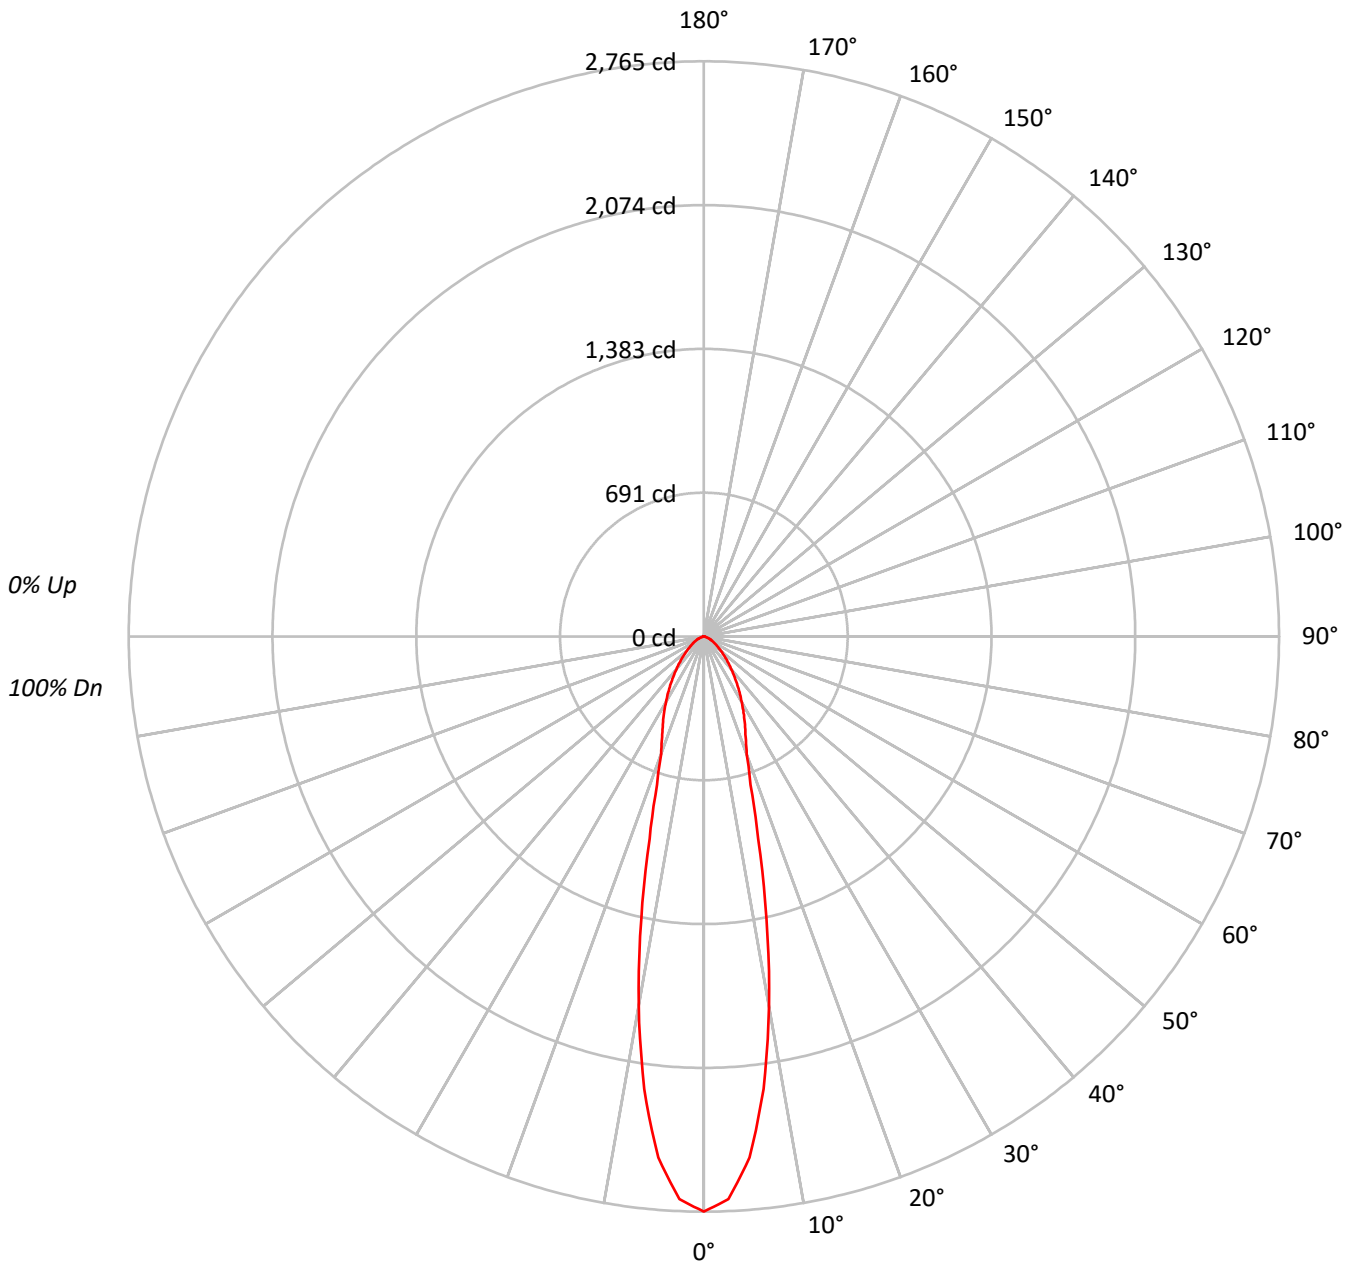



TEST NUMBER: P643027

CATALOG NUMBER: ML5615LSNFL259FS1E - 694WB - 900LM - 3000K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |    |   |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|----|---|
| RF  | 20  |     |     |     |     | 20  |     |     |     |     | 20  |     |     |     |     | 20  |     |     |    |    | 20 |   |
| RC  | 80  |     |     |     |     | 70  |     |     |     |     | 50  |     |     |     |     | 30  |     |     |    |    | 10 | 0 |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30 | 10 | 0  |   |
| RCR |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |    |   |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 |    |    |    |   |
| 1   | 113 | 110 | 107 | 105 | 111 | 108 | 105 | 103 | 104 | 102 | 100 | 100 | 99  | 97  | 97  | 95  | 94  | 92  |    |    |    |   |
| 2   | 107 | 102 | 97  | 94  | 105 | 100 | 96  | 93  | 97  | 93  | 91  | 94  | 91  | 89  | 91  | 89  | 87  | 85  |    |    |    |   |
| 3   | 101 | 94  | 89  | 85  | 99  | 93  | 88  | 84  | 90  | 86  | 83  | 88  | 84  | 81  | 85  | 83  | 80  | 78  |    |    |    |   |
| 4   | 96  | 88  | 82  | 78  | 94  | 87  | 81  | 77  | 85  | 80  | 76  | 82  | 78  | 75  | 81  | 77  | 74  | 73  |    |    |    |   |
| 5   | 91  | 82  | 76  | 72  | 89  | 81  | 76  | 71  | 79  | 74  | 71  | 78  | 73  | 70  | 76  | 72  | 69  | 68  |    |    |    |   |
| 6   | 87  | 77  | 71  | 67  | 85  | 77  | 71  | 66  | 75  | 70  | 66  | 74  | 69  | 66  | 72  | 68  | 65  | 64  |    |    |    |   |
| 7   | 82  | 73  | 67  | 62  | 81  | 72  | 66  | 62  | 71  | 66  | 62  | 70  | 65  | 62  | 69  | 64  | 61  | 60  |    |    |    |   |
| 8   | 79  | 69  | 63  | 59  | 77  | 69  | 63  | 59  | 67  | 62  | 58  | 66  | 62  | 58  | 65  | 61  | 58  | 57  |    |    |    |   |
| 9   | 75  | 66  | 60  | 56  | 74  | 65  | 60  | 56  | 64  | 59  | 55  | 63  | 59  | 55  | 62  | 58  | 55  | 54  |    |    |    |   |
| 10  | 72  | 63  | 57  | 53  | 71  | 62  | 57  | 53  | 61  | 56  | 53  | 61  | 56  | 53  | 60  | 56  | 52  | 51  |    |    |    |   |

**AVERAGE LUMINANCE (cd/sqm):**

|     |        |
|-----|--------|
|     | 0°     |
| 0°  | 151561 |
| 5°  | 138394 |
| 10° | 100443 |
| 15° | 57185  |
| 20° | 35026  |
| 25° | 28236  |
| 30° | 23042  |
| 35° | 18511  |
| 40° | 14642  |
| 45° | 11559  |
| 50° | 9032   |
| 55° | 7073   |
| 60° | 5636   |
| 65° | 4540   |
| 70° | 3302   |
| 75° | 1737   |
| 80° | 1294   |
| 85° | 629    |

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 11559 cd/sqm



TEST NUMBER: P643027

CATALOG NUMBER: ML5615LSNFL259FS1E - 694WB - 900LM - 3000K

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 216.8  | 19.3      |
| 10°-20°   | 290.2  | 25.8      |
| 20°-30°   | 215.1  | 19.1      |
| 30°-40°   | 173.6  | 15.4      |
| 40°-50°   | 116.2  | 10.3      |
| 50°-60°   | 67.4   | 6.0       |
| 60°-70°   | 35.3   | 3.1       |
| 70°-80°   | 10.3   | 0.9       |
| 80°-90°   | 1.4    | 0.1       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| 0°-30°    | 722.0  | 64.1      |
| 0°-40°    | 895.7  | 79.5      |
| 0°-60°    | 1079.3 | 95.8      |
| 0°-90°    | 1126.3 | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 1126.3 | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°   | Flux |
|-----|------|------|
| 0°  | 2765 |      |
| 5°  | 2515 | 217  |
| 15° | 1008 | 290  |
| 25° | 467  | 215  |
| 35° | 277  | 174  |
| 45° | 149  | 116  |
| 55° | 74   | 67   |
| 65° | 35   | 35   |
| 75° | 8    | 10   |
| 85° | 1    | 1    |
| 90° | 0    |      |



TEST NUMBER: P643027

CATALOG NUMBER: ML5615LSNFL259FS1E - 694WB - 900LM - 3000K

**CANDELA DISTRIBUTION (FULL):**

| 0°    |        |
|-------|--------|
| 0°    | 2764.7 |
| 2.5°  | 2707.1 |
| 5°    | 2514.9 |
| 7.5°  | 2194.1 |
| 10°   | 1804.4 |
| 12.5° | 1390.1 |
| 15°   | 1007.6 |
| 17.5° | 746.4  |
| 20°   | 600.4  |
| 22.5° | 523.3  |
| 25°   | 466.8  |
| 27.5° | 413.3  |
| 30°   | 364.0  |
| 32.5° | 318.7  |
| 35°   | 276.6  |
| 37.5° | 238.5  |
| 40°   | 204.6  |
| 42.5° | 175.8  |
| 45°   | 149.1  |
| 47.5° | 125.4  |
| 50°   | 105.9  |
| 52.5° | 88.4   |
| 55°   | 74.0   |
| 57.5° | 61.7   |
| 60°   | 51.4   |
| 62.5° | 43.2   |
| 65°   | 35.0   |
| 67.5° | 28.8   |
| 70°   | 20.6   |
| 72.5° | 13.4   |
| 75°   | 8.2    |
| 77.5° | 5.1    |
| 80°   | 4.1    |
| 82.5° | 2.1    |
| 85°   | 1.0    |
| 87.5° | 0.0    |
| 90°   | 0.0    |

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)