

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P643033

Luminaire Tested: ML5615LSNFL259FS1E - 696WB - 1200LM - 3500K

Issue Date: 2/17/2023

**Test Information**

Test Method: LM-79-2019  
Report Number: P643033  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-23)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/17/2023  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: HALO  
Catalog Number: ML5615LSNFL259FS1E - 696WB - 1200LM - 3500K  
Description: ML56 RR, 25D TIR OPTIC, 6" SHALLOW WHITE BAFFLE TRIM  
Light Source: (1) STANDARD SELECTABLE LUMEN LED 90CRI / 3500K CCT  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 1452.5 lumens  
Efficiency: N/A  
Efficacy: 108.4 lumens/watt  
Spacing Criteria (0/90/45): 0.43 / 0.43 / 0.44  
Luminous Opening: Circular (Dia: 0.5' x H: 0')  
CIE Type: Direct

Input Watts (W): 13.4  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



TEST NUMBER: P643033  
CATALOG NUMBER: ML5615LSNFL259FS1E - 696WB - 1200LM - 3500K

### Luminous Intensity Polar Plot

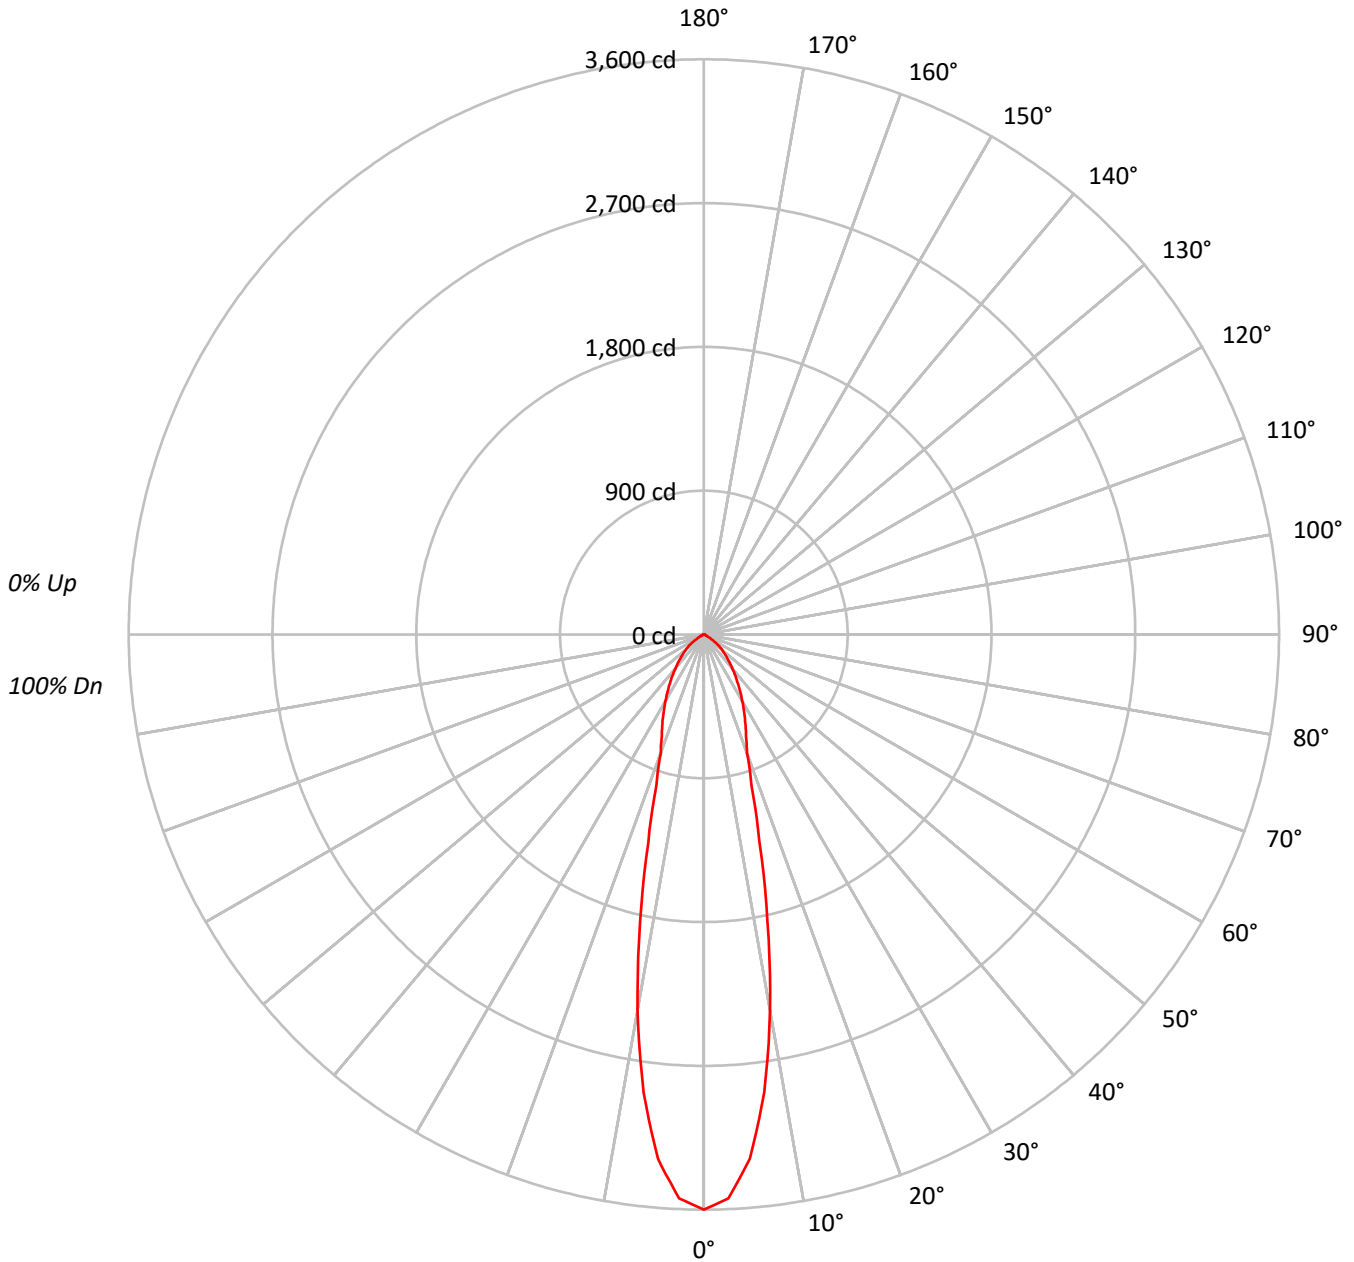



TEST NUMBER: P643033

CATALOG NUMBER: ML5615LSNFL259FS1E - 696WB - 1200LM - 3500K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	110	108	106	111	108	106	104	104	102	101	100	99	98	97	96	95	93																			
2	107	102	98	95	105	101	97	94	97	94	92	94	92	90	92	90	88	86																			
3	102	95	90	86	100	94	89	85	91	87	84	89	85	83	87	84	81	80																			
4	97	89	83	79	95	88	83	79	86	81	78	84	80	77	82	78	76	74																			
5	92	83	77	73	90	82	77	73	81	76	72	79	75	71	77	74	71	69																			
6	87	78	72	68	86	78	72	68	76	71	67	75	70	67	73	70	67	65																			
7	83	74	68	64	82	73	68	64	72	67	63	71	66	63	70	66	63	61																			
8	80	70	64	60	78	70	64	60	69	63	60	68	63	60	67	62	59	58																			
9	76	67	61	57	75	66	61	57	65	60	57	64	60	57	64	59	56	55																			
10	73	64	58	54	72	63	58	54	62	57	54	62	57	54	61	57	54	52																			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	197358
5°	181278
10°	132886
15°	76346
20°	46058
25°	37169
30°	30441
35°	24675
40°	19787
45°	15746
50°	12418
55°	8678
60°	3805
65°	2257
70°	1715
75°	1419
80°	1263
85°	1698

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 15746 cd/sqm



TEST NUMBER: P643033

CATALOG NUMBER: ML5615LSNFL259FS1E - 696WB - 1200LM - 3500K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	284.9	19.6
10°-20°	384.9	26.5
20°-30°	283.4	19.5
30°-40°	231.5	15.9
40°-50°	158.2	10.9
50°-60°	80.6	5.6
60°-70°	19.1	1.3
70°-80°	7.2	0.5
80°-90°	2.7	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	953.1	65.6
0°-40°	1184.6	81.6
0°-60°	1423.5	98.0
0°-90°	1452.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1452.5	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	3600	
5°	3294	285
15°	1345	385
25°	614	283
35°	369	232
45°	203	158
55°	91	81
65°	17	19
75°	7	7
85°	3	3
90°	0	



TEST NUMBER: P643033

CATALOG NUMBER: ML5615LSNFL259FS1E - 696WB - 1200LM - 3500K

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	3600.1
2.5°	3532.0
5°	3294.2
7.5°	2890.8
10°	2387.2
12.5°	1842.1
15°	1345.2
17.5°	989.9
20°	789.5
22.5°	689.3
25°	614.5
27.5°	545.0
30°	480.9
32.5°	422.1
35°	368.7
37.5°	320.6
40°	276.5
42.5°	237.8
45°	203.1
47.5°	172.3
50°	145.6
52.5°	121.6
55°	90.8
57.5°	61.4
60°	34.7
62.5°	22.7
65°	17.4
67.5°	14.7
70°	10.7
72.5°	8.0
75°	6.7
77.5°	5.3
80°	4.0
82.5°	4.0
85°	2.7
87.5°	1.3
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)