

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P643046

Luminaire Tested: ML5615LSVWFL759FS1E - 591WB - 1200LM - 2700K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P643046
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-70)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5615LSVWFL759FS1E - 591WB - 1200LM - 2700K
Description: ML56 RR, 75D TIR OPTIC, 5" DEADFRONT TRIM
Light Source: (1) STANDARD SELECTABLE LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1376.1 lumens
Efficiency: N/A
Efficacy: 102.7 lumens/watt
Spacing Criteria (0/90/45): 1.19 / 1.19 / 1.09
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct

Input Watts (W): 13.4
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P643046
CATALOG NUMBER: ML5615LSVWFL759FS1E - 591WB - 1200LM - 2700K

Luminous Intensity Polar Plot

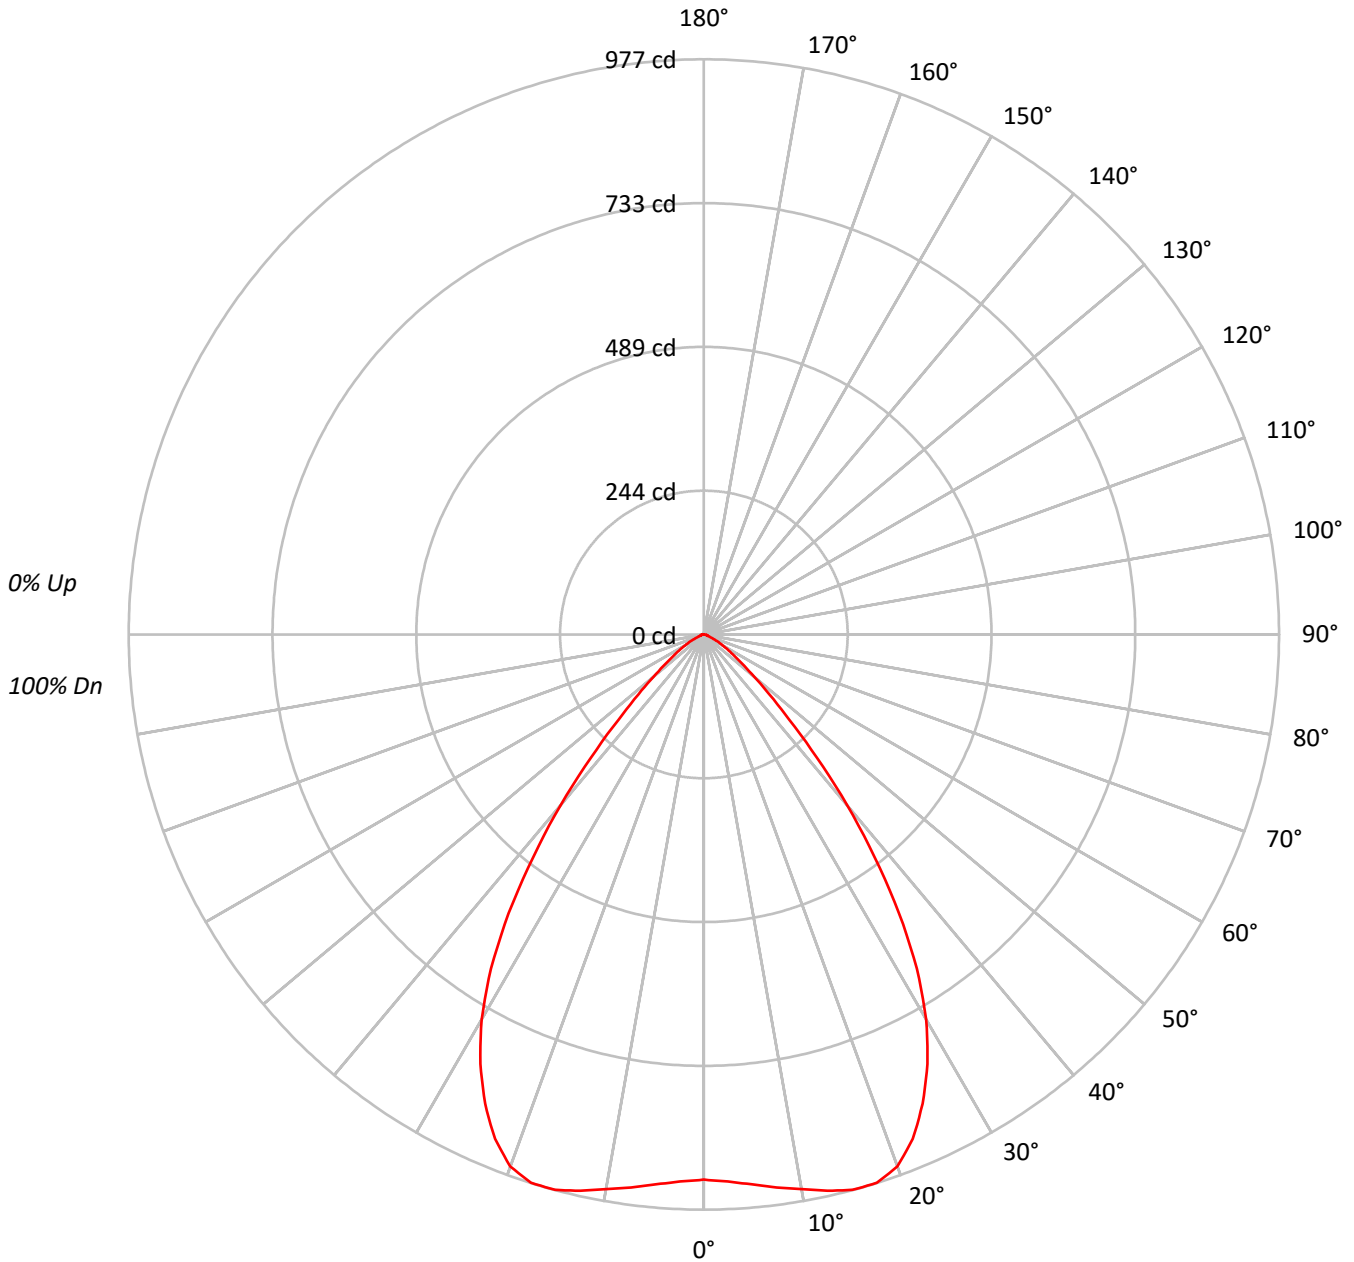



TEST NUMBER: P643046

CATALOG NUMBER: ML5615LSVWFL759FS1E - 591WB - 1200LM - 2700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	110	107	104	110	107	105	103	103	101	99	99	98	96	96	95	94	92			
2	106	101	96	92	104	99	95	91	95	92	89	92	90	87	90	87	85	83			
3	100	92	87	82	98	91	86	81	88	84	80	86	82	79	83	80	78	76			
4	94	85	79	74	92	84	78	73	82	77	73	80	75	72	78	74	71	69			
5	88	79	72	67	86	78	71	67	76	70	66	74	69	65	72	68	65	63			
6	83	73	66	61	81	72	65	61	70	65	60	69	64	60	67	63	60	58			
7	78	68	61	56	77	67	60	56	65	60	55	64	59	55	63	58	55	53			
8	74	63	56	51	72	62	56	51	61	55	51	60	55	51	59	54	51	49			
9	69	59	52	48	68	58	52	47	57	51	47	56	51	47	55	50	47	45			
10	66	55	48	44	65	54	48	44	54	48	44	53	47	44	52	47	44	42			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	50763
5°	51585
10°	53239
15°	55426
20°	56087
25°	53180
30°	47805
35°	38688
40°	27065
45°	15885
50°	9492
55°	5926
60°	4024
65°	2296
70°	1218
75°	1080
80°	1200
85°	1572

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 15885 cd/sqm



TEST NUMBER: P643046

CATALOG NUMBER: ML5615LSVWFL759FS1E - 591WB - 1200LM - 2700K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	90.1	6.5
10°-20°	275.1	20.0
20°-30°	400.7	29.1
30°-40°	355.5	25.8
40°-50°	168.2	12.2
50°-60°	58.8	4.3
60°-70°	19.1	1.4
70°-80°	5.9	0.4
80°-90°	2.6	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	765.9	55.7
0°-40°	1121.4	81.5
0°-60°	1348.5	98.0
0°-90°	1376.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1376.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	926	
5°	937	90
15°	977	275
25°	879	401
35°	578	355
45°	205	168
55°	62	59
65°	18	19
75°	5	6
85°	2	3
90°	0	



TEST NUMBER: P643046

CATALOG NUMBER: ML5615LSVWFL759FS1E - 591WB - 1200LM - 2700K

CANDELA DISTRIBUTION (FULL):

0°	
0°	926.0
2.5°	929.8
5°	937.4
7.5°	947.5
10°	956.4
12.5°	967.8
15°	976.6
17.5°	976.6
20°	961.4
22.5°	927.3
25°	879.2
27.5°	822.3
30°	755.2
32.5°	673.0
35°	578.1
37.5°	475.7
40°	378.2
42.5°	283.4
45°	204.9
47.5°	150.5
50°	111.3
52.5°	81.0
55°	62.0
57.5°	48.1
60°	36.7
62.5°	26.6
65°	17.7
67.5°	11.4
70°	7.6
72.5°	6.3
75°	5.1
77.5°	5.1
80°	3.8
82.5°	3.8
85°	2.5
87.5°	1.3
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)