

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P643052

Luminaire Tested: ML5615LSVWFL759FS1E - 591WB - 1500LM - 3000K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P643052
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-70)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5615LSVWFL759FS1E - 591WB - 1500LM - 3000K
Description: ML56 RR, 75D TIR OPTIC, 5" DEADFRONT TRIM
Light Source: (1) STANDARD SELECTABLE LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1740.1 lumens
Efficiency: N/A
Efficacy: 101.8 lumens/watt
Spacing Criteria (0/90/45): 1.19 / 1.19 / 1.09
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct


Input Watts (W): 17.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P643052

CATALOG NUMBER: ML5615LSVWFL759FS1E - 591WB - 1500LM - 3000K

Luminous Intensity Polar Plot

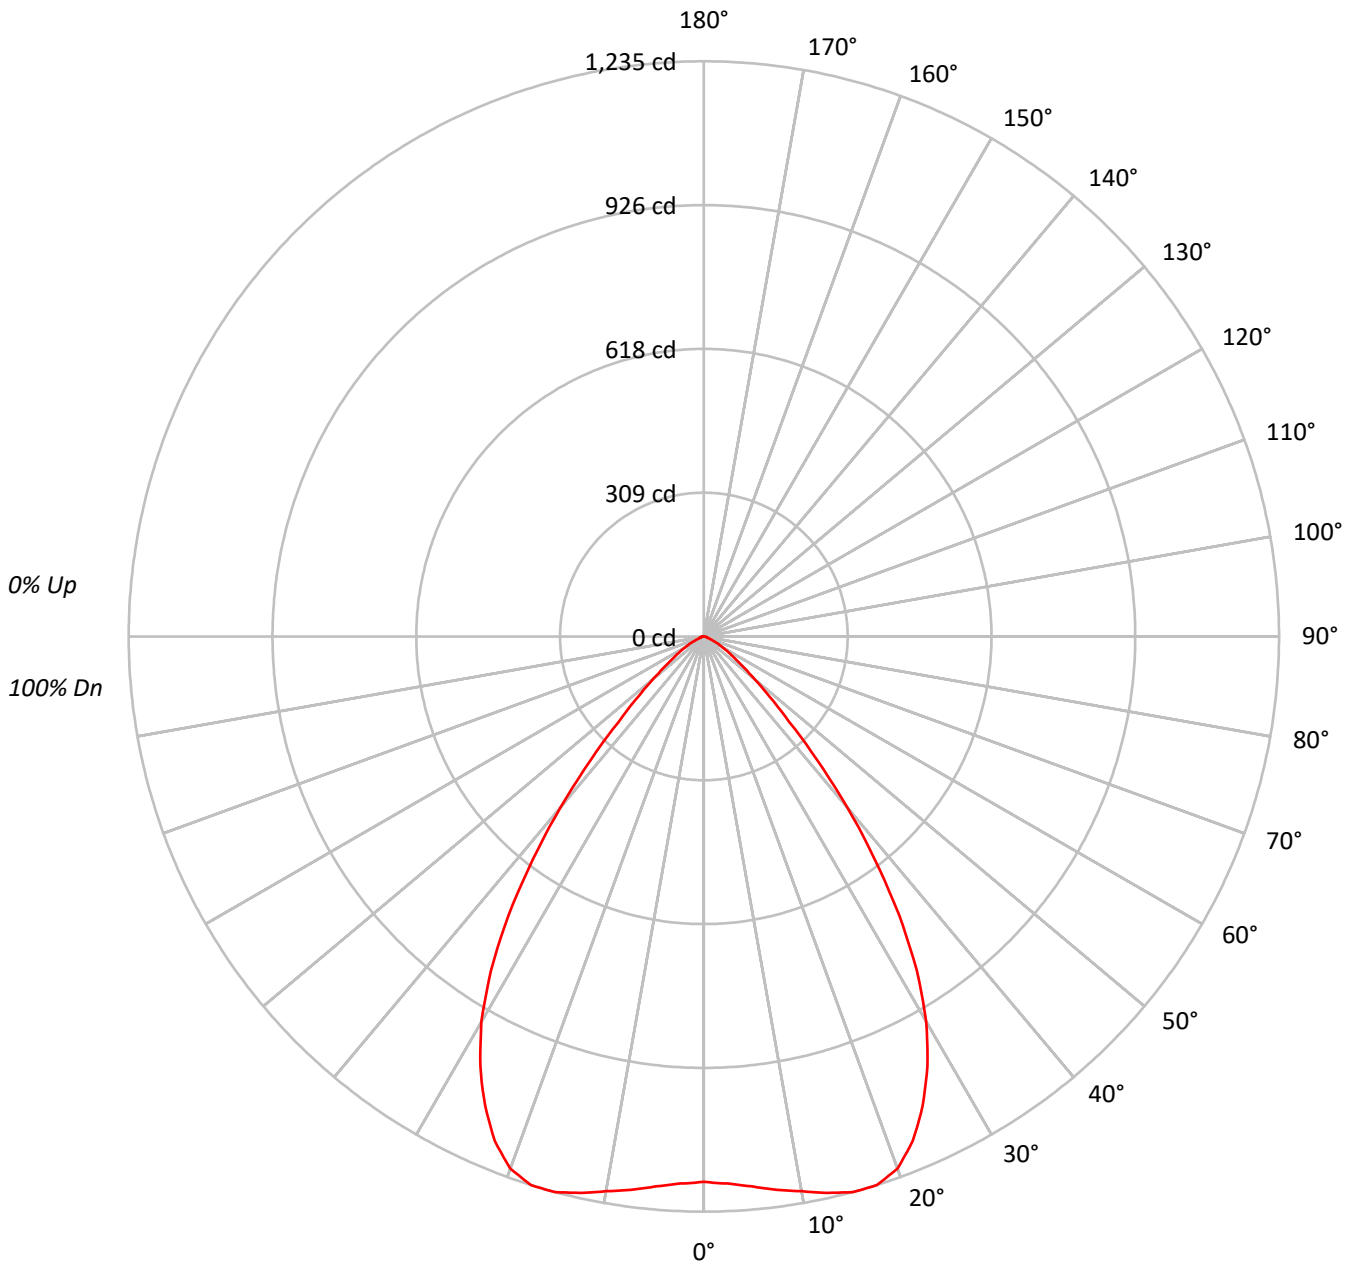



TEST NUMBER: P643052

CATALOG NUMBER: ML5615LSVWFL759FS1E - 591WB - 1500LM - 3000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	110	107	104	110	107	105	103	103	101	99	99	98	96	96	95	94	92																			
2	106	101	96	92	104	99	95	91	95	92	89	92	90	87	90	87	85	83																			
3	100	92	87	82	98	91	86	81	88	84	80	86	82	79	83	80	78	76																			
4	94	85	79	74	92	84	78	73	82	77	73	80	75	72	78	74	71	69																			
5	88	79	72	67	86	78	71	67	76	70	66	74	69	65	72	68	65	63																			
6	83	73	66	61	81	72	65	61	70	65	60	69	64	60	67	63	60	58																			
7	78	68	61	56	77	67	60	56	65	60	55	64	59	55	63	58	55	53																			
8	74	63	56	51	72	62	56	51	61	55	51	60	55	51	59	54	51	49																			
9	69	59	52	48	68	58	52	47	57	51	47	56	51	47	55	50	47	45																			
10	66	55	48	44	65	54	48	44	54	48	44	53	47	44	52	47	44	42																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	64194
5°	65232
10°	67322
15°	70091
20°	70928
25°	67250
30°	60452
35°	48927
40°	34228
45°	20095
50°	12008
55°	7493
60°	5087
65°	2906
70°	1539
75°	1356
80°	1515
85°	2013

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 20095 cd/sqm



TEST NUMBER: P643052

CATALOG NUMBER: ML5615LSVWFL759FS1E - 591WB - 1500LM - 3000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	114.0	6.5
10°-20°	347.9	20.0
20°-30°	506.7	29.1
30°-40°	449.5	25.8
40°-50°	212.8	12.2
50°-60°	74.4	4.3
60°-70°	24.2	1.4
70°-80°	7.4	0.4
80°-90°	3.3	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	968.5	55.7
0°-40°	1418.1	81.5
0°-60°	1705.3	98.0
0°-90°	1740.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1740.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1171	
5°	1185	114
15°	1235	348
25°	1112	507
35°	731	450
45°	259	213
55°	78	74
65°	22	24
75°	6	7
85°	3	3
90°	0	



TEST NUMBER: P643052

CATALOG NUMBER: ML5615LSVWFL759FS1E - 591WB - 1500LM - 3000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	1171.0
2.5°	1175.8
5°	1185.4
7.5°	1198.2
10°	1209.4
12.5°	1223.8
15°	1235.0
17.5°	1235.0
20°	1215.8
22.5°	1172.6
25°	1111.8
27.5°	1039.8
30°	955.0
32.5°	851.0
35°	731.1
37.5°	601.5
40°	478.3
42.5°	358.3
45°	259.2
47.5°	190.4
50°	140.8
52.5°	102.4
55°	78.4
57.5°	60.8
60°	46.4
62.5°	33.6
65°	22.4
67.5°	14.4
70°	9.6
72.5°	8.0
75°	6.4
77.5°	6.4
80°	4.8
82.5°	4.8
85°	3.2
87.5°	1.6
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)