

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P643063

Luminaire Tested: ML5615LSVWFL759FS1E - 592H - 1200LM - 3500K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P643063
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-72)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5615LSVWFL759FS1E - 592H - 1200LM - 3500K
Description: ML56 RR, 75D TIR OPTIC, 5" HAZE TRIM
Light Source: (1) STANDARD SELECTABLE LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1443.2 lumens
Efficiency: N/A
Efficacy: 107.7 lumens/watt
Spacing Criteria (0/90/45): 1.16 / 1.16 / 1.07
Luminous Opening: Circular (Dia: 0.42' x H: 0')
CIE Type: Direct


Input Watts (W): 13.4
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P643063

CATALOG NUMBER: ML5615LSVWFL759FS1E - 592H - 1200LM - 3500K

Luminous Intensity Polar Plot

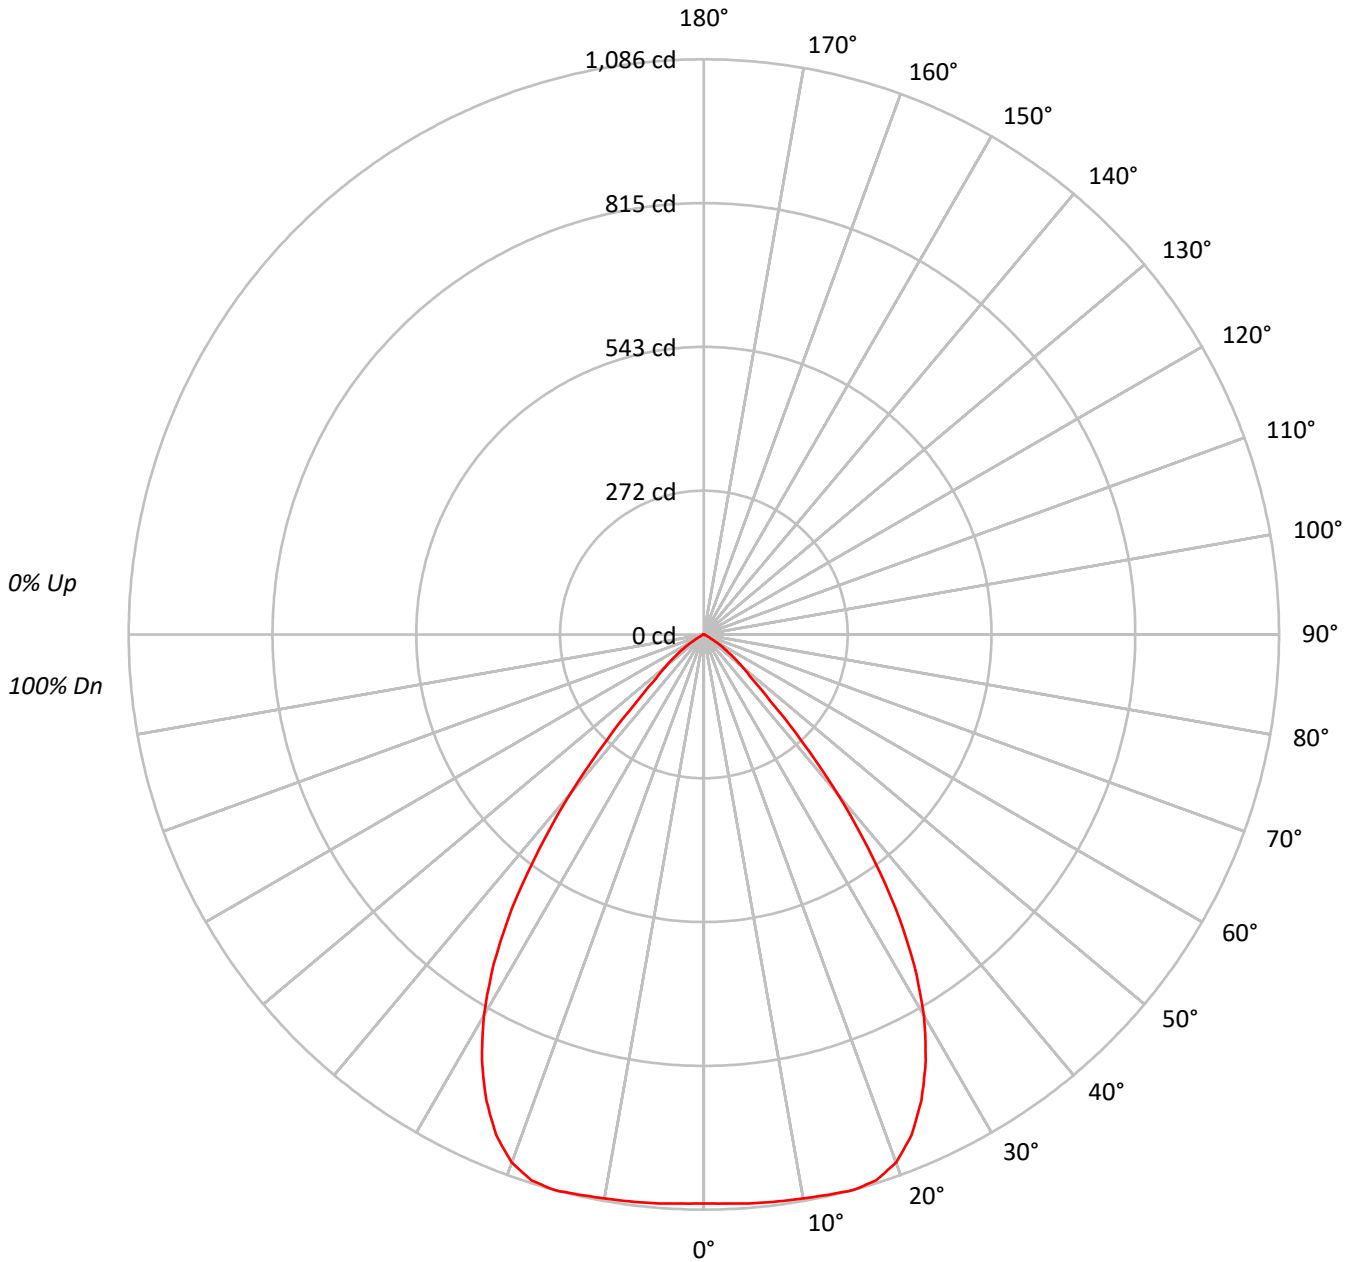



TEST NUMBER: P643063

CATALOG NUMBER: ML5615LSVWFL759FS1E - 592H - 1200LM - 3500K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	107	105	111	108	105	103	104	102	100	100	99	97	97	95	94	93	93	93	93
2	107	101	97	93	105	100	96	92	96	93	90	93	91	88	91	88	87	85	85	85	85
3	101	94	88	84	99	92	87	83	90	85	82	87	84	81	85	82	79	78	78	78	78
4	95	87	81	76	93	85	80	75	83	78	75	81	77	74	79	76	73	71	71	71	71
5	89	80	74	69	88	79	73	69	77	72	68	76	71	68	74	70	67	65	65	65	65
6	84	74	68	63	83	74	67	63	72	67	63	71	66	62	69	65	62	60	60	60	60
7	79	69	63	58	78	69	62	58	67	62	58	66	61	57	65	60	57	55	55	55	55
8	75	65	58	54	74	64	58	53	63	57	53	62	57	53	61	56	53	51	51	51	51
9	71	60	54	50	70	60	54	50	59	53	49	58	53	49	57	52	49	48	48	48	48
10	67	57	50	46	66	56	50	46	55	50	46	55	49	46	54	49	46	44	44	44	44

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	84798
5°	85439
10°	86644
15°	88779
20°	89123
25°	84611
30°	75757
35°	60905
40°	40344
45°	19838
50°	11655
55°	6799
60°	2321
65°	504
70°	300
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 19838 cd/sqm



TEST NUMBER: P643063

CATALOG NUMBER: ML5615LSVWFL759FS1E - 592H - 1200LM - 3500K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	103.0	7.1
10°-20°	306.1	21.2
20°-30°	442.2	30.6
30°-40°	386.0	26.7
40°-50°	155.1	10.7
50°-60°	45.5	3.2
60°-70°	4.9	0.3
70°-80°	0.5	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	851.2	59.0
0°-40°	1237.2	85.7
0°-60°	1437.8	99.6
0°-90°	1443.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1443.2	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1074	
5°	1078	103
15°	1086	306
25°	971	442
35°	632	386
45°	178	155
55°	49	45
65°	3	5
75°	0	1
85°	0	0
90°	0	



TEST NUMBER: P643063

CATALOG NUMBER: ML5615LSVWFL759FS1E - 592H - 1200LM - 3500K

CANDELA DISTRIBUTION (FULL):

0°	
0°	1074.2
2.5°	1075.6
5°	1078.2
7.5°	1079.6
10°	1080.9
12.5°	1083.6
15°	1086.3
17.5°	1080.9
20°	1060.9
22.5°	1023.5
25°	971.4
27.5°	907.2
30°	831.1
32.5°	738.9
35°	632.0
37.5°	510.4
40°	391.5
42.5°	275.2
45°	177.7
47.5°	121.6
50°	94.9
52.5°	69.5
55°	49.4
57.5°	32.1
60°	14.7
62.5°	8.0
65°	2.7
67.5°	1.3
70°	1.3
72.5°	1.3
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)