

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P643081

Luminaire Tested: ML5615LSVWFL759FS1E - 592SC - 1500LM - 2700K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P643081
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-71)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5615LSVWFL759FS1E - 592SC - 1500LM - 2700K
Description: ML56 RR, 75D TIR OPTIC, 5" SPECULAR CLEAR TRIM
Light Source: (1) STANDARD SELECTABLE LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1688.7 lumens
Efficiency: N/A
Efficacy: 98.8 lumens/watt
Spacing Criteria (0/90/45): 1.15 / 1.15 / 1.07
Luminous Opening: Circular (Dia: 0.42' x H: 0')
CIE Type: Direct


Input Watts (W): 17.1
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P643081

CATALOG NUMBER: ML5615LSVWFL759FS1E - 592SC - 1500LM - 2700K

Luminous Intensity Polar Plot

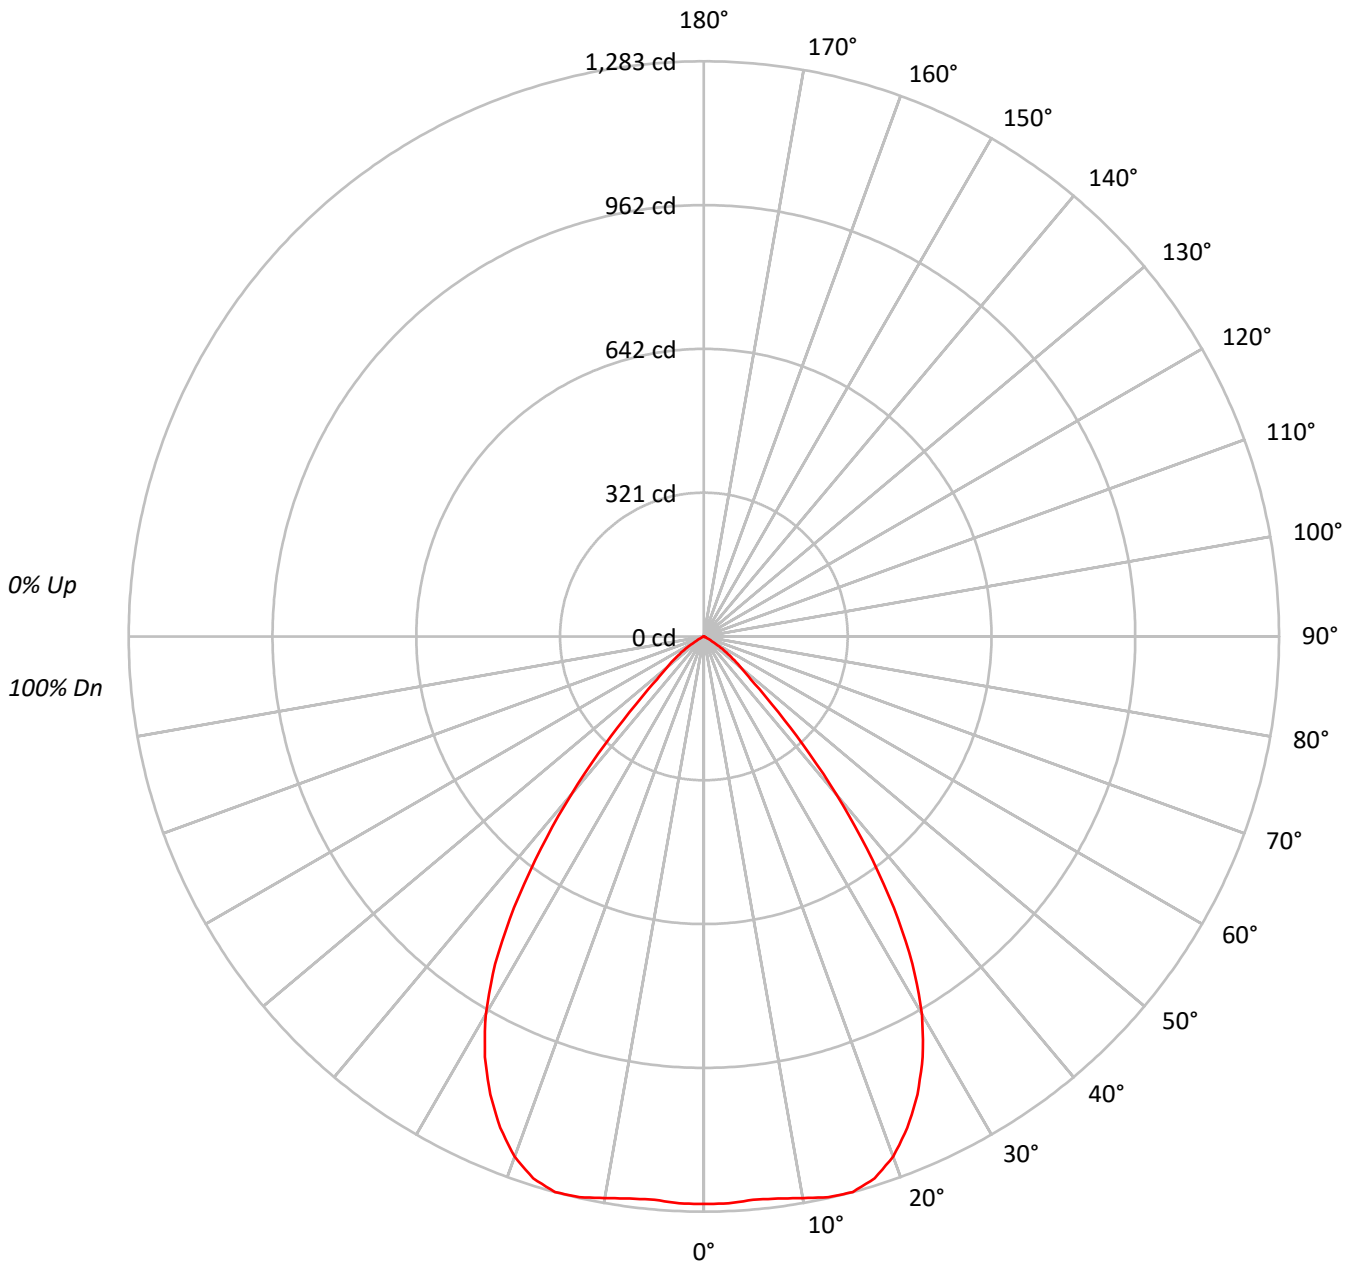



TEST NUMBER: P643081

CATALOG NUMBER: ML5615LSVWFL759FS1E - 592SC - 1500LM - 2700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	107	105	111	108	106	103	104	102	100	100	99	97	97	95	94	93	93	93	93
2	107	102	97	93	105	100	96	92	96	93	90	93	91	88	91	89	87	85	85	85	85
3	101	94	88	84	99	92	87	83	90	85	82	87	84	81	85	82	79	78	78	78	78
4	95	87	81	76	93	85	80	75	83	78	75	81	77	74	79	76	73	71	71	71	71
5	89	80	74	69	88	79	73	69	77	72	68	76	71	68	74	70	67	65	65	65	65
6	84	75	68	63	83	74	68	63	72	67	63	71	66	62	69	65	62	60	60	60	60
7	80	69	63	58	78	69	62	58	67	62	58	66	61	57	65	60	57	55	55	55	55
8	75	65	58	54	74	64	58	54	63	57	53	62	57	53	61	56	53	51	51	51	51
9	71	60	54	50	70	60	54	50	59	53	49	58	53	49	57	52	49	48	48	48	48
10	67	57	50	46	66	56	50	46	55	50	46	55	49	46	54	49	46	44	44	44	44

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	99916
5°	99925
10°	101954
15°	104838
20°	103715
25°	98190
30°	88728
35°	71178
40°	47424
45°	23958
50°	13362
55°	7914
60°	2952
65°	579
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 23958 cd/sqm



TEST NUMBER: P643081

CATALOG NUMBER: ML5615LSVWFL759FS1E - 592SC - 1500LM - 2700K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	120.8	7.2
10°-20°	359.8	21.3
20°-30°	514.3	30.5
30°-40°	452.0	26.8
40°-50°	183.2	10.8
50°-60°	52.9	3.1
60°-70°	5.7	0.3
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	994.9	58.9
0°-40°	1446.9	85.7
0°-60°	1683.0	99.7
0°-90°	1688.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1688.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1266	
5°	1261	121
15°	1283	360
25°	1127	514
35°	739	452
45°	215	183
55°	58	53
65°	3	6
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P643081

CATALOG NUMBER: ML5615LSVWFL759FS1E - 592SC - 1500LM - 2700K

CANDELA DISTRIBUTION (FULL):

	0°
0°	1265.7
2.5°	1265.7
5°	1261.0
7.5°	1264.1
10°	1271.9
12.5°	1281.2
15°	1282.8
17.5°	1267.2
20°	1234.6
22.5°	1186.4
25°	1127.3
27.5°	1057.3
30°	973.4
32.5°	866.1
35°	738.6
37.5°	597.1
40°	460.2
42.5°	325.0
45°	214.6
47.5°	141.5
50°	108.8
52.5°	80.9
55°	57.5
57.5°	37.3
60°	18.7
62.5°	9.3
65°	3.1
67.5°	1.6
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)