

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P643103

Luminaire Tested: ML5615LSVWFL759FS1E - 592W - 900LM - 3500K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P643103
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-73)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5615LSVWFL759FS1E - 592W - 900LM - 3500K
Description: ML56 RR, 75D TIR OPTIC, 5" WHITE TRIM
Light Source: (1) STANDARD SELECTABLE LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1139.0 lumens
Efficiency: N/A
Efficacy: 108.5 lumens/watt
Spacing Criteria (0/90/45): 1.19 / 1.19 / 1.09
Luminous Opening: Circular (Dia: 0.42' x H: 0')
CIE Type: Direct

Input Watts (W): 10.5
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P643103
CATALOG NUMBER: ML5615LSVWFL759FS1E - 592W - 900LM - 3500K

Luminous Intensity Polar Plot

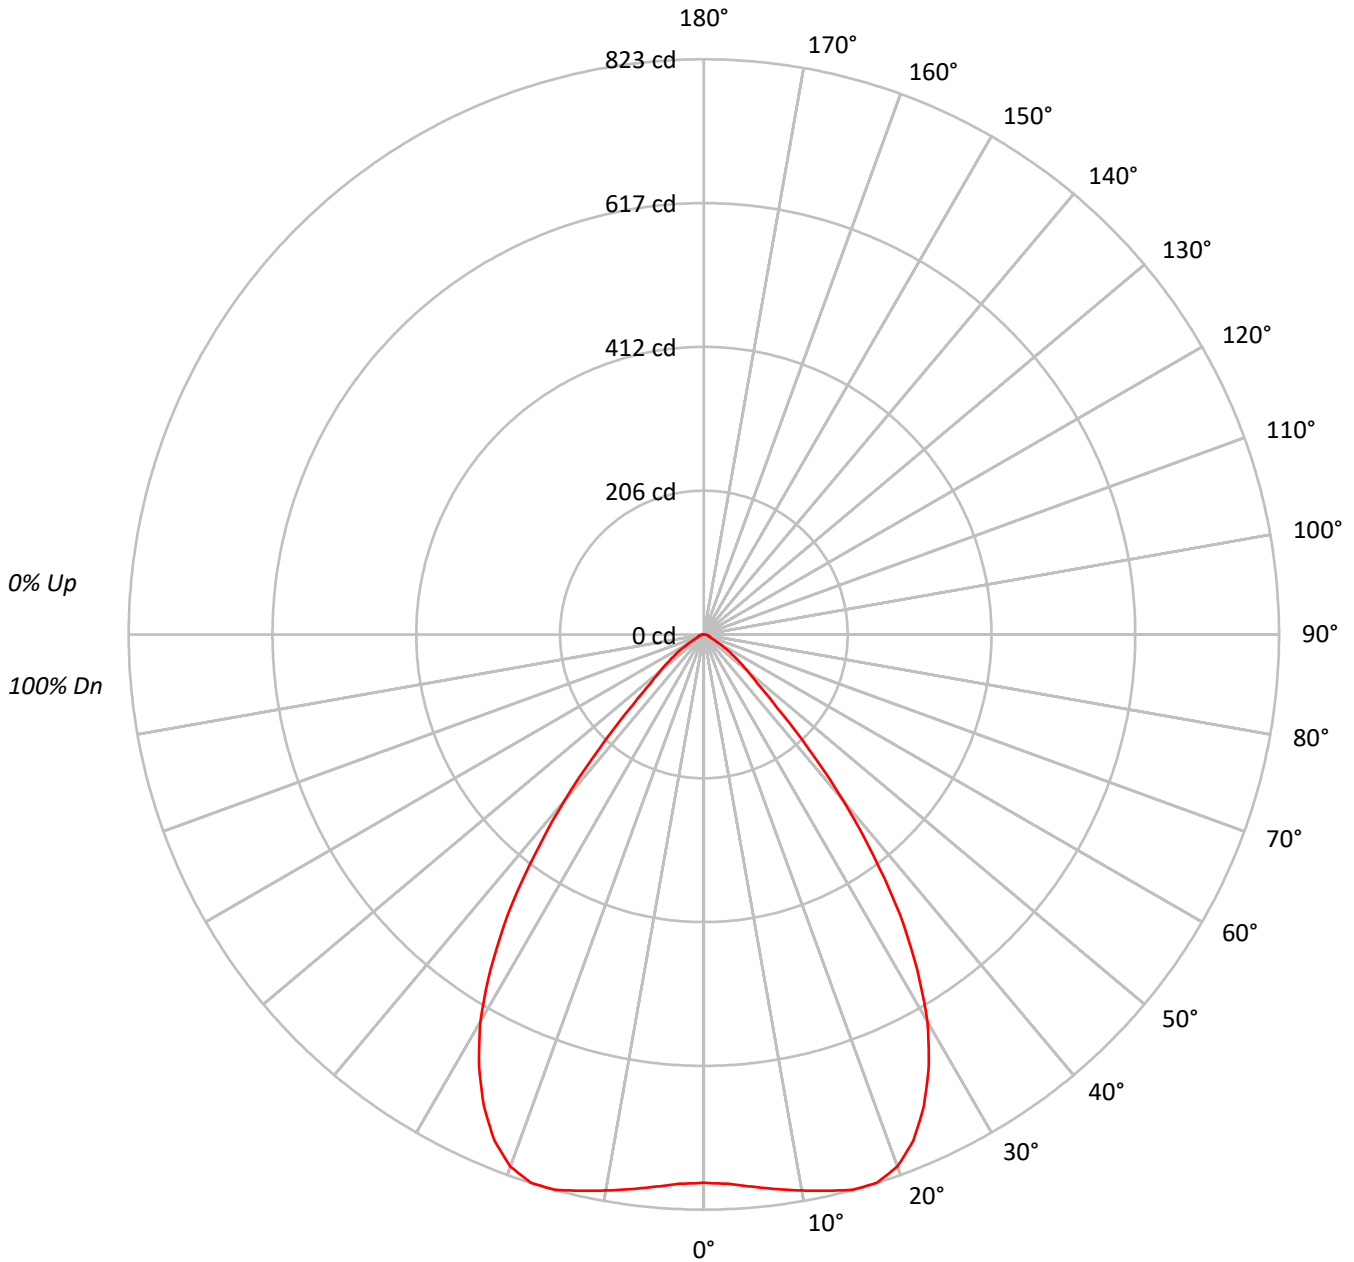



TEST NUMBER: P643103

CATALOG NUMBER: ML5615LSVWFL759FS1E - 592W - 900LM - 3500K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	107	104	110	107	105	103	103	101	99	100	98	96	96	95	94	92	92	92	92
2	106	101	96	92	104	99	95	91	96	92	89	93	90	87	90	87	85	84	84	84	84
3	100	93	87	83	98	91	86	82	89	84	81	86	82	79	84	81	78	76	76	76	76
4	94	85	79	74	92	84	78	74	82	77	73	80	76	72	78	74	71	70	70	70	70
5	88	79	72	68	87	78	72	67	76	71	67	74	70	66	73	69	65	64	64	64	64
6	83	73	66	62	82	72	66	61	71	65	61	69	64	61	68	64	60	58	58	58	58
7	78	68	61	57	77	67	61	56	66	60	56	65	60	56	64	59	55	54	54	54	54
8	74	63	57	52	73	63	56	52	62	56	52	61	55	51	59	55	51	50	50	50	50
9	70	59	53	48	69	59	52	48	58	52	48	57	51	48	56	51	48	46	46	46	46
10	66	55	49	45	65	55	49	45	54	48	44	53	48	44	52	48	44	43	43	43	43

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	61937
5°	62839
10°	64752
15°	67228
20°	68037
25°	64847
30°	58329
35°	47115
40°	31997
45°	16623
50°	10120
55°	6689
60°	3505
65°	1980
70°	1939
75°	1922
80°	1909
85°	1902

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 16623 cd/sqm



TEST NUMBER: P643103

CATALOG NUMBER: ML5615LSVWFL759FS1E - 592W - 900LM - 3500K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	76.2	6.7
10°-20°	231.8	20.4
20°-30°	339.0	29.8
30°-40°	299.1	26.3
40°-50°	127.2	11.2
50°-60°	44.1	3.9
60°-70°	12.6	1.1
70°-80°	6.7	0.6
80°-90°	2.3	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	647.0	56.8
0°-40°	946.0	83.1
0°-60°	1117.4	98.1
0°-90°	1139.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1139.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	785	
5°	793	76
15°	823	232
25°	744	339
35°	489	299
45°	149	127
55°	49	44
65°	11	13
75°	6	7
85°	2	2
90°	0	



TEST NUMBER: P643103

CATALOG NUMBER: ML5615LSVWFL759FS1E - 592W - 900LM - 3500K

CANDELA DISTRIBUTION (FULL):

0°	
0°	784.6
2.5°	786.7
5°	793.0
7.5°	800.4
10°	807.8
12.5°	815.2
15°	822.6
17.5°	822.6
20°	809.9
22.5°	783.5
25°	744.5
27.5°	696.9
30°	639.9
32.5°	568.1
35°	488.9
37.5°	398.1
40°	310.5
42.5°	220.7
45°	148.9
47.5°	103.5
50°	82.4
52.5°	63.4
55°	48.6
57.5°	34.8
60°	22.2
62.5°	15.8
65°	10.6
67.5°	9.5
70°	8.4
72.5°	7.4
75°	6.3
77.5°	5.3
80°	4.2
82.5°	3.2
85°	2.1
87.5°	1.1
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)