

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P643151

Luminaire Tested: ML5615LSVWFL759FS1E - 593WB - 1200LM - 2700K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P643151
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-74)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5615LSVWFL759FS1E - 593WB - 1200LM - 2700K
Description: ML56 RR, 75D TIR OPTIC, 5" WHITE BAFFLE TRIM
Light Source: (1) STANDARD SELECTABLE LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1360.9 lumens
Efficiency: N/A
Efficacy: 101.6 lumens/watt
Spacing Criteria (0/90/45): 1.19 / 1.19 / 1.09
Luminous Opening: Circular (Dia: 0.42' x H: 0')
CIE Type: Direct

Input Watts (W): 13.4
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P643151
CATALOG NUMBER: ML5615LSVWFL759FS1E - 593WB - 1200LM - 2700K

Luminous Intensity Polar Plot

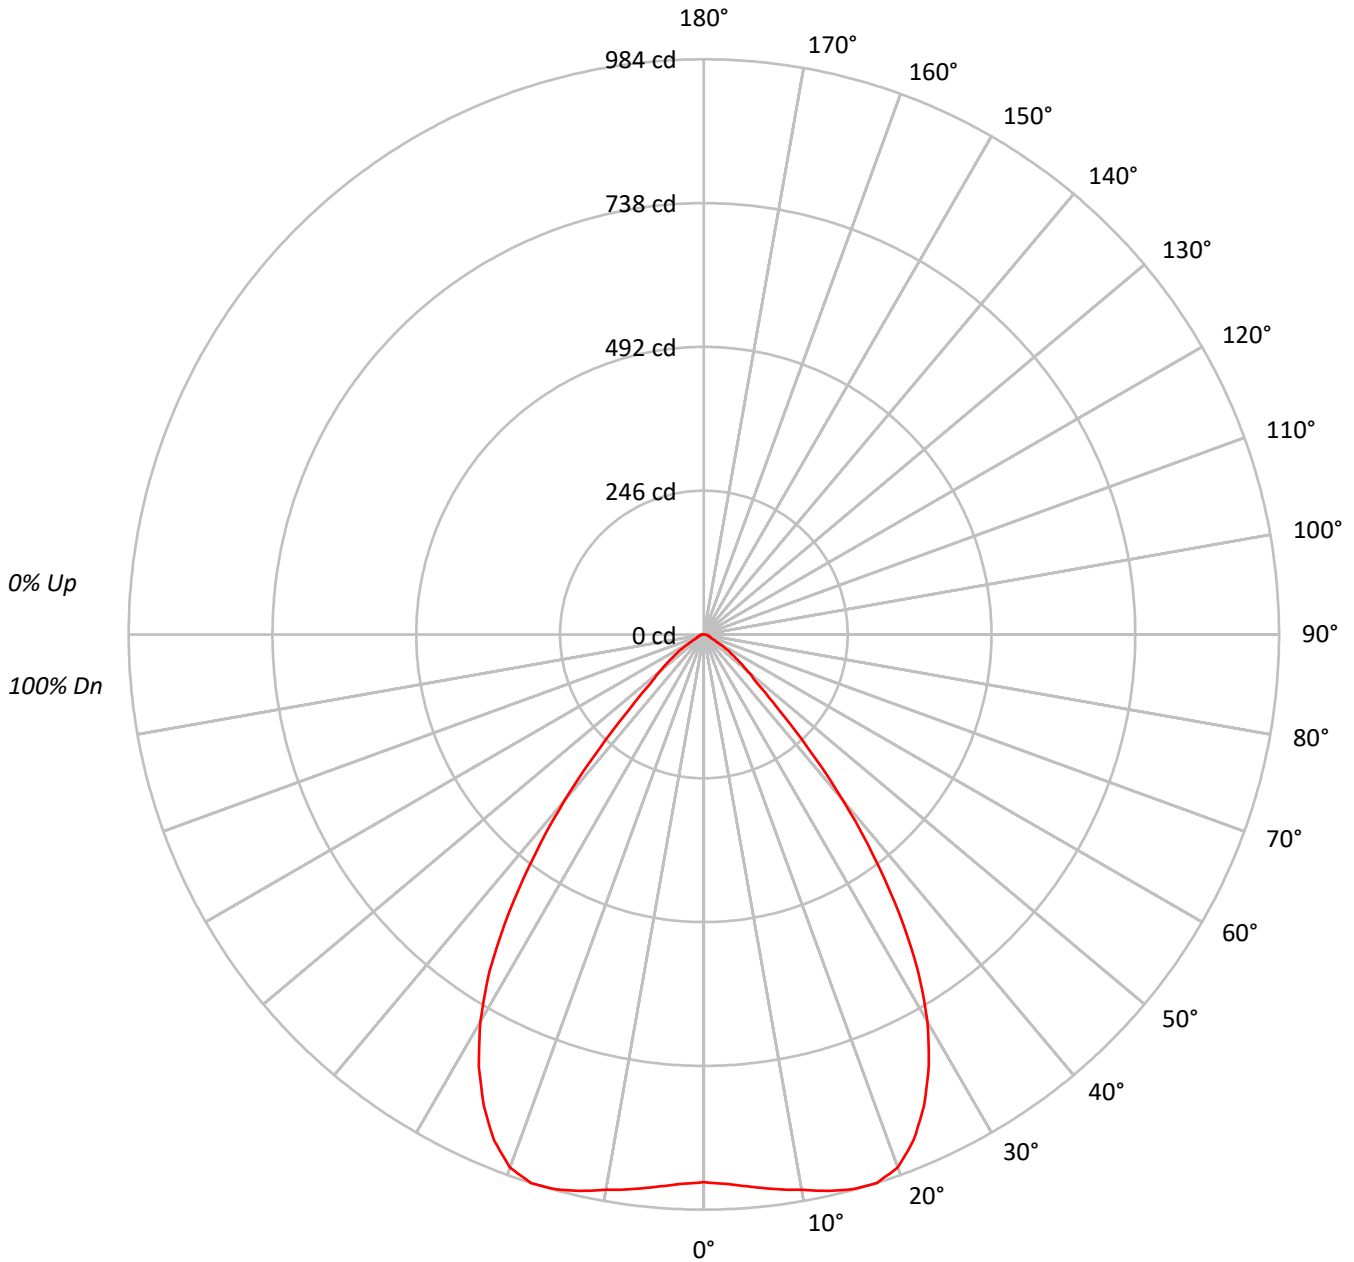



TEST NUMBER: P643151

CATALOG NUMBER: ML5615LSVWFL759FS1E - 593WB - 1200LM - 2700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10		0	
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	113	110	107	104	110	107	105	103	103	101	99		100	98	96		96	95	94	92
2	106	101	96	92	104	99	95	91	96	92	89		93	90	87		90	88	85	84
3	100	93	87	83	98	91	86	82	89	84	81		86	82	79		84	81	78	76
4	94	85	79	74	92	84	78	74	82	77	73		80	76	72		78	74	71	70
5	88	79	72	68	87	78	72	67	76	71	67		74	70	66		73	69	65	64
6	83	73	66	62	82	72	66	61	71	65	61		69	64	61		68	64	60	59
7	78	68	61	57	77	67	61	56	66	60	56		65	60	56		64	59	55	54
8	74	63	57	52	73	63	56	52	62	56	52		61	55	51		60	55	51	50
9	70	59	53	48	69	59	52	48	58	52	48		57	51	48		56	51	48	46
10	66	55	49	45	65	55	49	45	54	48	44		53	48	44		52	48	44	43

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	73976
5°	75161
10°	77345
15°	80304
20°	81487
25°	77547
30°	69741
35°	56183
40°	38180
45°	19760
50°	12109
55°	8010
60°	3994
65°	2354
70°	2331
75°	2318
80°	2318
85°	2264

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 19760 cd/sqm



TEST NUMBER: P643151

CATALOG NUMBER: ML5615LSVWFL759FS1E - 593WB - 1200LM - 2700K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	91.1	6.7
10°-20°	277.2	20.4
20°-30°	405.5	29.8
30°-40°	357.5	26.3
40°-50°	151.4	11.1
50°-60°	52.7	3.9
60°-70°	14.6	1.1
70°-80°	8.0	0.6
80°-90°	2.8	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	773.7	56.9
0°-40°	1131.3	83.1
0°-60°	1335.4	98.1
0°-90°	1360.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1360.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	937	
5°	948	91
15°	983	277
25°	890	406
35°	583	358
45°	177	151
55°	58	53
65°	13	15
75°	8	8
85°	2	3
90°	0	



TEST NUMBER: P643151

CATALOG NUMBER: ML5615LSVWFL759FS1E - 593WB - 1200LM - 2700K

CANDELA DISTRIBUTION (FULL):

	0°
0°	937.1
2.5°	940.9
5°	948.5
7.5°	957.3
10°	964.9
12.5°	975.0
15°	982.6
17.5°	983.9
20°	970.0
22.5°	937.1
25°	890.3
27.5°	833.4
30°	765.1
32.5°	681.6
35°	583.0
37.5°	475.5
40°	370.5
42.5°	263.0
45°	177.0
47.5°	122.7
50°	98.6
52.5°	75.9
55°	58.2
57.5°	41.7
60°	25.3
62.5°	17.7
65°	12.6
67.5°	11.4
70°	10.1
72.5°	8.9
75°	7.6
77.5°	6.3
80°	5.1
82.5°	3.8
85°	2.5
87.5°	1.3
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)