

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P643206

Luminaire Tested: ML5615LSVWFL759FS1E - 594WB - 900LM - 2700K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P643206
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-78)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5615LSVWFL759FS1E - 594WB - 900LM - 2700K
Description: ML56 RR, 75D TIR OPTIC, 5" WHITE GIMBAL TRIM
Light Source: (1) STANDARD SELECTABLE LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1100.0 lumens
Efficiency: N/A
Efficacy: 104.8 lumens/watt
Spacing Criteria (0/90/45): 1.19 / 1.19 / 1.09
Luminous Opening: Circular (Dia: 0.42' x H: 0')
CIE Type: Direct

Input Watts (W): 10.5
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P643206
CATALOG NUMBER: ML5615LSVWFL759FS1E - 594WB - 900LM - 2700K

Luminous Intensity Polar Plot

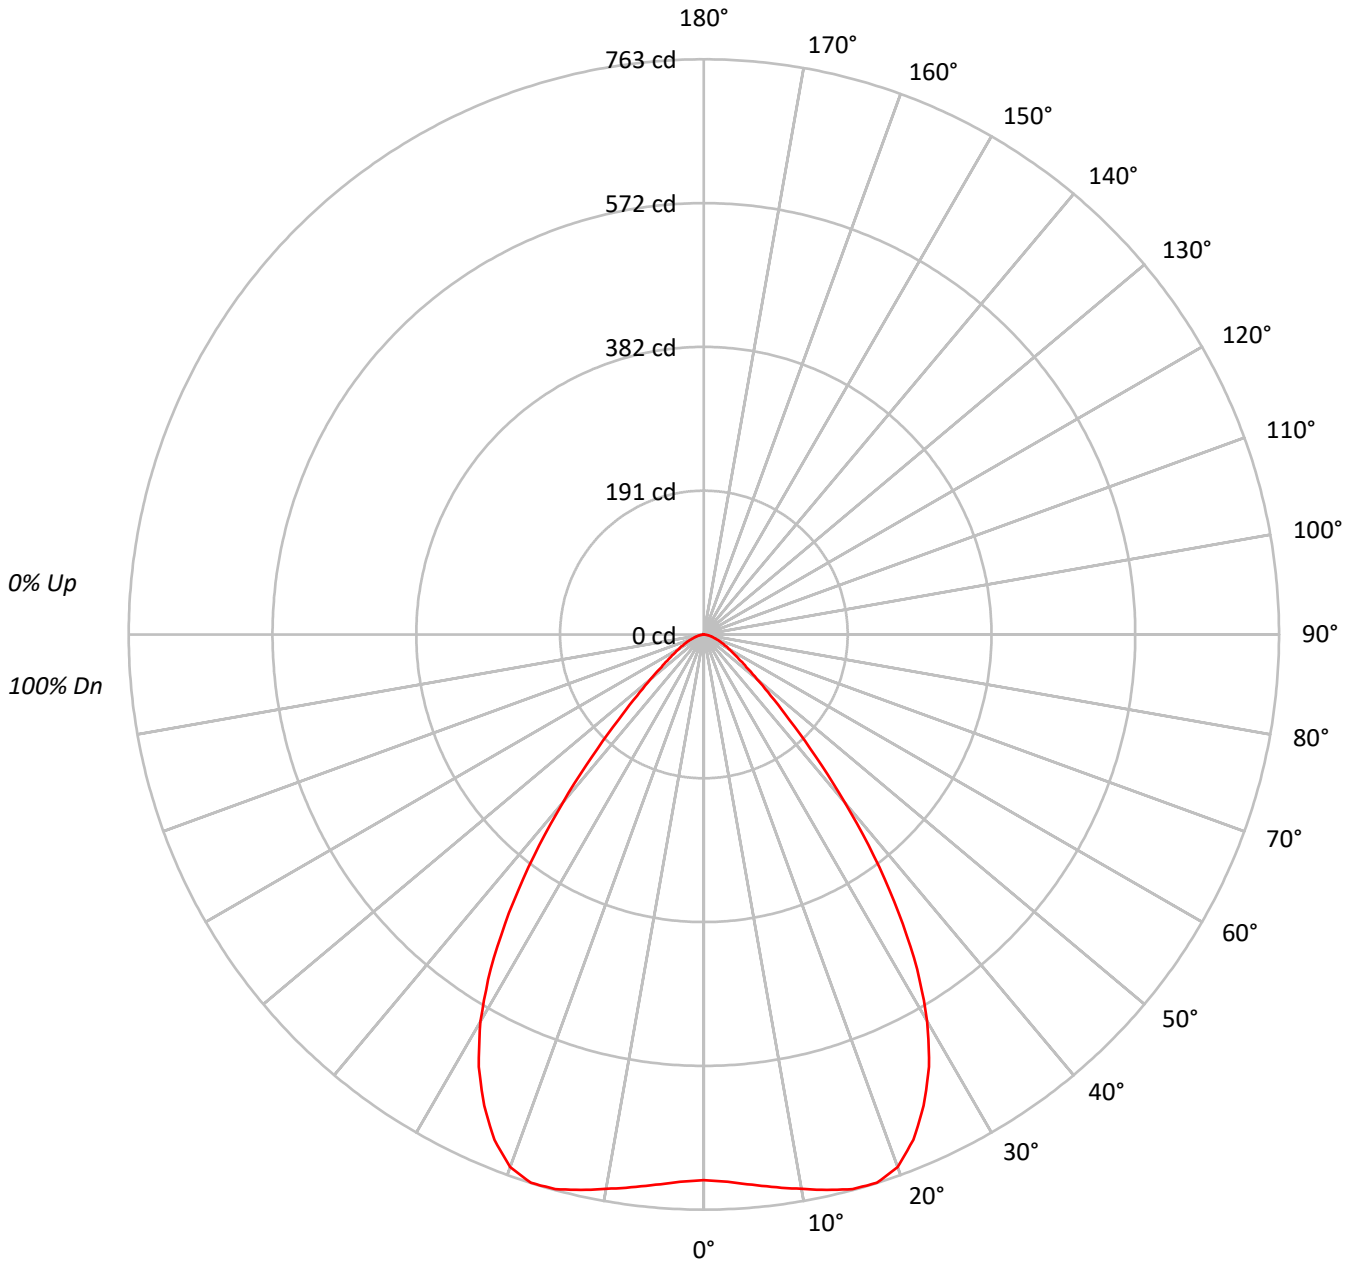



TEST NUMBER: P643206

CATALOG NUMBER: ML5615LSVWFL759FS1E - 594WB - 900LM - 2700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20					
RC	80					70					50					30					10					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0		
RCR																										
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100					100			
1	112	109	106	104	110	107	104	102	103	101	99	99	98	96	96	94	93	91					91			
2	106	100	95	91	103	98	94	90	95	91	88	92	89	86	89	87	84	83					83			
3	99	92	86	81	97	90	85	80	87	83	79	85	81	78	83	79	77	75					75			
4	93	84	78	73	91	83	77	72	81	76	71	79	74	71	77	73	70	68					68			
5	87	78	71	66	86	77	70	66	75	69	65	73	68	64	71	67	64	62					62			
6	82	72	65	60	81	71	64	60	69	64	59	68	63	59	67	62	58	57					57			
7	77	67	60	55	76	66	59	55	65	59	54	63	58	54	62	57	54	52					52			
8	73	62	55	50	72	61	55	50	60	54	50	59	54	50	58	53	50	48					48			
9	69	58	51	47	68	57	51	46	56	50	46	55	50	46	54	50	46	44					44			
10	65	54	48	43	64	54	47	43	53	47	43	52	47	43	51	46	43	41					41			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	57130
5°	58061
10°	59855
15°	62250
20°	63148
25°	60074
30°	54026
35°	43443
40°	29977
45°	17851
50°	11299
55°	7845
60°	6000
65°	4857
70°	3924
75°	3050
80°	1818
85°	906

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 17851 cd/sqm



TEST NUMBER: P643206

CATALOG NUMBER: ML5615LSVWFL759FS1E - 594WB - 900LM - 2700K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	70.4	6.4
10°-20°	214.7	19.5
20°-30°	314.3	28.6
30°-40°	277.4	25.2
40°-50°	131.5	12.0
50°-60°	53.2	4.8
60°-70°	26.5	2.4
70°-80°	10.7	1.0
80°-90°	1.4	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	599.4	54.5
0°-40°	876.8	79.7
0°-60°	1061.5	96.5
0°-90°	1100.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1100.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	724	
5°	733	70
15°	762	215
25°	690	314
35°	451	277
45°	160	132
55°	57	53
65°	26	27
75°	10	11
85°	1	1
90°	0	



TEST NUMBER: P643206

CATALOG NUMBER: ML5615LSVWFL759FS1E - 594WB - 900LM - 2700K

CANDELA DISTRIBUTION (FULL):

0°	
0°	723.7
2.5°	726.7
5°	732.7
7.5°	739.7
10°	746.7
12.5°	754.7
15°	761.7
17.5°	762.7
20°	751.7
22.5°	725.7
25°	689.7
27.5°	646.7
30°	592.7
32.5°	526.8
35°	450.8
37.5°	370.8
40°	290.9
42.5°	218.9
45°	159.9
47.5°	119.9
50°	92.0
52.5°	71.0
55°	57.0
57.5°	46.0
60°	38.0
62.5°	32.0
65°	26.0
67.5°	22.0
70°	17.0
72.5°	13.0
75°	10.0
77.5°	7.0
80°	4.0
82.5°	2.0
85°	1.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)