

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P643222

Luminaire Tested: ML5615LSVWFL759FS1E - 596WB - 900LM - 3000K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P643222
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-81)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5615LSVWFL759FS1E - 596WB - 900LM - 3000K
Description: ML56 RR, 75D TIR OPTIC, 5" SHALLOW WHITE BAFFLE TRIM
Light Source: (1) STANDARD SELECTABLE LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1126.3 lumens
Efficiency: N/A
Efficacy: 107.3 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.2 / 1.1
Luminous Opening: Circular (Dia: 0.42' x H: 0')
CIE Type: Direct

Input Watts (W): 10.5
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P643222
CATALOG NUMBER: ML5615LSVWFL759FS1E - 596WB - 900LM - 3000K

Luminous Intensity Polar Plot

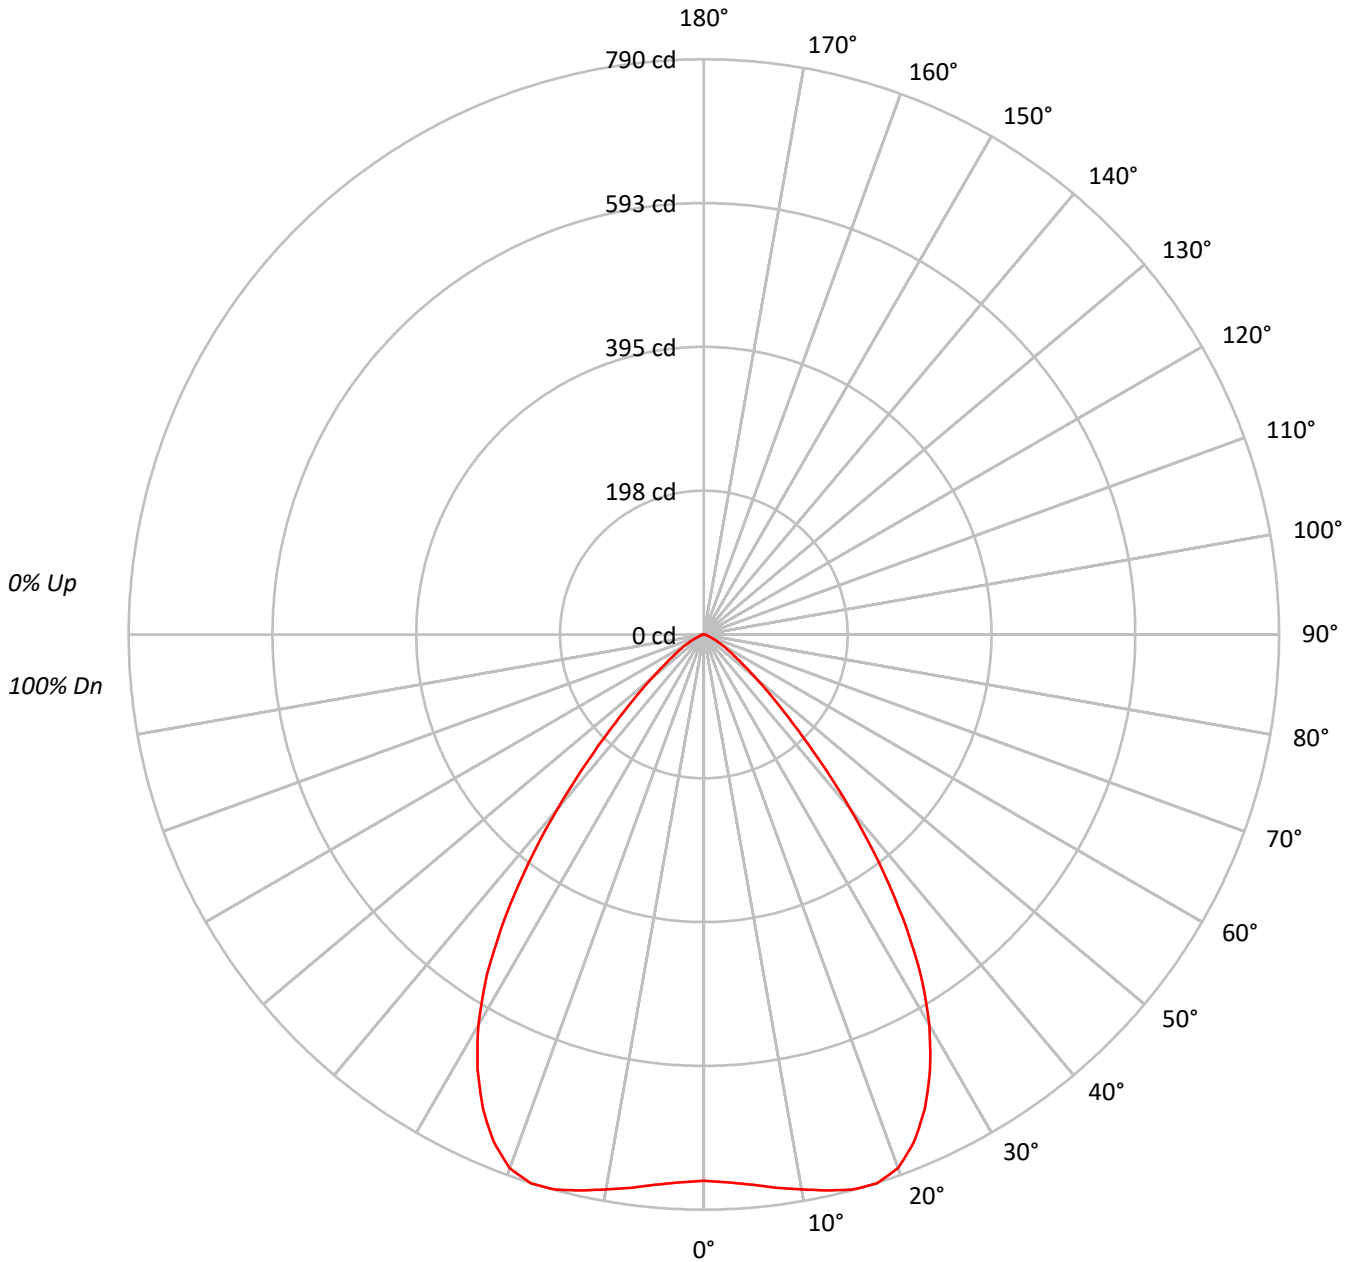



TEST NUMBER: P643222

CATALOG NUMBER: ML5615LSVWFL759FS1E - 596WB - 900LM - 3000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	113	110	107	104	110	107	105	103	103	101	99	100	98	96	96	95	94	92			92
2	106	101	96	92	104	99	95	91	95	92	89	92	90	87	90	87	85	83			83
3	100	92	87	82	98	91	86	81	88	84	80	86	82	79	83	80	78	76			76
4	94	85	79	74	92	84	78	73	82	77	73	80	75	72	78	74	71	69			69
5	88	78	72	67	86	77	71	67	76	70	66	74	69	65	72	68	65	63			63
6	83	73	66	61	81	72	65	61	70	65	60	69	64	60	67	63	59	58			58
7	78	67	61	56	76	67	60	56	65	60	55	64	59	55	63	58	55	53			53
8	73	63	56	51	72	62	56	51	61	55	51	60	55	51	59	54	50	49			49
9	69	59	52	47	68	58	52	47	57	51	47	56	51	47	55	50	47	45			45
10	66	55	48	44	65	54	48	44	53	48	44	53	47	44	52	47	43	42			42

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	59221
5°	60097
10°	62027
15°	64506
20°	65526
25°	62565
30°	56469
35°	46016
40°	32234
45°	19180
50°	11372
55°	6937
60°	4705
65°	2690
70°	1431
75°	1251
80°	1409
85°	906

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 19180 cd/sqm



TEST NUMBER: P643222

CATALOG NUMBER: ML5615LSVWFL759FS1E - 596WB - 900LM - 3000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	72.9	6.5
10°-20°	222.6	19.8
20°-30°	327.1	29.0
30°-40°	293.5	26.1
40°-50°	140.3	12.5
50°-60°	48.3	4.3
60°-70°	15.6	1.4
70°-80°	4.5	0.4
80°-90°	1.5	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	622.6	55.3
0°-40°	916.1	81.3
0°-60°	1104.7	98.1
0°-90°	1126.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1126.3	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	750	
5°	758	73
15°	789	223
25°	718	327
35°	478	294
45°	172	140
55°	50	48
65°	14	16
75°	4	4
85°	1	2
90°	0	



TEST NUMBER: P643222

CATALOG NUMBER: ML5615LSVWFL759FS1E - 596WB - 900LM - 3000K

CANDELA DISTRIBUTION (FULL):

	0°
0°	750.2
2.5°	753.2
5°	758.4
7.5°	766.6
10°	773.8
12.5°	782.1
15°	789.3
17.5°	790.3
20°	780.0
22.5°	754.3
25°	718.3
27.5°	673.0
30°	619.5
32.5°	554.6
35°	477.5
37.5°	395.1
40°	312.8
42.5°	235.6
45°	171.8
47.5°	126.6
50°	92.6
52.5°	66.9
55°	50.4
57.5°	39.1
60°	29.8
62.5°	21.6
65°	14.4
67.5°	9.3
70°	6.2
72.5°	5.1
75°	4.1
77.5°	3.1
80°	3.1
82.5°	2.1
85°	1.0
87.5°	1.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)