

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P643242

Luminaire Tested: ML5615LSVWFL759FS1E - 692H - 1200LM - 3000K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P643242
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-84)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5615LSVWFL759FS1E - 692H - 1200LM - 3000K
Description: ML56 RR, 75D TIR OPTIC, 6" HAZE TRIM
Light Source: (1) STANDARD SELECTABLE LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1411.4 lumens
Efficiency: N/A
Efficacy: 105.3 lumens/watt
Spacing Criteria (0/90/45): 1.17 / 1.17 / 1.08
Luminous Opening: Circular (Dia: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 13.4
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P643242

CATALOG NUMBER: ML5615LSVWFL759FS1E - 692H - 1200LM - 3000K

Luminous Intensity Polar Plot

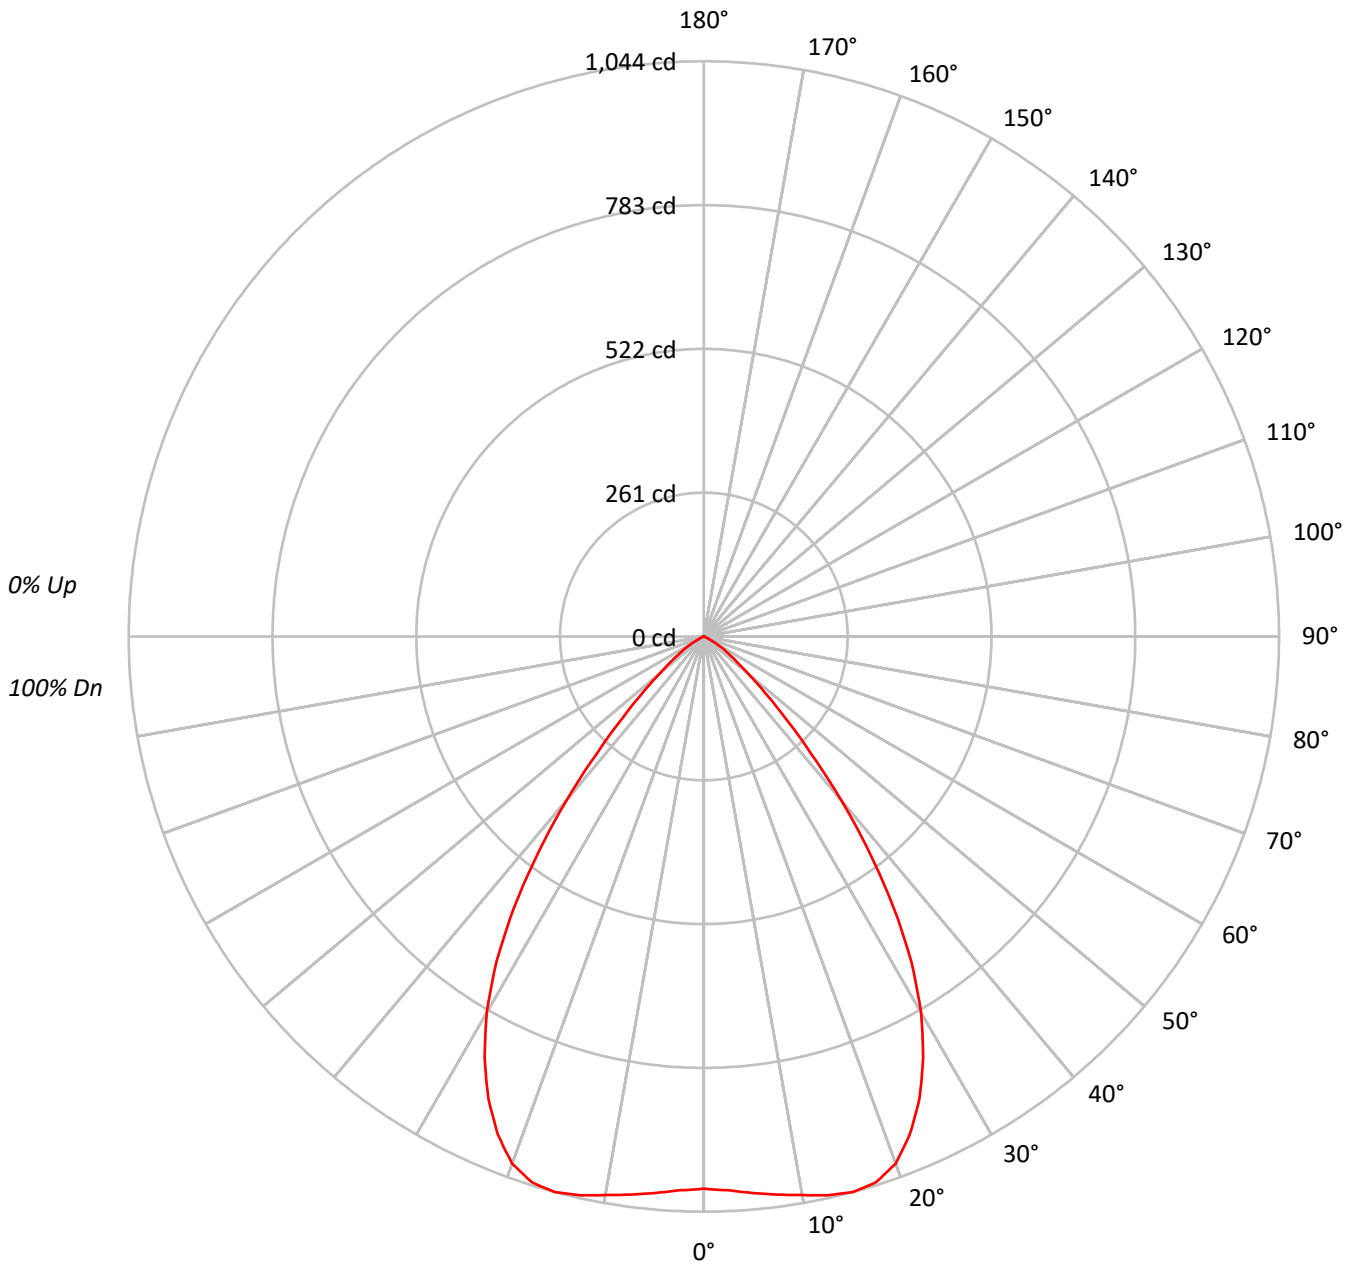



TEST NUMBER: P643242

CATALOG NUMBER: ML5615LSVWFL759FS1E - 692H - 1200LM - 3000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									20								
RC	80									50									30									10									0								
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0															
RCR																																													
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																											
1	113	110	107	105	110	108	105	103	104	102	100	100	98	97	96	95	94	92																											
2	107	101	97	93	104	99	95	92	96	93	90	93	90	88	90	88	86	84																											
3	100	93	88	83	98	92	87	83	89	85	81	87	83	80	84	81	79	77																											
4	94	86	80	75	93	85	79	75	83	78	74	81	76	73	79	75	72	70																											
5	89	80	73	68	87	79	73	68	77	71	67	75	70	67	73	69	66	65																											
6	84	74	67	62	82	73	67	62	71	66	62	70	65	61	69	64	61	59																											
7	79	69	62	57	77	68	62	57	67	61	57	65	60	56	64	60	56	55																											
8	74	64	57	53	73	63	57	53	62	56	52	61	56	52	60	55	52	50																											
9	70	60	53	49	69	59	53	49	58	53	49	57	52	48	56	52	48	47																											
10	67	56	50	45	66	55	49	45	55	49	45	54	49	45	53	48	45	43																											

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	494514
5°	502198
10°	515820
15°	533208
20°	534442
25°	503882
30°	448814
35°	361745
40°	248672
45°	144224
50°	79826
55°	48084
60°	25656
65°	7588
70°	1875
75°	2478
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 144224 cd/sqm



TEST NUMBER: P643242

CATALOG NUMBER: ML5615LSVWFL759FS1E - 692H - 1200LM - 3000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	97.3	6.9
10°-20°	293.6	20.8
20°-30°	421.3	29.9
30°-40°	368.9	26.1
40°-50°	168.6	11.9
50°-60°	52.4	3.7
60°-70°	8.4	0.6
70°-80°	0.9	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	812.2	57.5
0°-40°	1181.2	83.7
0°-60°	1402.2	99.3
0°-90°	1411.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1411.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1002	
5°	1014	97
15°	1044	294
25°	926	421
35°	601	369
45°	207	169
55°	56	52
65°	6	8
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P643242

CATALOG NUMBER: ML5615LSVWFL759FS1E - 692H - 1200LM - 3000K

CANDELA DISTRIBUTION (FULL):

	0°
0°	1002.3
2.5°	1006.2
5°	1014.0
7.5°	1021.8
10°	1029.6
12.5°	1038.7
15°	1043.9
17.5°	1038.7
20°	1017.9
22.5°	977.6
25°	925.6
27.5°	861.9
30°	787.8
32.5°	700.7
35°	600.6
37.5°	492.7
40°	386.1
42.5°	286.0
45°	206.7
47.5°	148.2
50°	104.0
52.5°	75.4
55°	55.9
57.5°	40.3
60°	26.0
62.5°	11.7
65°	6.5
67.5°	2.6
70°	1.3
72.5°	1.3
75°	1.3
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)