

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P643271

Luminaire Tested: ML5615LSVWFL759FS1E - 692W - 1200LM - 2700K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P643271
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-85)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5615LSVWFL759FS1E - 692W - 1200LM - 2700K
Description: ML56 RR, 75D TIR OPTIC, 6" WHITE TRIM
Light Source: (1) STANDARD SELECTABLE LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1383.7 lumens
Efficiency: N/A
Efficacy: 103.3 lumens/watt
Spacing Criteria (0/90/45): 1.18 / 1.18 / 1.09
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct


Input Watts (W): 13.4
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P643271

CATALOG NUMBER: ML5615LSVWFL759FS1E - 692W - 1200LM - 2700K

Luminous Intensity Polar Plot

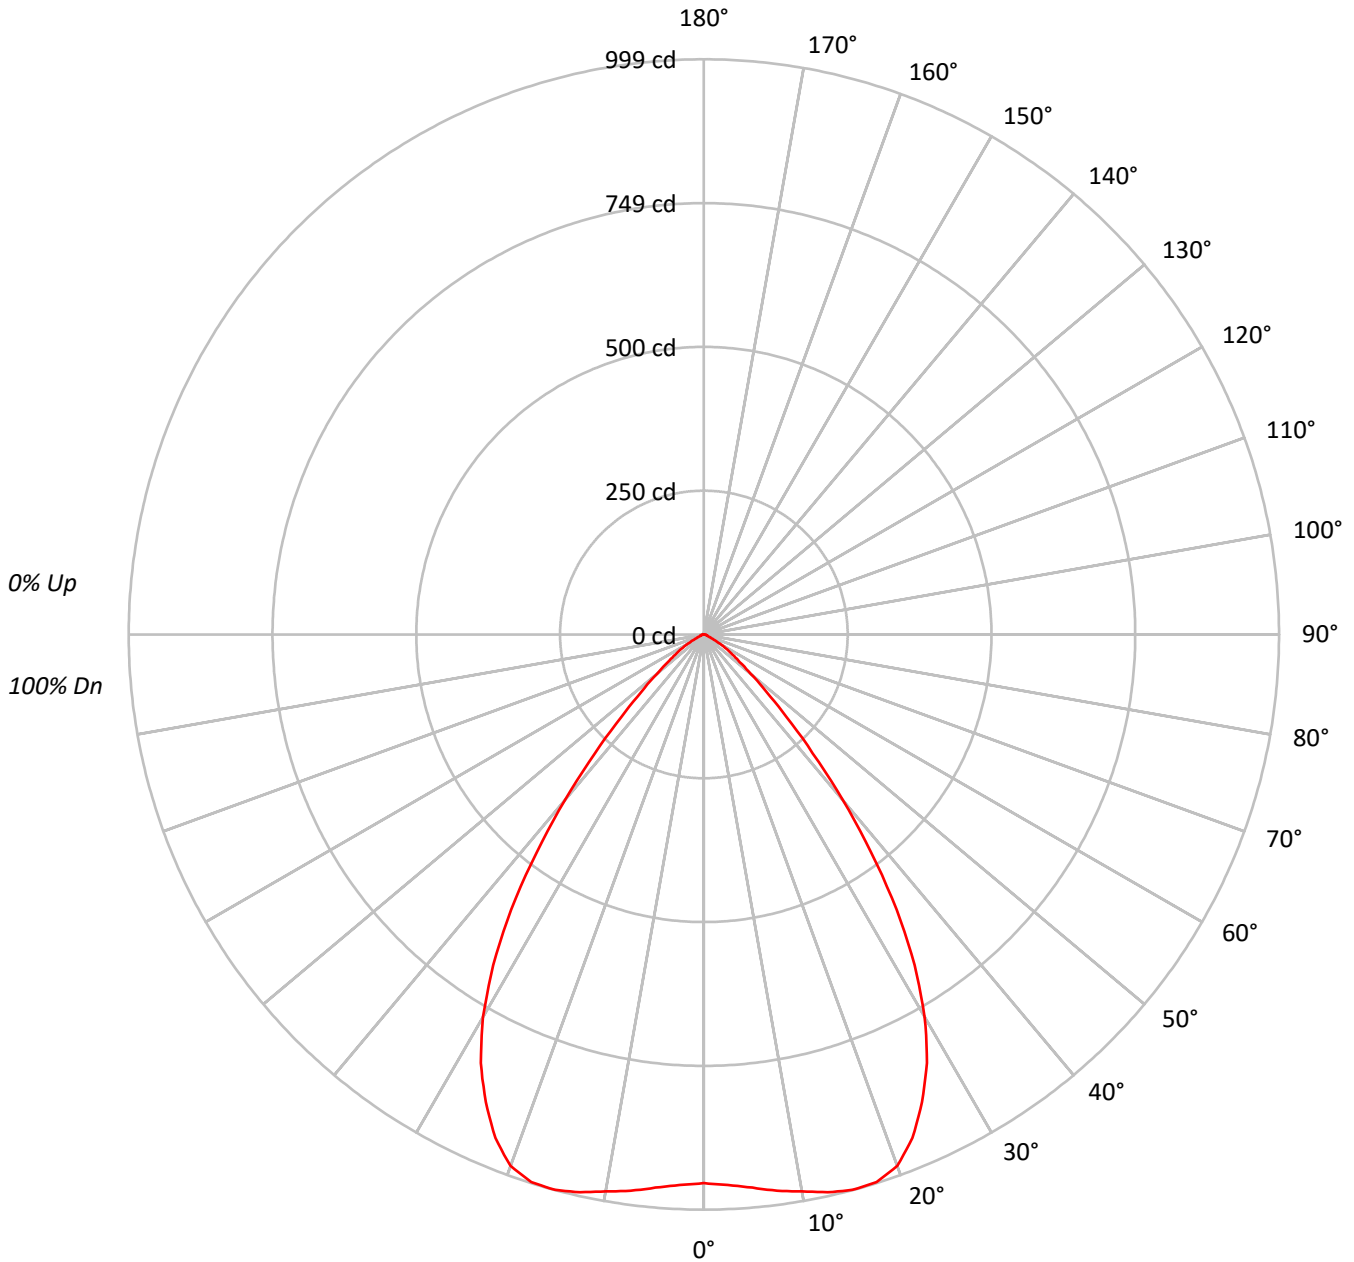



TEST NUMBER: P643271

CATALOG NUMBER: ML5615LSVWFL759FS1E - 692W - 1200LM - 2700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10			
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	113	110	107	104	110	107	105	103	103	101	100	100	98	97	96	95	94	92		
2	106	101	96	92	104	99	95	91	96	92	89	93	90	87	90	88	86	84		
3	100	93	87	83	98	91	86	82	89	84	81	86	82	79	84	81	78	76		
4	94	85	79	74	92	84	78	74	82	77	73	80	76	72	78	74	71	70		
5	88	79	72	68	87	78	72	67	76	71	67	74	70	66	73	69	65	64		
6	83	73	66	62	82	72	66	61	71	65	61	69	64	61	68	64	60	58		
7	78	68	61	56	77	67	61	56	66	60	56	65	60	56	63	59	55	54		
8	74	63	57	52	73	63	56	52	62	56	52	60	55	51	59	55	51	50		
9	70	59	53	48	69	59	52	48	58	52	48	57	51	48	56	51	47	46		
10	66	55	49	45	65	55	49	45	54	48	44	53	48	44	52	48	44	43		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	52244
5°	53071
10°	54669
15°	56675
20°	57294
25°	54203
30°	48552
35°	39050
40°	26807
45°	15699
50°	9066
55°	5811
60°	3465
65°	1647
70°	1010
75°	1080
80°	789
85°	818

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 15699 cd/sqm



TEST NUMBER: P643271

CATALOG NUMBER: ML5615LSVWFL759FS1E - 692W - 1200LM - 2700K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	92.7	6.7
10°-20°	281.4	20.3
20°-30°	408.6	29.5
30°-40°	358.3	25.9
40°-50°	165.5	12.0
50°-60°	56.3	4.1
60°-70°	14.3	1.0
70°-80°	5.2	0.4
80°-90°	1.4	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	782.7	56.6
0°-40°	1141.0	82.5
0°-60°	1362.8	98.5
0°-90°	1383.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1383.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	953	
5°	964	93
15°	999	281
25°	896	409
35°	584	358
45°	202	166
55°	61	56
65°	13	14
75°	5	5
85°	1	1
90°	0	



TEST NUMBER: P643271

CATALOG NUMBER: ML5615LSVWFL759FS1E - 692W - 1200LM - 2700K

CANDELA DISTRIBUTION (FULL):

0°	
0°	953.0
2.5°	956.8
5°	964.4
7.5°	974.5
10°	982.1
12.5°	992.3
15°	998.6
17.5°	997.3
20°	982.1
22.5°	946.7
25°	896.1
27.5°	839.1
30°	767.0
32.5°	680.9
35°	583.5
37.5°	477.1
40°	374.6
42.5°	279.7
45°	202.5
47.5°	146.8
50°	106.3
52.5°	78.5
55°	60.8
57.5°	45.6
60°	31.6
62.5°	19.0
65°	12.7
67.5°	7.6
70°	6.3
72.5°	6.3
75°	5.1
77.5°	3.8
80°	2.5
82.5°	2.5
85°	1.3
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)