

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P643322

Luminaire Tested: ML5615LSVWFL759FS1E - 693TBZB - 1500LM - 3000K

Issue Date: 2/17/2023

**Test Information**

Test Method: LM-79-2019  
Report Number: P643322  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-89)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/17/2023  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: HALO  
Catalog Number: ML5615LSVWFL759FS1E - 693TBZB - 1500LM - 3000K  
Description: ML56 RR, 75D TIR OPTIC, 6" TUSCON BRONZE BAFFLE TRIM  
Light Source: (1) STANDARD SELECTABLE LUMEN LED 90CRI / 3000K CCT  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 1692.1 lumens  
Efficiency: N/A  
Efficacy: 99.0 lumens/watt  
Spacing Criteria (0/90/45): 1.18 / 1.18 / 1.09  
Luminous Opening: Circular (Dia: 0.5' x H: 0')  
CIE Type: Direct

Input Watts (W): 17.1  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



TEST NUMBER: P643322  
CATALOG NUMBER: ML5615LSVWFL759FS1E - 693TBZB - 1500LM - 3000K

### Luminous Intensity Polar Plot

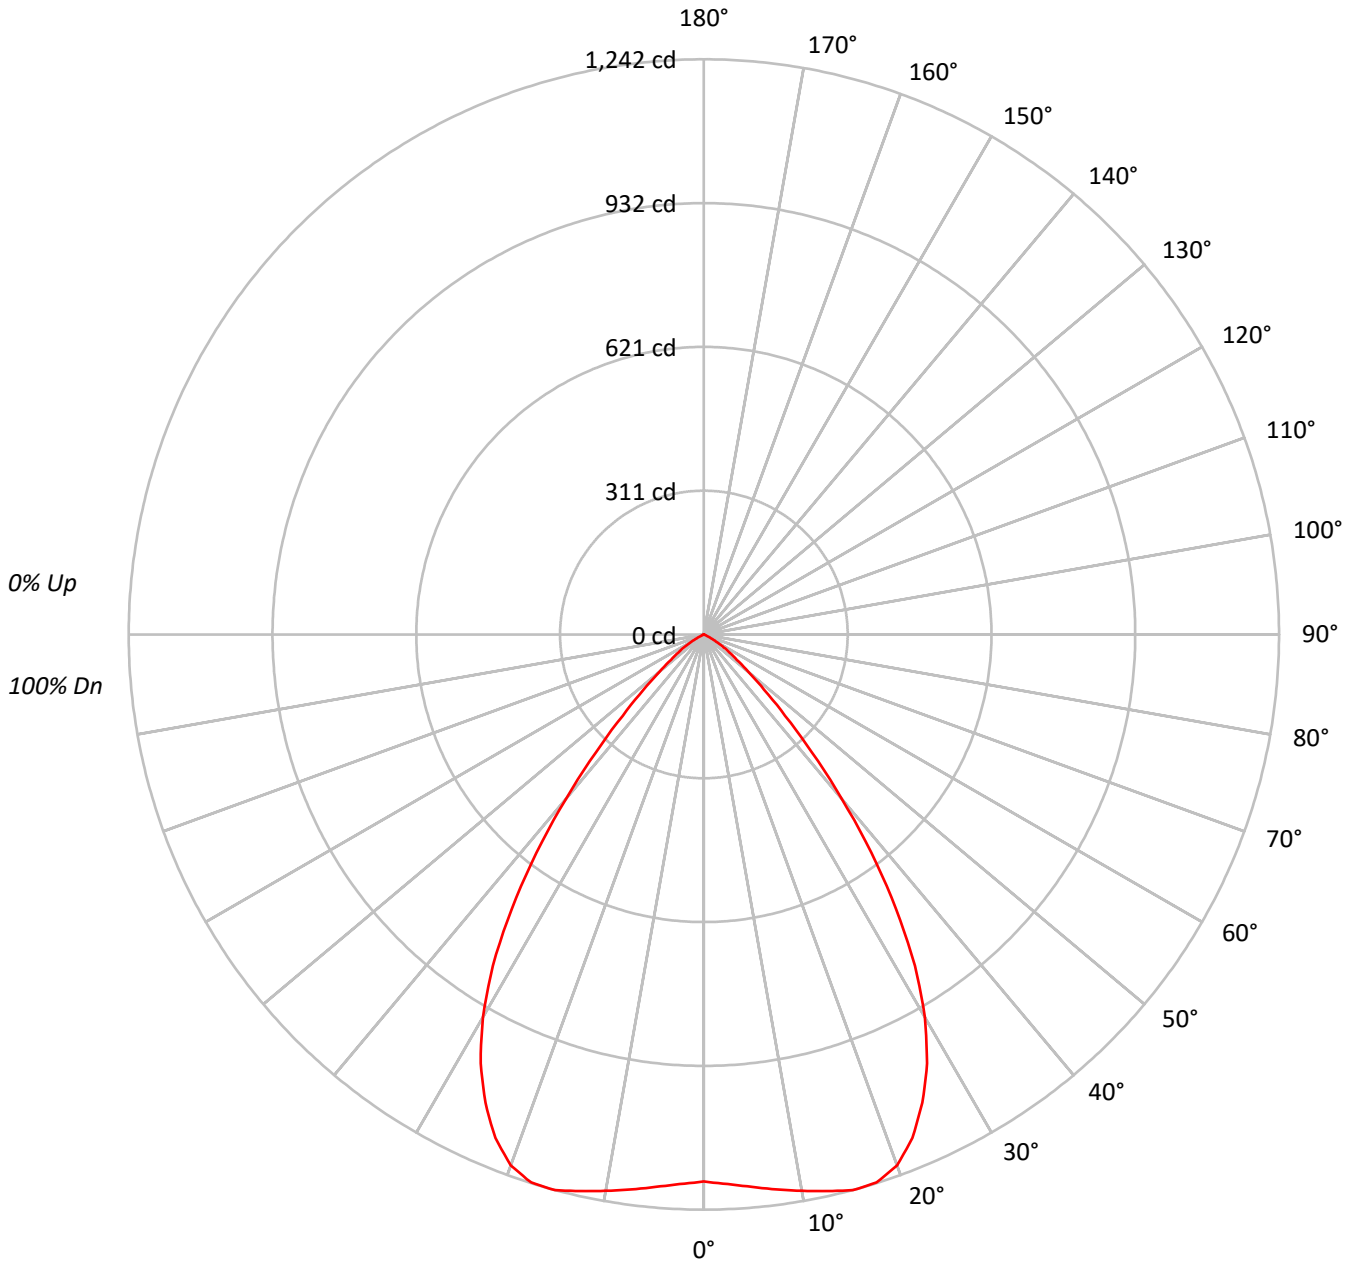



TEST NUMBER: P643322

CATALOG NUMBER: ML5615LSVWFL759FS1E - 693TBZB - 1500LM - 3000K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	107	105	110	108	105	103	104	102	100	100	98	97	96	95	94	92	92	92	92
2	107	101	97	93	104	99	95	92	96	93	90	93	90	88	90	88	86	84	84	84	84
3	100	93	88	83	98	92	87	83	89	85	81	87	83	80	84	81	79	77	77	77	77
4	94	86	80	75	93	85	79	75	83	78	74	81	76	73	79	75	72	70	70	70	70
5	89	80	73	68	87	79	73	68	77	71	67	75	70	67	73	69	66	65	65	65	65
6	84	74	67	62	82	73	67	62	71	66	62	70	65	61	69	64	61	59	59	59	59
7	79	69	62	57	77	68	62	57	67	61	57	65	60	56	64	60	56	55	55	55	55
8	74	64	57	53	73	63	57	53	62	56	52	61	56	52	60	55	52	50	50	50	50
9	70	60	53	49	69	59	53	49	58	52	48	57	52	48	56	52	48	47	47	47	47
10	67	56	49	45	66	55	49	45	55	49	45	54	49	45	53	48	45	43	43	43	43

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	64765
5°	65892
10°	67901
15°	70500
20°	71161
25°	67492
30°	60395
35°	48426
40°	33105
45°	19235
50°	10652
55°	6423
60°	3333
65°	830
70°	0
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 19235 cd/sqm



TEST NUMBER: P643322

CATALOG NUMBER: ML5615LSVWFL759FS1E - 693TBZB - 1500LM - 3000K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	115.0	6.8
10°-20°	349.7	20.7
20°-30°	508.2	30.0
30°-40°	445.3	26.3
40°-50°	202.1	11.9
50°-60°	62.6	3.7
60°-70°	9.1	0.5
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	973.0	57.5
0°-40°	1418.3	83.8
0°-60°	1682.9	99.5
0°-90°	1692.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1692.1	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1181	
5°	1197	115
15°	1242	350
25°	1116	508
35°	724	445
45°	248	202
55°	67	63
65°	6	9
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P643322

CATALOG NUMBER: ML5615LSVWFL759FS1E - 693TBZB - 1500LM - 3000K

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	1181.4
2.5°	1187.8
5°	1197.4
7.5°	1208.6
10°	1219.8
12.5°	1231.0
15°	1242.2
17.5°	1240.6
20°	1219.8
22.5°	1176.6
25°	1115.8
27.5°	1043.7
30°	954.1
32.5°	848.4
35°	723.6
37.5°	593.9
40°	462.6
42.5°	344.2
45°	248.1
47.5°	176.1
50°	124.9
52.5°	89.6
55°	67.2
57.5°	48.0
60°	30.4
62.5°	14.4
65°	6.4
67.5°	1.6
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)