

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P643415

Luminaire Tested: ML5615LSVWFL9FS1E - 592H - 1500LM - 5000K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P643415
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-95)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5615LSVWFL9FS1E - 592H - 1500LM - 5000K
Description: ML56 RR, MILKY OPTIC, 5" HAZE TRIM
Light Source: (1) STANDARD SELECTABLE LUMEN LED 90CRI / 5000K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1733.7 lumens
Efficiency: N/A
Efficacy: 101.4 lumens/watt
Spacing Criteria (0/90/45): 0.89 / 0.89 / 0.97
Luminous Opening: Circular (Dia: 0.42' x H: 0')
CIE Type: Direct

Input Watts (W): 17.1
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P643415
CATALOG NUMBER: ML5615LSVWFL9FS1E - 592H - 1500LM - 5000K

Luminous Intensity Polar Plot

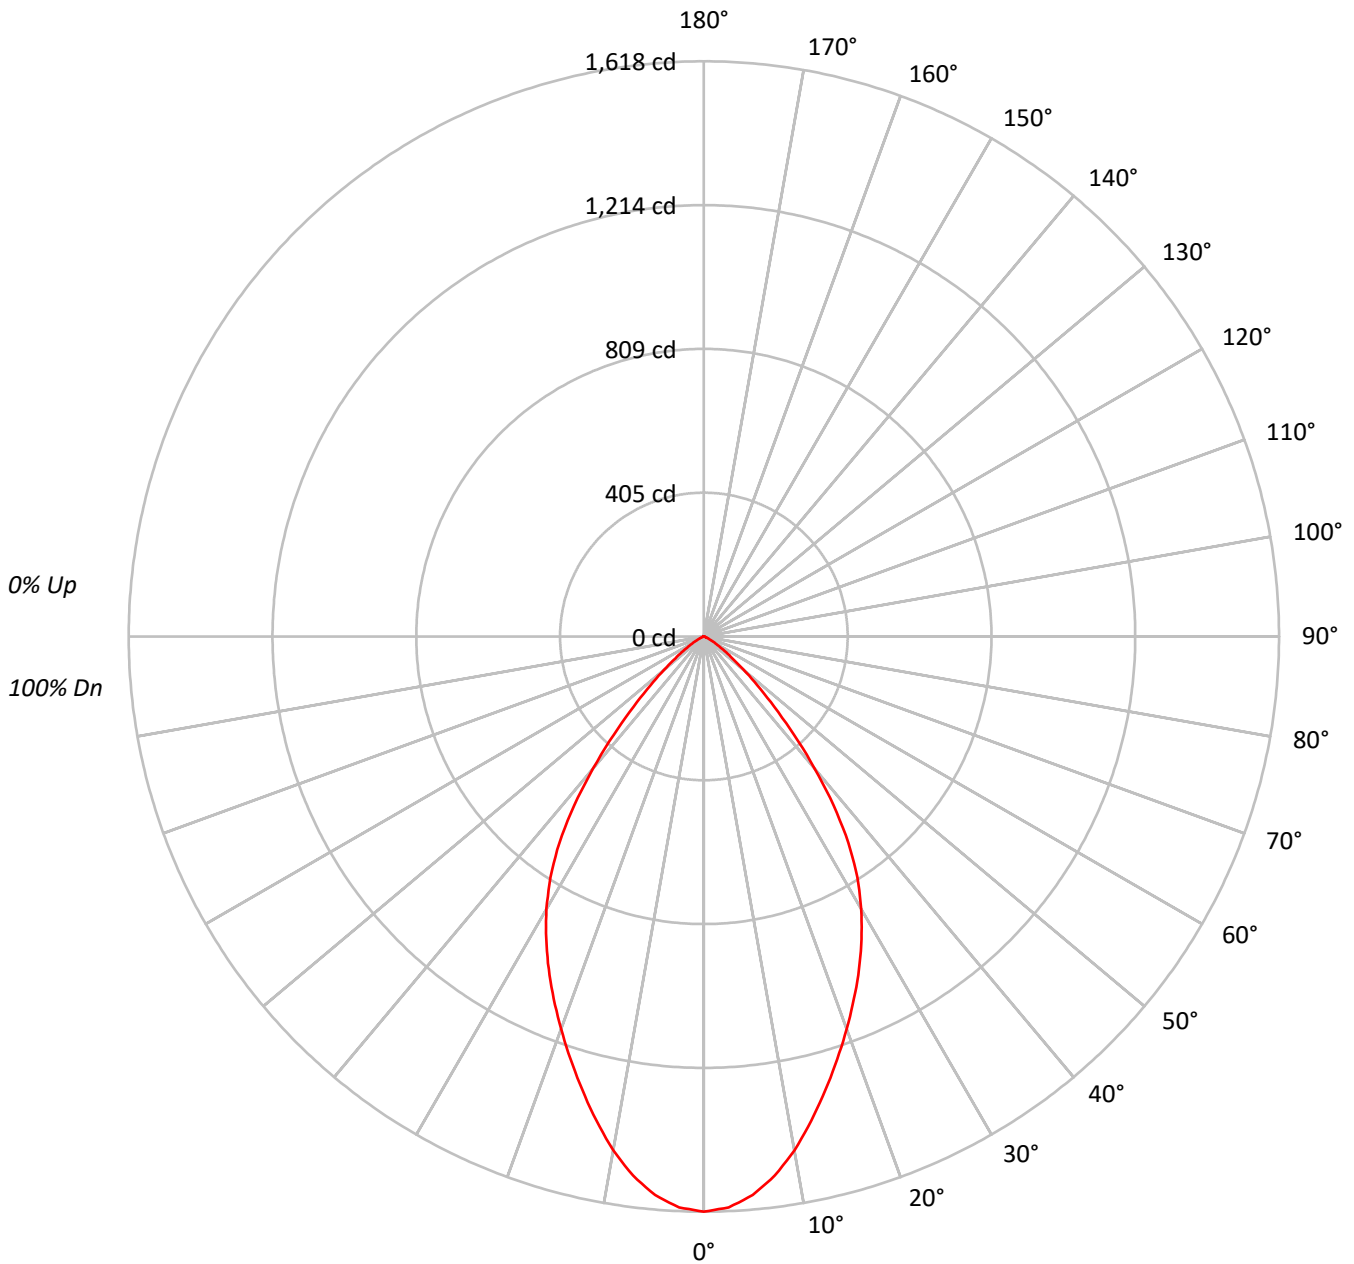



TEST NUMBER: P643415

CATALOG NUMBER: ML5615LSVWFL9FS1E - 592H - 1500LM - 5000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100																
1	113	110	107	105	110	108	105	103	104	102	100	100	98	97	96	95	94	92			92																
2	107	101	97	93	104	99	95	92	96	93	90	93	90	88	90	88	86	84			84																
3	100	93	88	83	98	92	87	83	89	85	81	87	83	80	84	81	79	77			77																
4	95	86	80	75	93	85	79	75	83	78	74	81	76	73	79	75	72	71			71																
5	89	80	73	68	87	79	73	68	77	72	68	75	71	67	74	70	66	65			65																
6	84	74	67	63	82	73	67	62	72	66	62	70	65	62	69	64	61	60			60																
7	79	69	62	58	78	68	62	57	67	61	57	66	61	57	64	60	56	55			55																
8	75	64	58	53	73	64	57	53	63	57	53	61	56	53	60	56	52	51			51																
9	71	60	54	49	70	60	53	49	59	53	49	58	53	49	57	52	49	47			47																
10	67	56	50	46	66	56	50	46	55	50	46	54	49	46	54	49	45	44			44																

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	127726
5°	124997
10°	117649
15°	107951
20°	98641
25°	89950
30°	80753
35°	68335
40°	49928
45°	31192
50°	17807
55°	9730
60°	5021
65°	2316
70°	1223
75°	549
80°	818
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 31192 cd/sqm



TEST NUMBER: P643415

CATALOG NUMBER: ML5615LSVWFL9FS1E - 592H - 1500LM - 5000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	147.1	8.5
10°-20°	370.2	21.4
20°-30°	473.6	27.3
30°-40°	434.3	25.0
40°-50°	223.4	12.9
50°-60°	68.0	3.9
60°-70°	14.1	0.8
70°-80°	2.8	0.2
80°-90°	0.2	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	990.8	57.2
0°-40°	1425.1	82.2
0°-60°	1716.5	99.0
0°-90°	1733.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1733.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1618	
5°	1577	147
15°	1321	370
25°	1033	474
35°	709	434
45°	279	223
55°	71	68
65°	12	14
75°	2	3
85°	0	0
90°	0	



TEST NUMBER: P643415

CATALOG NUMBER: ML5615LSVWFL9FS1E - 592H - 1500LM - 5000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	1618.0
2.5°	1607.4
5°	1577.4
7.5°	1529.6
10°	1467.7
12.5°	1395.2
15°	1320.9
17.5°	1246.7
20°	1174.2
22.5°	1103.4
25°	1032.7
27.5°	960.2
30°	885.9
32.5°	802.8
35°	709.1
37.5°	599.5
40°	484.5
42.5°	374.9
45°	279.4
47.5°	203.4
50°	145.0
52.5°	100.8
55°	70.7
57.5°	47.7
60°	31.8
62.5°	19.5
65°	12.4
67.5°	7.1
70°	5.3
72.5°	3.5
75°	1.8
77.5°	1.8
80°	1.8
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)