

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P643443

Luminaire Tested: ML5615LSVWFL9FS1E - 592W - 1500LM - 3500K

Issue Date: 2/17/2023

**Test Information**

Test Method: LM-79-2019  
Report Number: P643443  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-96)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/17/2023  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: HALO  
Catalog Number: ML5615LSVWFL9FS1E - 592W - 1500LM - 3500K  
Description: ML56 RR, MILKY OPTIC, 5" WHITE TRIM  
Light Source: (1) STANDARD SELECTABLE LUMEN LED 90CRI / 3500K CCT  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 1601.7 lumens  
Efficiency: N/A  
Efficacy: 93.7 lumens/watt  
Spacing Criteria (0/90/45): 1.16 / 1.16 / 1.14  
Luminous Opening: Circular (Dia: 0.5' x H: 0')  
CIE Type: Direct

Input Watts (W): 17.1  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



TEST NUMBER: P643443  
CATALOG NUMBER: ML5615LSVWFL9FS1E - 592W - 1500LM - 3500K

### Luminous Intensity Polar Plot

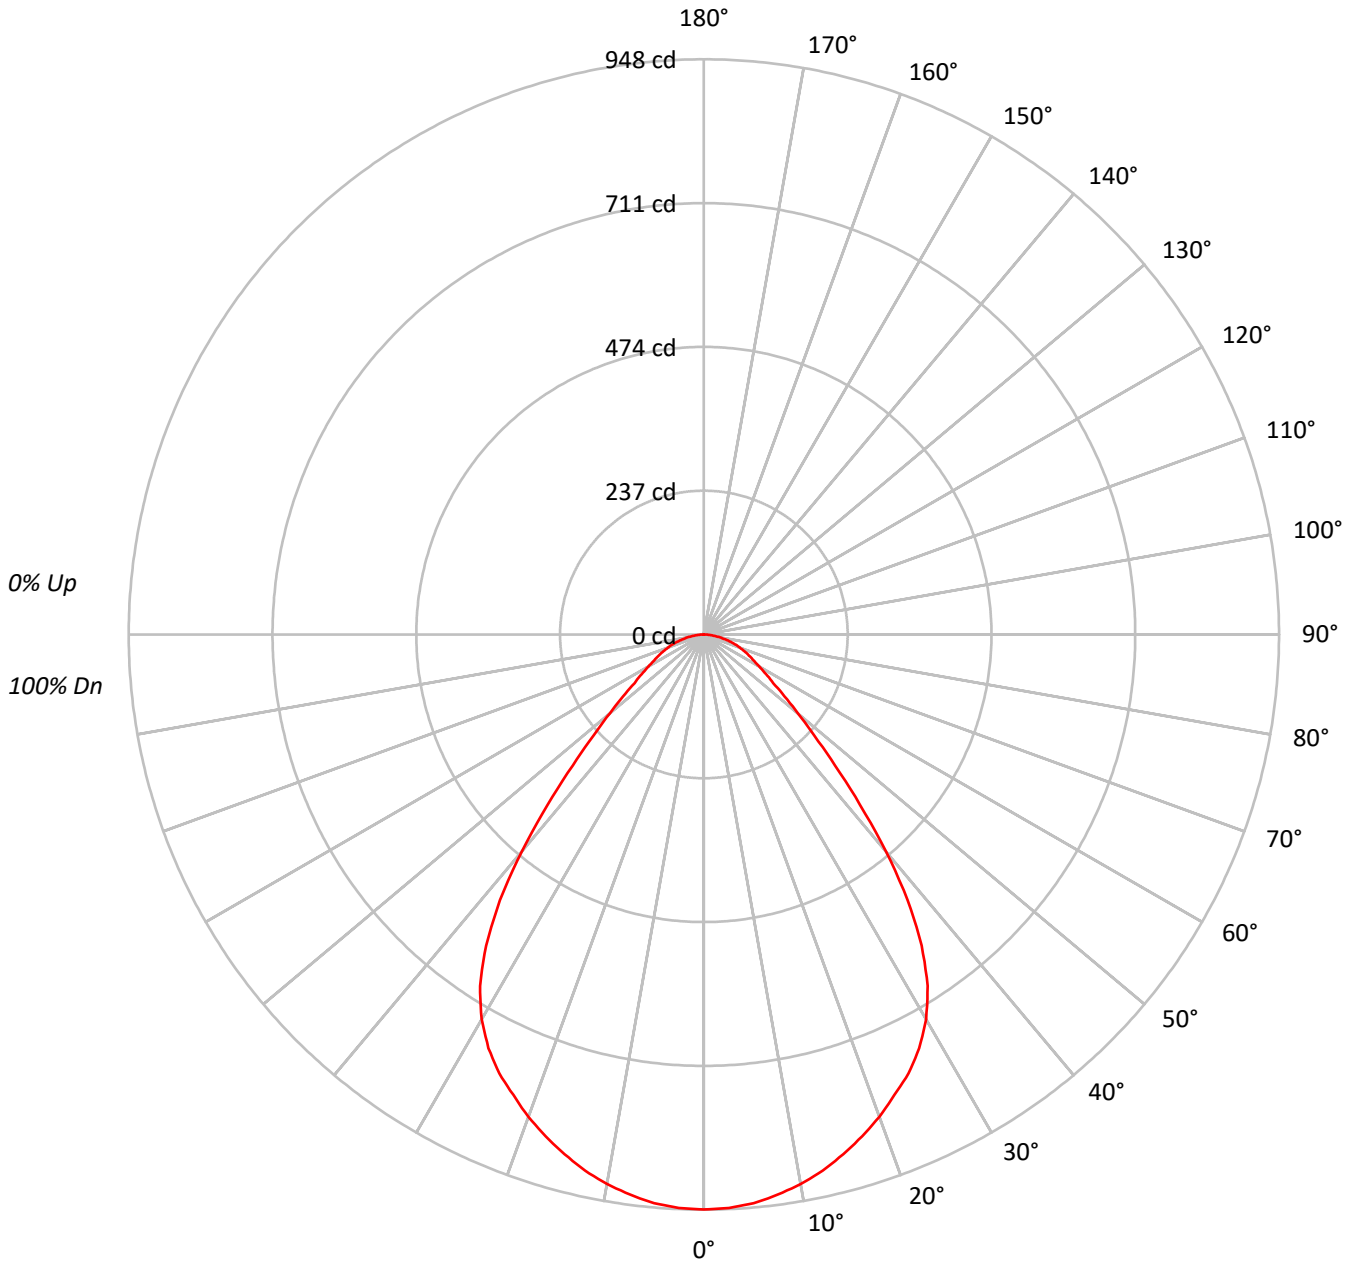



TEST NUMBER: P643443

CATALOG NUMBER: ML5615LSVWFL9FS1E - 592W - 1500LM - 3500K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	111	107	104	101	109	105	102	99	101	99	96	97	95	93	94	92	91	89																			
2	103	97	91	87	101	95	90	86	92	88	84	89	85	82	86	83	80	78																			
3	96	88	81	76	94	86	80	75	83	78	74	81	76	73	78	75	71	70																			
4	90	80	72	67	87	78	72	66	76	70	66	74	69	65	72	68	64	62																			
5	84	73	65	60	82	72	65	59	70	64	59	68	62	58	66	61	58	56																			
6	78	67	59	54	76	66	59	53	64	58	53	63	57	53	61	56	52	50																			
7	73	61	54	49	72	61	54	48	59	53	48	58	52	48	57	52	48	46																			
8	69	57	49	44	67	56	49	44	55	49	44	54	48	44	53	47	44	42																			
9	65	53	45	41	63	52	45	41	51	45	40	50	44	40	49	44	40	38																			
10	61	49	42	37	60	49	42	37	48	41	37	47	41	37	46	41	37	35																			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	51953
5°	51788
10°	51201
15°	50335
20°	49348
25°	48281
30°	46368
35°	41880
40°	33384
45°	23685
50°	17228
55°	13342
60°	11523
65°	10650
70°	10002
75°	9383
80°	8303
85°	6227

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 23685 cd/sqm



TEST NUMBER: P643443

CATALOG NUMBER: ML5615LSVWFL9FS1E - 592W - 1500LM - 3500K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	89.1	5.6
10°-20°	249.9	15.6
20°-30°	366.2	22.9
30°-40°	383.7	24.0
40°-50°	242.5	15.1
50°-60°	129.8	8.1
60°-70°	81.7	5.1
70°-80°	46.8	2.9
80°-90°	12.1	0.8
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	705.2	44.0
0°-40°	1088.9	68.0
0°-60°	1461.1	91.2
0°-90°	1601.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1601.7	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	948	
5°	941	89
15°	887	250
25°	798	366
35°	626	384
45°	306	243
55°	140	130
65°	82	82
75°	44	47
85°	10	12
90°	0	



TEST NUMBER: P643443

CATALOG NUMBER: ML5615LSVWFL9FS1E - 592W - 1500LM - 3500K

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	947.7
2.5°	946.0
5°	941.1
7.5°	931.3
10°	919.8
12.5°	905.0
15°	886.9
17.5°	867.2
20°	845.9
22.5°	821.2
25°	798.2
27.5°	768.7
30°	732.5
32.5°	686.5
35°	625.8
37.5°	551.9
40°	466.5
42.5°	381.0
45°	305.5
47.5°	246.4
50°	202.0
52.5°	167.5
55°	139.6
57.5°	121.5
60°	105.1
62.5°	92.0
65°	82.1
67.5°	72.3
70°	62.4
72.5°	54.2
75°	44.3
77.5°	34.5
80°	26.3
82.5°	18.1
85°	9.9
87.5°	3.3
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)