

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P643465

Luminaire Tested: ML5615LSVWFL9FS1E - 593BB - 900LM - 5000K

Issue Date: 2/17/2023

**Test Information**

Test Method: LM-79-2019  
Report Number: P643465  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-98)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/17/2023  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: HALO  
Catalog Number: ML5615LSVWFL9FS1E - 593BB - 900LM - 5000K  
Description: ML56 RR, MILKY OPTIC, 5" BLACK BAFFLE TRIM  
Light Source: (1) STANDARD SELECTABLE LUMEN LED 90CRI / 5000K CCT  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 792.1 lumens  
Efficiency: N/A  
Efficacy: 75.4 lumens/watt  
Spacing Criteria (0/90/45): 1.15 / 1.15 / 1.11  
Luminous Opening: Circular (Dia: 0.5' x H: 0')  
CIE Type: Direct

Input Watts (W): 10.5  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



TEST NUMBER: P643465  
CATALOG NUMBER: ML5615LSVWFL9FS1E - 593BB - 900LM - 5000K

### Luminous Intensity Polar Plot

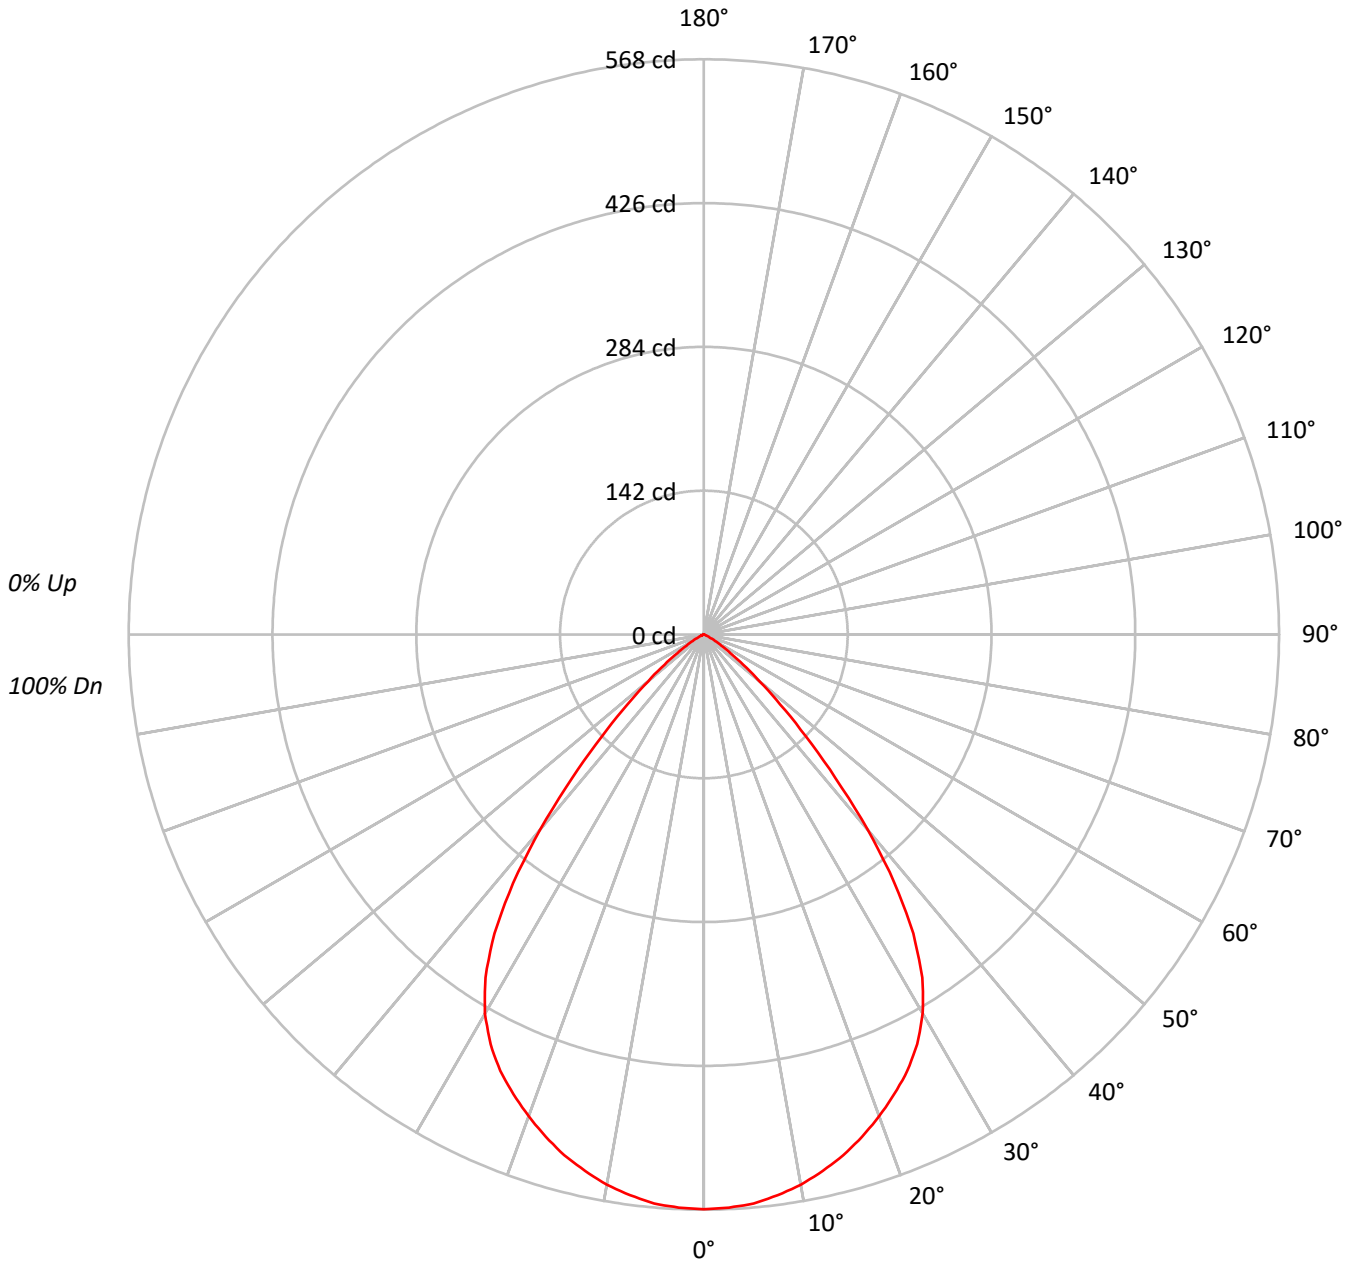



TEST NUMBER: P643465  
 CATALOG NUMBER: ML5615LSVWFL9FS1E - 593BB - 900LM - 5000K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100															
1	113	110	107	104	110	108	105	103	103	101	100	100	98	97	96	95	94	92				92															
2	106	101	96	92	104	99	95	91	96	92	89	93	90	87	90	88	86	84				84															
3	100	93	87	82	98	91	86	82	88	84	80	86	82	79	84	81	78	76				76															
4	94	85	79	74	92	84	78	74	82	77	73	80	75	72	78	74	71	69				69															
5	88	79	72	67	86	78	71	67	76	70	66	74	69	65	72	68	65	63				63															
6	83	73	66	61	81	72	65	61	70	65	60	69	64	60	67	63	59	58				58															
7	78	67	60	56	76	67	60	56	65	59	55	64	59	55	63	58	55	53				53															
8	73	63	56	51	72	62	56	51	61	55	51	60	54	51	59	54	50	49				49															
9	69	58	52	47	68	58	51	47	57	51	47	56	50	47	55	50	46	45				45															
10	65	54	48	44	64	54	48	44	53	47	43	52	47	43	52	47	43	42				42															

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	31116
5°	31048
10°	30711
15°	30216
20°	29531
25°	28762
30°	27365
35°	24132
40°	17991
45°	11024
50°	6115
55°	3049
60°	1371
65°	441
70°	176
75°	233
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 11024 cd/sqm



TEST NUMBER: P643465

CATALOG NUMBER: ML5615LSVWFL9FS1E - 593BB - 900LM - 5000K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	53.4	6.7
10°-20°	149.9	18.9
20°-30°	218.0	27.5
30°-40°	219.8	27.7
40°-50°	113.9	14.4
50°-60°	31.7	4.0
60°-70°	4.7	0.6
70°-80°	0.7	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	421.3	53.2
0°-40°	641.0	80.9
0°-60°	786.6	99.3
0°-90°	792.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	792.1	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	568	
5°	564	53
15°	532	150
25°	476	218
35°	361	220
45°	142	114
55°	32	32
65°	3	5
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P643465  
CATALOG NUMBER: ML5615LSVWFL9FS1E - 593BB - 900LM - 5000K

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	567.6
2.5°	566.5
5°	564.2
7.5°	558.5
10°	551.7
12.5°	542.6
15°	532.4
17.5°	519.9
20°	506.2
22.5°	491.4
25°	475.5
27.5°	456.2
30°	432.3
32.5°	401.6
35°	360.6
37.5°	309.4
40°	251.4
42.5°	192.2
45°	142.2
47.5°	102.4
50°	71.7
52.5°	48.9
55°	31.9
57.5°	20.5
60°	12.5
62.5°	6.8
65°	3.4
67.5°	2.3
70°	1.1
72.5°	1.1
75°	1.1
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)