

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P643466

Luminaire Tested: ML5615LSVWFL9FS1E - 593SNB - 1200LM - 2700K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P643466
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-99)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5615LSVWFL9FS1E - 593SNB - 1200LM - 2700K
Description: ML56 RR, MILKY OPTIC, 5" SATIN NICKLE BAFFLE TRIM
Light Source: (1) STANDARD SELECTABLE LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1060.6 lumens
Efficiency: N/A
Efficacy: 79.2 lumens/watt
Spacing Criteria (0/90/45): 1.17 / 1.17 / 1.14
Luminous Opening: Circular (Dia: 0.42' x H: 0')
CIE Type: Direct

Input Watts (W): 13.4
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P643466
CATALOG NUMBER: ML5615LSVWFL9FS1E - 593SNB - 1200LM - 2700K

Luminous Intensity Polar Plot

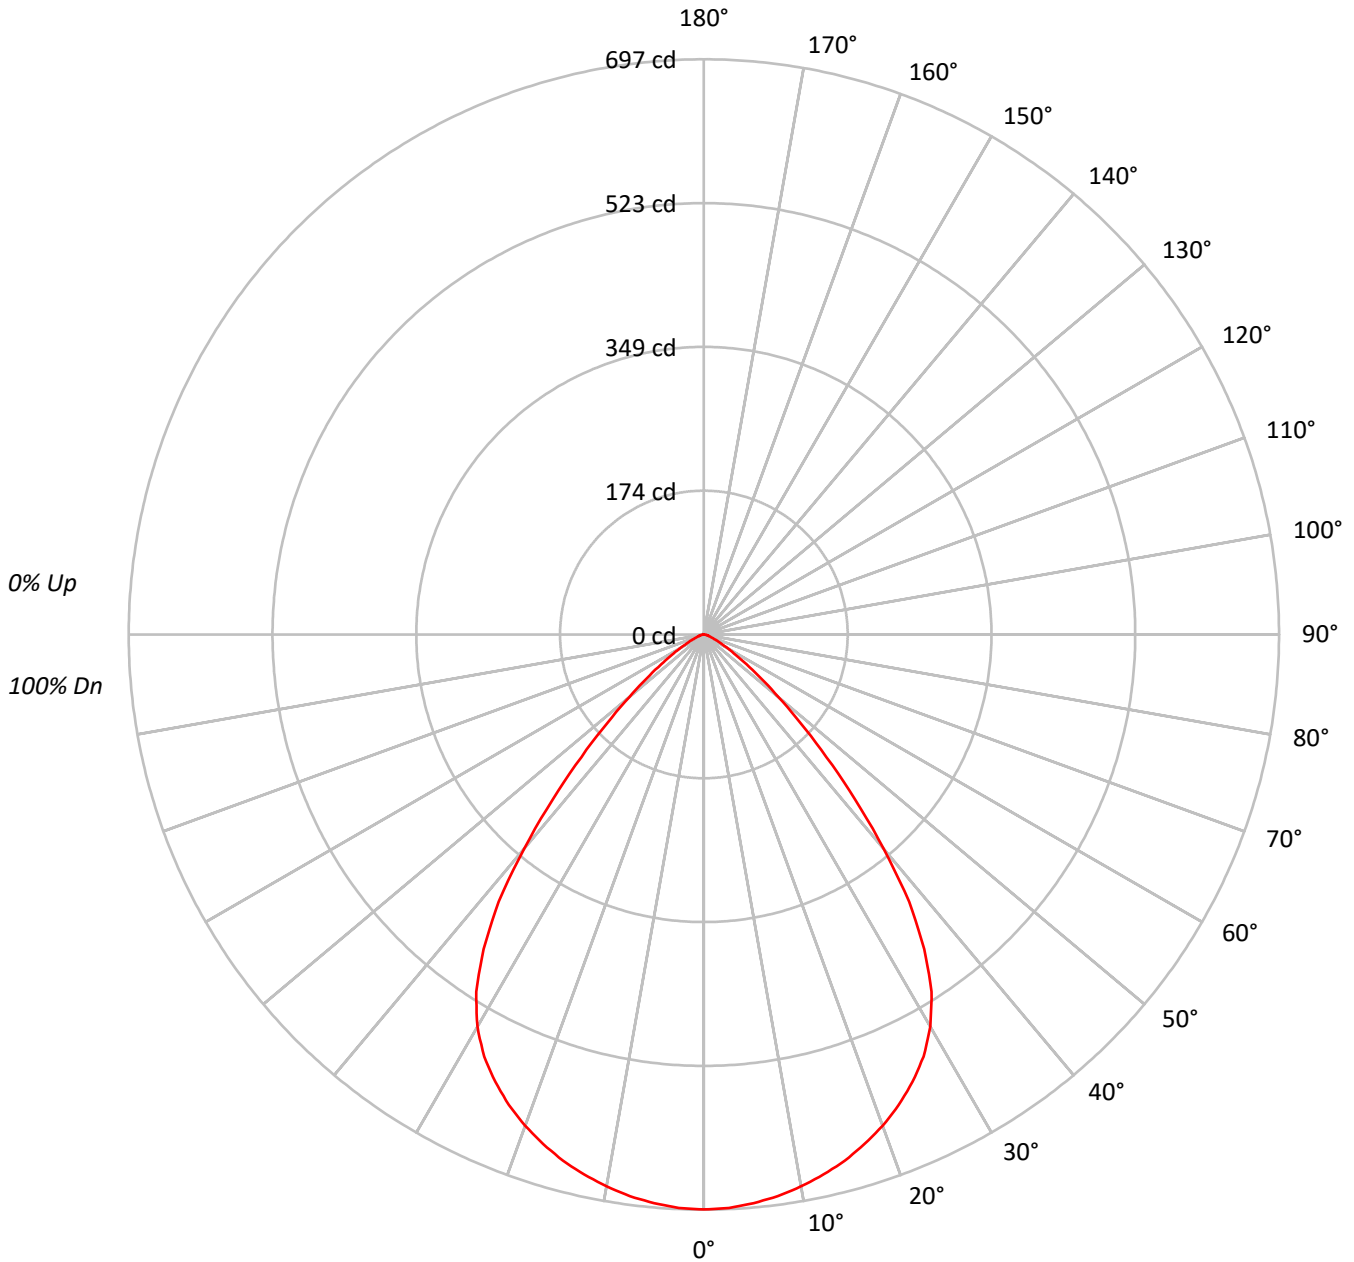



TEST NUMBER: P643466

CATALOG NUMBER: ML5615LSVWFL9FS1E - 593SNB - 1200LM - 2700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	112	109	106	104	110	107	104	102	103	101	99	99	97	96	96	94	93	91																			
2	106	100	95	91	103	98	94	90	95	91	88	92	89	86	89	86	84	82																			
3	99	91	85	81	97	90	84	80	87	82	79	84	81	77	82	79	76	74																			
4	93	84	77	72	91	82	76	72	80	75	71	78	73	70	76	72	69	67																			
5	87	77	70	65	85	76	69	64	74	68	64	72	67	63	70	66	63	61																			
6	81	71	64	59	80	70	63	58	68	62	58	67	62	58	65	61	57	55																			
7	76	65	58	53	75	65	58	53	63	57	53	62	57	53	61	56	52	51																			
8	72	61	54	49	70	60	53	49	59	53	48	58	52	48	57	52	48	46																			
9	68	56	50	45	66	56	49	45	55	49	45	54	48	44	53	48	44	43																			
10	64	53	46	41	63	52	46	41	51	45	41	50	45	41	50	45	41	39																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	54998
5°	54812
10°	54428
15°	53947
20°	53219
25°	52096
30°	50025
35°	44841
40°	34924
45°	23433
50°	14442
55°	8698
60°	5194
65°	3063
70°	1754
75°	1556
80°	1137
85°	1177

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 23433 cd/sqm



TEST NUMBER: P643466

CATALOG NUMBER: ML5615LSVWFL9FS1E - 593SNB - 1200LM - 2700K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	65.6	6.2
10°-20°	186.0	17.5
20°-30°	274.6	25.9
30°-40°	285.0	26.9
40°-50°	165.5	15.6
50°-60°	60.1	5.7
60°-70°	17.4	1.6
70°-80°	5.3	0.5
80°-90°	1.0	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	526.3	49.6
0°-40°	811.2	76.5
0°-60°	1036.8	97.8
0°-90°	1060.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1060.6	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	697	
5°	692	66
15°	660	186
25°	598	275
35°	465	285
45°	210	165
55°	63	60
65°	16	17
75°	5	5
85°	1	1
90°	0	



TEST NUMBER: P643466

CATALOG NUMBER: ML5615LSVWFL9FS1E - 593SNB - 1200LM - 2700K

CANDELA DISTRIBUTION (FULL):

	0°
0°	696.7
2.5°	695.5
5°	691.7
7.5°	686.6
10°	679.0
12.5°	670.2
15°	660.1
17.5°	647.4
20°	633.5
22.5°	617.1
25°	598.1
27.5°	576.6
30°	548.8
32.5°	513.4
35°	465.3
37.5°	408.4
40°	338.9
42.5°	270.6
45°	209.9
47.5°	158.1
50°	117.6
52.5°	87.3
55°	63.2
57.5°	45.5
60°	32.9
62.5°	22.8
65°	16.4
67.5°	11.4
70°	7.6
72.5°	6.3
75°	5.1
77.5°	3.8
80°	2.5
82.5°	1.3
85°	1.3
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)