

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P643481

Luminaire Tested: ML5615LSVWFL9FS1E - 593TBZB - 1200LM - 2700K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P643481
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-100)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5615LSVWFL9FS1E - 593TBZB - 1200LM - 2700K
Description: ML56 RR, MILKY OPTIC, 5" TUSCON BRONZE BAFFLE TRIM
Light Source: (1) STANDARD SELECTABLE LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 928.3 lumens
Efficiency: N/A
Efficacy: 69.3 lumens/watt
Spacing Criteria (0/90/45): 1.15 / 1.15 / 1.12
Luminous Opening: Circular (Dia: 0.42' x H: 0')
CIE Type: Direct


Input Watts (W): 13.4
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P643481

CATALOG NUMBER: ML5615LSVWFL9FS1E - 593TBZB - 1200LM - 2700K

Luminous Intensity Polar Plot

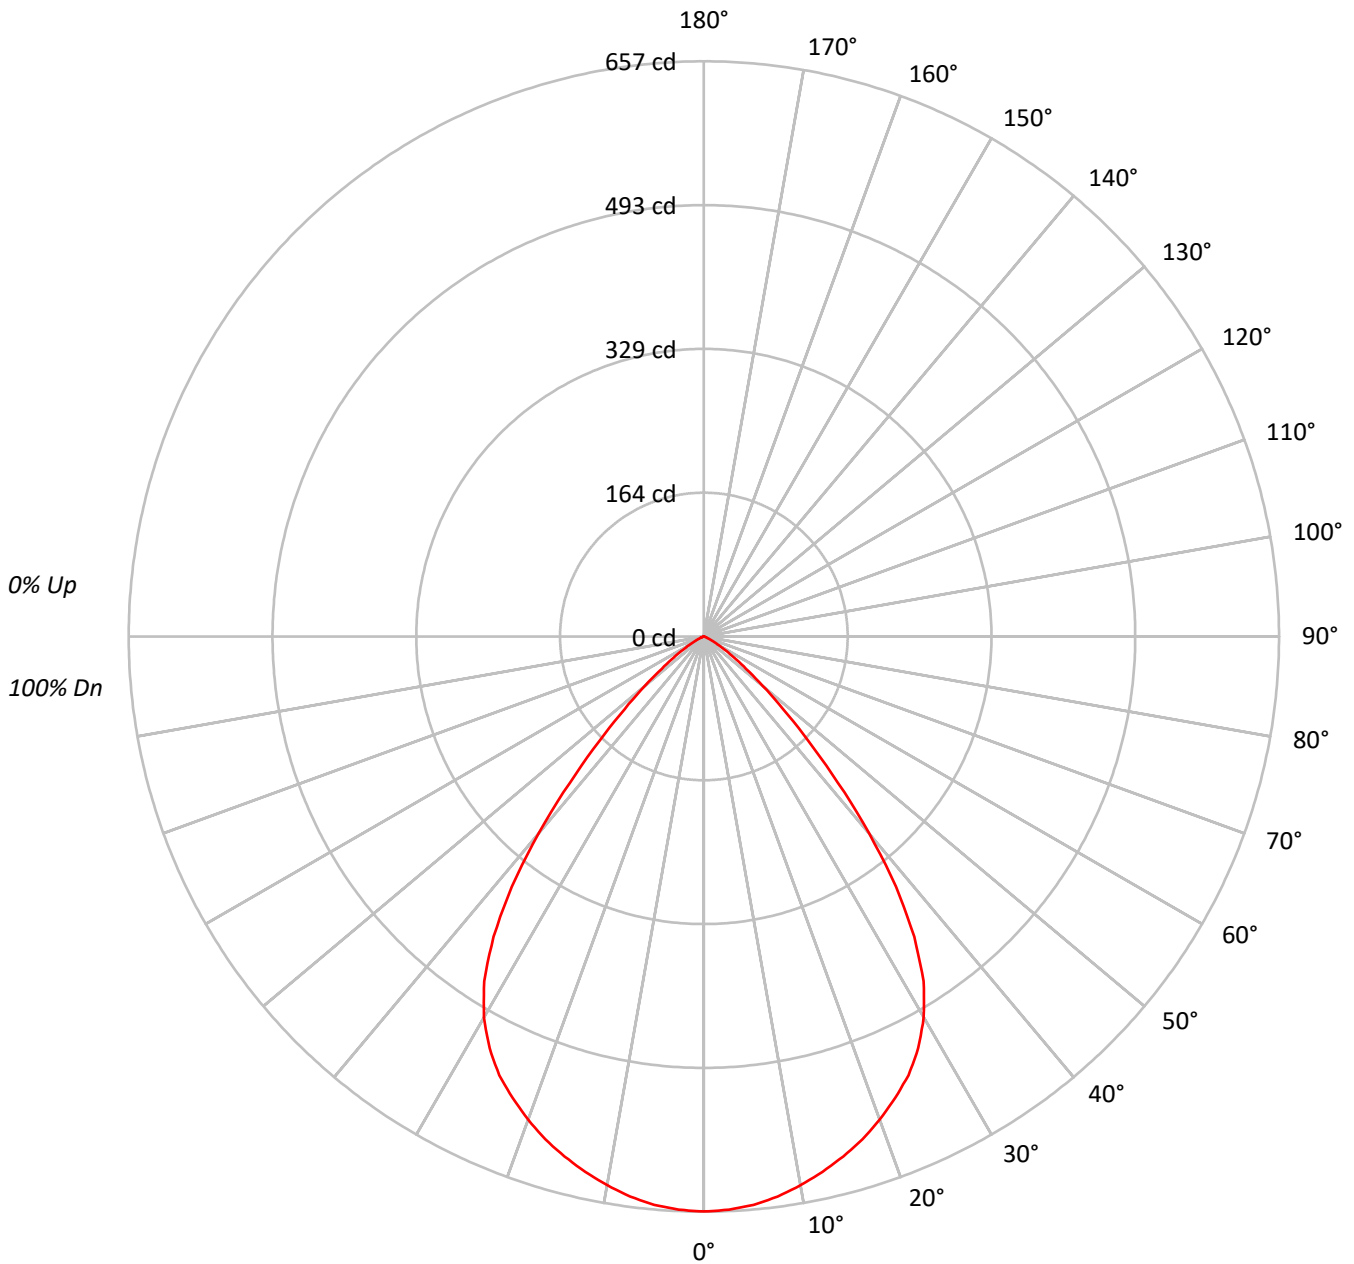



TEST NUMBER: P643481

CATALOG NUMBER: ML5615LSVWFL9FS1E - 593TBZB - 1200LM - 2700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	107	104	110	107	105	103	103	101	100	100	98	97	96	95	94	92	92	92	92
2	106	101	96	92	104	99	95	91	96	92	89	92	90	87	90	87	85	84	84	84	84
3	100	92	87	82	98	91	86	81	88	84	80	86	82	79	83	80	78	76	76	76	76
4	94	85	79	74	92	84	78	73	81	76	72	79	75	71	77	74	71	69	69	69	69
5	88	78	72	67	86	77	71	66	75	70	66	74	69	65	72	68	64	63	63	63	63
6	83	72	65	61	81	71	65	60	70	64	60	68	63	59	67	62	59	57	57	57	57
7	78	67	60	55	76	66	60	55	65	59	55	64	58	54	62	58	54	53	53	53	53
8	73	62	55	51	72	62	55	51	60	55	50	59	54	50	58	53	50	48	48	48	48
9	69	58	51	47	68	57	51	47	56	51	46	55	50	46	55	50	46	45	45	45	45
10	65	54	48	43	64	54	47	43	53	47	43	52	47	43	51	46	43	41	41	41	41

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	51841
5°	51634
10°	51013
15°	50253
20°	49321
25°	48159
30°	45786
35°	40359
40°	30245
45°	18789
50°	10721
55°	5753
60°	2795
65°	1177
70°	577
75°	397
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 18789 cd/sqm



TEST NUMBER: P643481

CATALOG NUMBER: ML5615LSVWFL9FS1E - 593TBZB - 1200LM - 2700K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	61.7	6.6
10°-20°	173.3	18.7
20°-30°	253.3	27.3
30°-40°	255.7	27.5
40°-50°	134.9	14.5
50°-60°	40.4	4.4
60°-70°	7.7	0.8
70°-80°	1.4	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	488.3	52.6
0°-40°	743.9	80.1
0°-60°	919.2	99.0
0°-90°	928.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	928.3	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	657	
5°	652	62
15°	615	173
25°	553	253
35°	419	256
45°	168	135
55°	42	40
65°	6	8
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P643481

CATALOG NUMBER: ML5615LSVWFL9FS1E - 593TBZB - 1200LM - 2700K

CANDELA DISTRIBUTION (FULL):

	0°
0°	656.7
2.5°	655.4
5°	651.6
7.5°	645.3
10°	636.4
12.5°	626.3
15°	614.9
17.5°	602.3
20°	587.1
22.5°	570.6
25°	552.9
27.5°	530.2
30°	502.3
32.5°	466.9
35°	418.8
37.5°	360.6
40°	293.5
42.5°	226.5
45°	168.3
47.5°	122.7
50°	87.3
52.5°	60.7
55°	41.8
57.5°	27.8
60°	17.7
62.5°	11.4
65°	6.3
67.5°	3.8
70°	2.5
72.5°	1.3
75°	1.3
77.5°	1.3
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)