

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P643486

Luminaire Tested: ML5615LSVWFL9FS1E - 593TBZB - 1500LM - 2700K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P643486
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-100)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5615LSVWFL9FS1E - 593TBZB - 1500LM - 2700K
Description: ML56 RR, MILKY OPTIC, 5" TUSCON BRONZE BAFFLE TRIM
Light Source: (1) STANDARD SELECTABLE LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1141.4 lumens
Efficiency: N/A
Efficacy: 66.7 lumens/watt
Spacing Criteria (0/90/45): 1.15 / 1.15 / 1.12
Luminous Opening: Circular (Dia: 0.42' x H: 0')
CIE Type: Direct


Input Watts (W): 17.1
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P643486

CATALOG NUMBER: ML5615LSVWFL9FS1E - 593TBZB - 1500LM - 2700K

Luminous Intensity Polar Plot

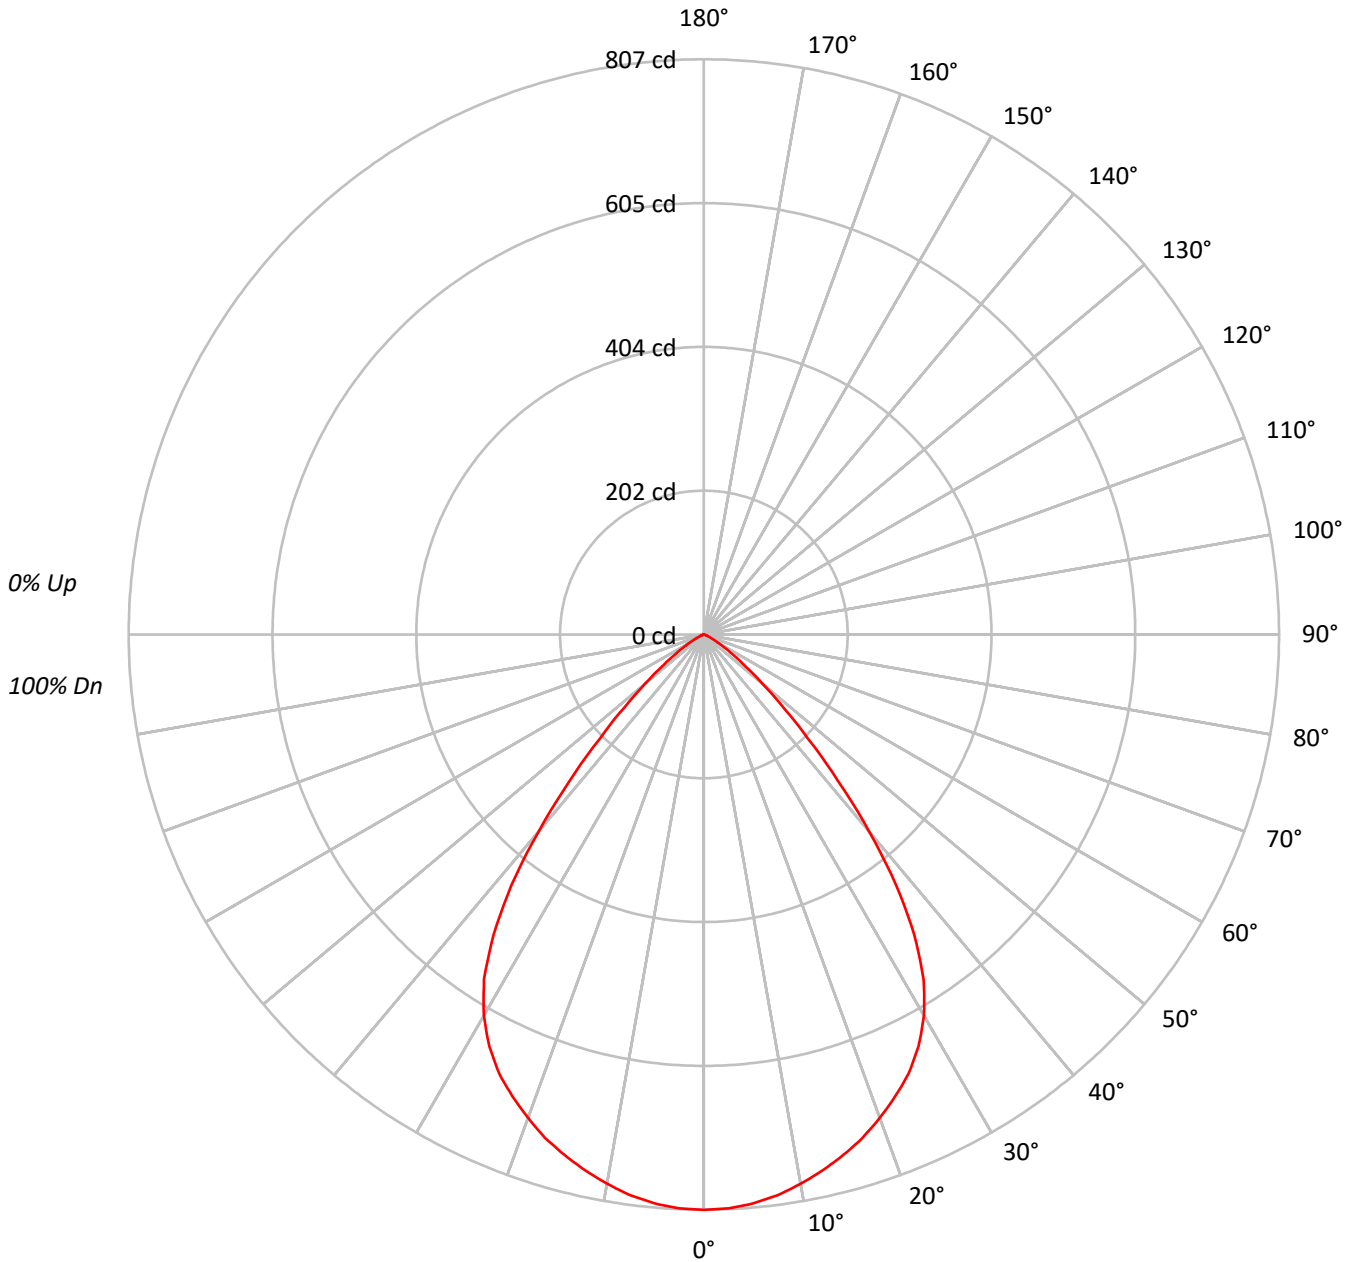



TEST NUMBER: P643486

CATALOG NUMBER: ML5615LSVWFL9FS1E - 593TBZB - 1500LM - 2700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100															
1	113	110	107	104	110	107	105	103	103	101	100	100	98	97	96	95	94	92				92															
2	106	101	96	92	104	99	95	91	96	92	89	92	90	87	90	87	85	84				84															
3	100	92	87	82	98	91	86	81	88	84	80	86	82	79	83	80	78	76				76															
4	94	85	79	74	92	84	78	73	81	76	72	79	75	71	77	74	71	69				69															
5	88	78	72	67	86	77	71	66	75	70	66	74	69	65	72	68	64	63				63															
6	83	72	65	61	81	71	65	60	70	64	60	68	63	59	67	62	59	57				57															
7	78	67	60	55	76	66	60	55	65	59	55	64	58	54	62	58	54	53				53															
8	73	62	55	51	72	62	55	51	60	55	50	59	54	50	58	53	50	48				48															
9	69	58	51	47	68	57	51	47	56	51	46	55	50	46	55	50	46	45				45															
10	65	54	48	43	64	54	47	43	53	47	43	52	47	43	51	46	43	41				41															

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	63737
5°	63481
10°	62724
15°	61785
20°	60636
25°	59212
30°	56296
35°	49620
40°	37191
45°	23098
50°	13178
55°	7060
60°	3442
65°	1457
70°	716
75°	488
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 23098 cd/sqm



TEST NUMBER: P643486

CATALOG NUMBER: ML5615LSVWFL9FS1E - 593TBZB - 1500LM - 2700K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	75.9	6.6
10°-20°	213.1	18.7
20°-30°	311.4	27.3
30°-40°	314.3	27.5
40°-50°	165.8	14.5
50°-60°	49.7	4.4
60°-70°	9.5	0.8
70°-80°	1.7	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	600.3	52.6
0°-40°	914.6	80.1
0°-60°	1130.1	99.0
0°-90°	1141.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1141.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	807	
5°	801	76
15°	756	213
25°	680	311
35°	515	314
45°	207	166
55°	51	50
65°	8	10
75°	2	2
85°	0	0
90°	0	



TEST NUMBER: P643486

CATALOG NUMBER: ML5615LSVWFL9FS1E - 593TBZB - 1500LM - 2700K

CANDELA DISTRIBUTION (FULL):

	0°
0°	807.4
2.5°	805.8
5°	801.1
7.5°	793.4
10°	782.5
12.5°	770.0
15°	756.0
17.5°	740.5
20°	721.8
22.5°	701.6
25°	679.8
27.5°	651.8
30°	617.6
32.5°	574.0
35°	514.9
37.5°	443.3
40°	360.9
42.5°	278.5
45°	206.9
47.5°	150.9
50°	107.3
52.5°	74.7
55°	51.3
57.5°	34.2
60°	21.8
62.5°	14.0
65°	7.8
67.5°	4.7
70°	3.1
72.5°	1.6
75°	1.6
77.5°	1.6
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)