

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P643515

Luminaire Tested: ML5615LSVWFL9FS1E - 594SNB - 1200LM - 5000K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P643515
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-102)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5615LSVWFL9FS1E - 594SNB - 1200LM - 5000K
Description: ML56 RR, MILKY OPTIC, 5" SATIN NICKLE GIMBAL TRIM
Light Source: (1) STANDARD SELECTABLE LUMEN LED 90CRI / 5000K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1552.0 lumens
Efficiency: N/A
Efficacy: 115.8 lumens/watt
Spacing Criteria (0/90/45): 1.19 / 1.19 / 1.26
Luminous Opening: Circular (Dia: 0.42' x H: 0')
CIE Type: Direct

Input Watts (W): 13.4
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P643515
CATALOG NUMBER: ML5615LSVWFL9FS1E - 594SNB - 1200LM - 5000K

Luminous Intensity Polar Plot

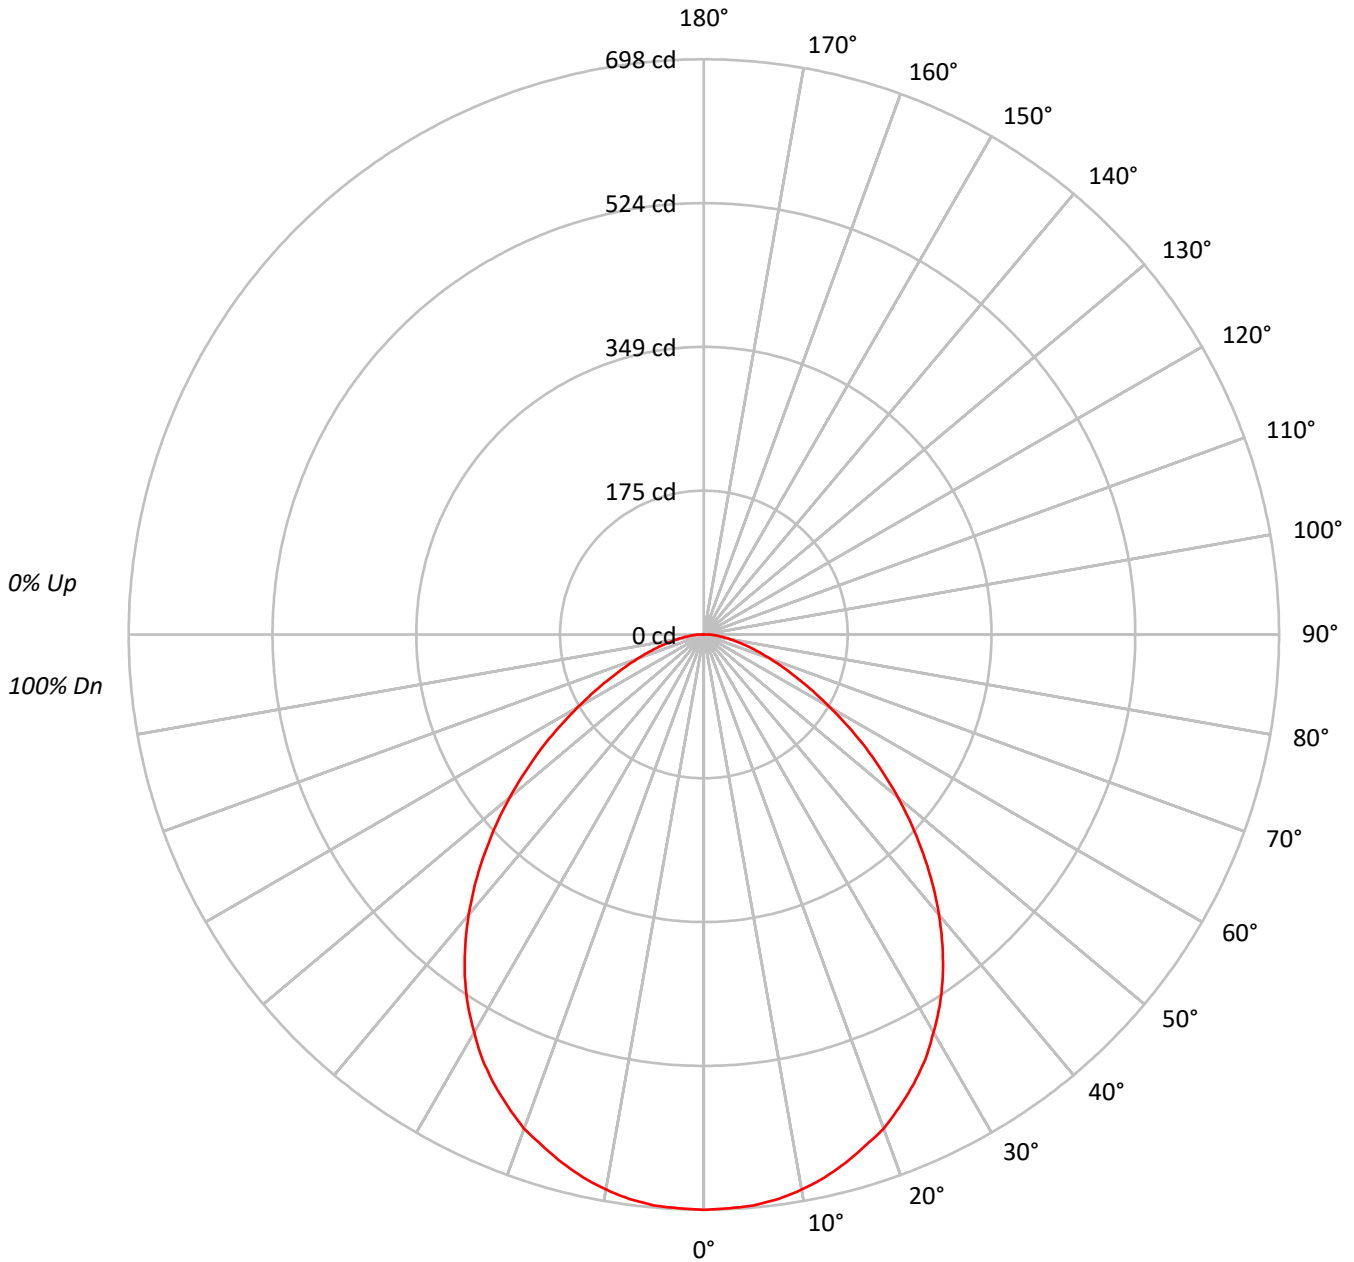



TEST NUMBER: P643515

CATALOG NUMBER: ML5615LSVWFL9FS1E - 594SNB - 1200LM - 5000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100	
1	110	106	102	99	108	104	100	97	100	97	94	96	93	91	92	90	89	87			87	
2	101	94	88	83	99	92	87	82	89	84	80	85	82	78	83	79	76	74			74	
3	93	84	76	70	91	82	75	70	79	73	69	77	72	67	74	70	66	64			64	
4	86	75	67	61	84	74	66	60	71	65	60	69	63	59	67	62	58	56			56	
5	80	68	59	53	78	67	59	53	65	58	52	63	57	52	61	56	51	49			49	
6	74	61	53	47	72	60	53	47	59	52	46	57	51	46	56	50	46	44			44	
7	69	56	48	42	67	55	47	42	54	47	42	52	46	41	51	45	41	39			39	
8	64	51	43	38	63	51	43	38	49	42	37	48	42	37	47	41	37	35			35	
9	60	47	39	34	59	47	39	34	46	39	34	45	38	34	44	38	34	32			32	
10	56	44	36	31	55	43	36	31	42	36	31	41	35	31	41	35	31	29			29	

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	55124
5°	55113
10°	54829
15°	54249
20°	53597
25°	52444
30°	50818
35°	48743
40°	45754
45°	42032
50°	37764
55°	33031
60°	27898
65°	23349
70°	19573
75°	16653
80°	14365
85°	14311

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 42032 cd/sqm



TEST NUMBER: P643515

CATALOG NUMBER: ML5615LSVWFL9FS1E - 594SNB - 1200LM - 5000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	66.0	4.3
10°-20°	187.2	12.1
20°-30°	276.9	17.8
30°-40°	315.1	20.3
40°-50°	290.0	18.7
50°-60°	214.6	13.8
60°-70°	125.6	8.1
70°-80°	58.9	3.8
80°-90°	17.6	1.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	530.1	34.2
0°-40°	845.2	54.5
0°-60°	1349.9	87.0
0°-90°	1552.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1552.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	698	
5°	696	66
15°	664	187
25°	602	277
35°	506	315
45°	376	290
55°	240	215
65°	125	126
75°	55	59
85°	16	18
90°	0	



TEST NUMBER: P643515

CATALOG NUMBER: ML5615LSVWFL9FS1E - 594SNB - 1200LM - 5000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	698.3
2.5°	696.9
5°	695.5
7.5°	691.1
10°	684.0
12.5°	675.3
15°	663.8
17.5°	650.9
20°	638.0
22.5°	620.7
25°	602.1
27.5°	581.9
30°	557.5
32.5°	533.1
35°	505.8
37.5°	475.6
40°	444.0
42.5°	411.0
45°	376.5
47.5°	342.0
50°	307.5
52.5°	273.0
55°	240.0
57.5°	206.9
60°	176.7
62.5°	149.4
65°	125.0
67.5°	103.5
70°	84.8
72.5°	69.0
75°	54.6
77.5°	41.7
80°	31.6
82.5°	23.0
85°	15.8
87.5°	10.1
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)