

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P643558

Luminaire Tested: ML5615LSVWFL9FS1E - 596WB - 1200LM - 3500K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P643558
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-104)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5615LSVWFL9FS1E - 596WB - 1200LM - 3500K
Description: ML56 RR, MILKY OPTIC, 5" SHALLOW WHITE BAFFLE TRIM
Light Source: (1) STANDARD SELECTABLE LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1360.4 lumens
Efficiency: N/A
Efficacy: 101.5 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.2 / 1.24
Luminous Opening: Circular (Dia: 0.42' x H: 0')
CIE Type: Direct

Input Watts (W): 13.4
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P643558
CATALOG NUMBER: ML5615LSVWFL9FS1E - 596WB - 1200LM - 3500K

Luminous Intensity Polar Plot

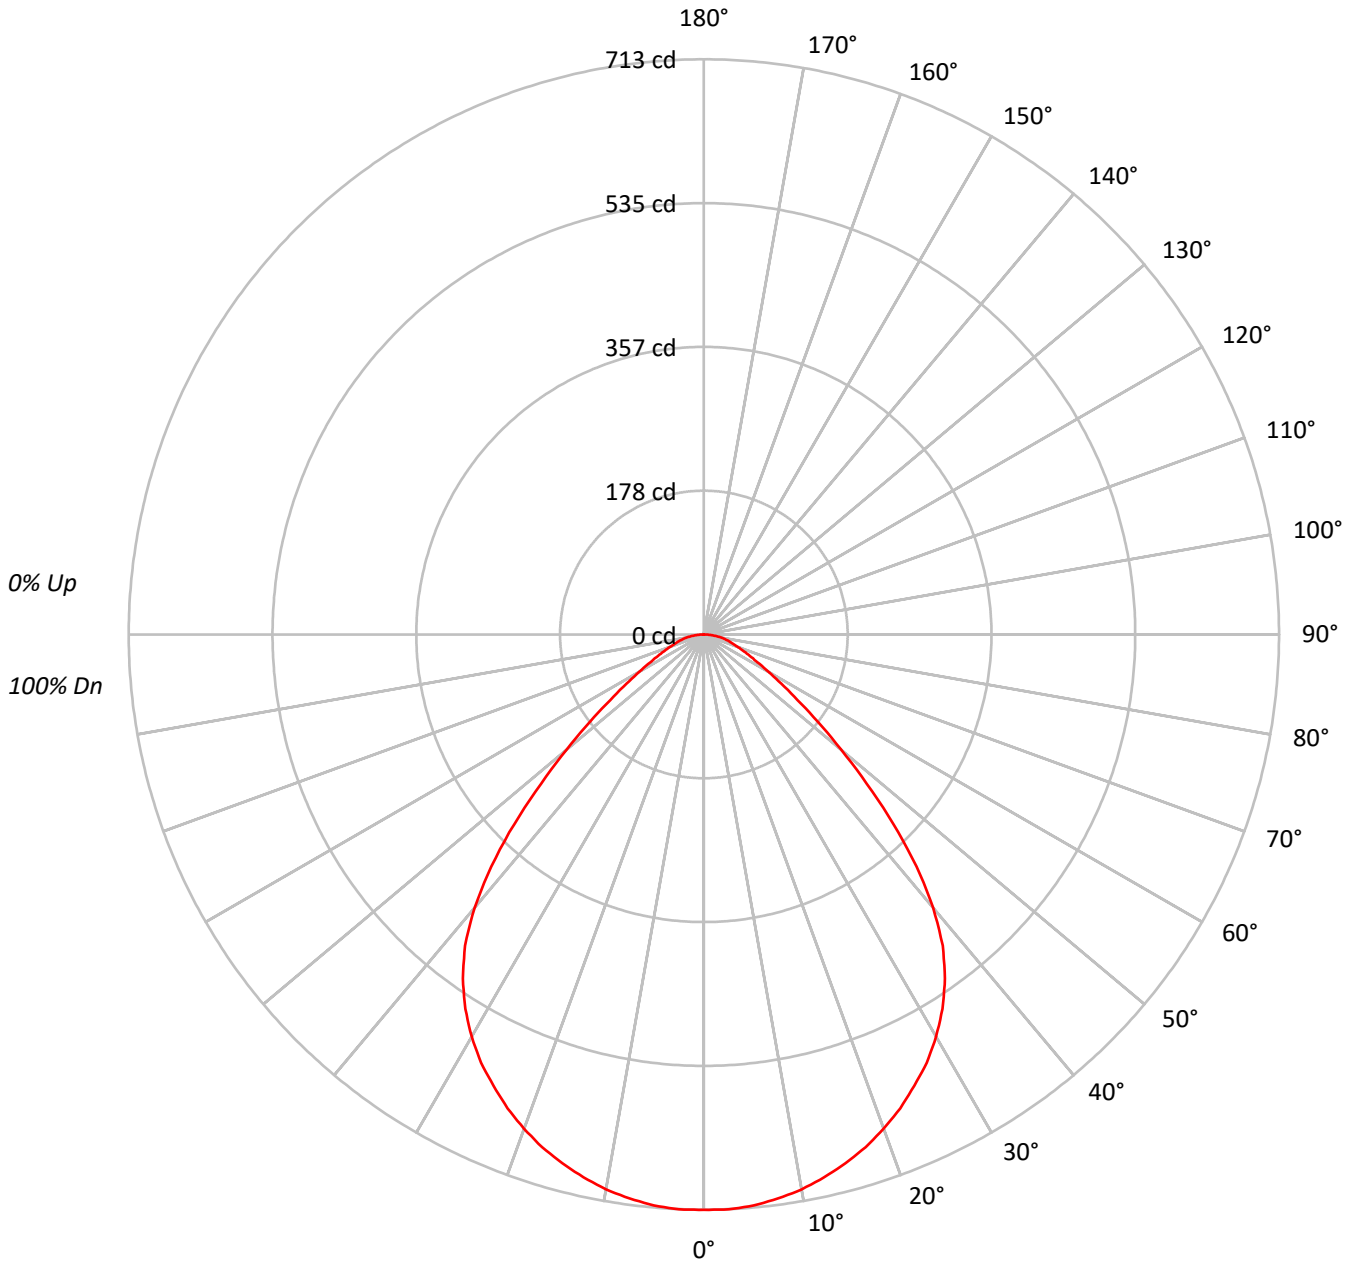



TEST NUMBER: P643558

CATALOG NUMBER: ML5615LSVWFL9FS1E - 596WB - 1200LM - 3500K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	111	107	104	101	109	105	102	99	101	98	96	97	95	93	94	92	91	89																			
2	103	96	91	86	101	95	90	85	91	87	83	88	85	82	85	82	80	78																			
3	96	87	80	75	93	85	79	74	83	77	73	80	76	72	78	74	71	69																			
4	89	79	71	66	87	77	71	65	75	69	64	73	68	64	71	66	63	61																			
5	83	72	64	58	81	71	63	58	69	62	57	67	61	57	65	60	56	54																			
6	77	65	58	52	75	64	57	52	63	56	51	61	55	51	60	55	51	49																			
7	72	60	52	47	70	59	52	47	58	51	46	56	50	46	55	50	46	44																			
8	67	55	48	42	66	55	47	42	53	47	42	52	46	42	51	46	42	40																			
9	63	51	44	39	62	50	43	39	49	43	38	48	42	38	47	42	38	36																			
10	59	47	40	35	58	47	40	35	46	40	35	45	39	35	44	39	35	33																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	56301
5°	56302
10°	55991
15°	55451
20°	54756
25°	53750
30°	52468
35°	50199
40°	45558
45°	37131
50°	27227
55°	19488
60°	14557
65°	11730
70°	10179
75°	9791
80°	9728
85°	8423

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 37131 cd/sqm



TEST NUMBER: P643558

CATALOG NUMBER: ML5615LSVWFL9FS1E - 596WB - 1200LM - 3500K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	67.4	5.0
10°-20°	191.3	14.1
20°-30°	284.2	20.9
30°-40°	322.9	23.7
40°-50°	254.8	18.7
50°-60°	131.1	9.6
60°-70°	63.7	4.7
70°-80°	34.0	2.5
80°-90°	10.9	0.8
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	543.0	39.9
0°-40°	865.9	63.6
0°-60°	1251.8	92.0
0°-90°	1360.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1360.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	713	
5°	710	67
15°	678	191
25°	617	284
35°	521	323
45°	333	255
55°	142	131
65°	63	64
75°	32	34
85°	9	11
90°	0	



TEST NUMBER: P643558

CATALOG NUMBER: ML5615LSVWFL9FS1E - 596WB - 1200LM - 3500K

CANDELA DISTRIBUTION (FULL):

	0°
0°	713.2
2.5°	713.2
5°	710.5
7.5°	705.2
10°	698.5
12.5°	689.2
15°	678.5
17.5°	666.5
20°	651.8
22.5°	635.8
25°	617.1
27.5°	598.4
30°	575.6
32.5°	550.3
35°	520.9
37.5°	486.2
40°	442.1
42.5°	390.0
45°	332.6
47.5°	273.8
50°	221.7
52.5°	177.6
55°	141.6
57.5°	113.5
60°	92.2
62.5°	74.8
65°	62.8
67.5°	52.1
70°	44.1
72.5°	37.4
75°	32.1
77.5°	26.7
80°	21.4
82.5°	16.0
85°	9.3
87.5°	4.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)