

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P643567

Luminaire Tested: ML5615LSVWFL9FS1E - 596WB - 900LM - 3000K

Issue Date: 2/17/2023

**Test Information**

Test Method: LM-79-2019  
Report Number: P643567  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-104)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/17/2023  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: HALO  
Catalog Number: ML5615LSVWFL9FS1E - 596WB - 900LM - 3000K  
Description: ML56 RR, MILKY OPTIC, 5" SHALLOW WHITE BAFFLE TRIM  
Light Source: (1) STANDARD SELECTABLE LUMEN LED 90CRI / 3000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1047.1 lumens  
Efficiency: N/A  
Efficacy: 99.7 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.2 / 1.24  
Luminous Opening: Circular (Dia: 0.42' x H: 0')  
CIE Type: Direct


Input Watts (W): 10.5  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



TEST NUMBER: P643567

CATALOG NUMBER: ML5615LSVWFL9FS1E - 596WB - 900LM - 3000K

### Luminous Intensity Polar Plot

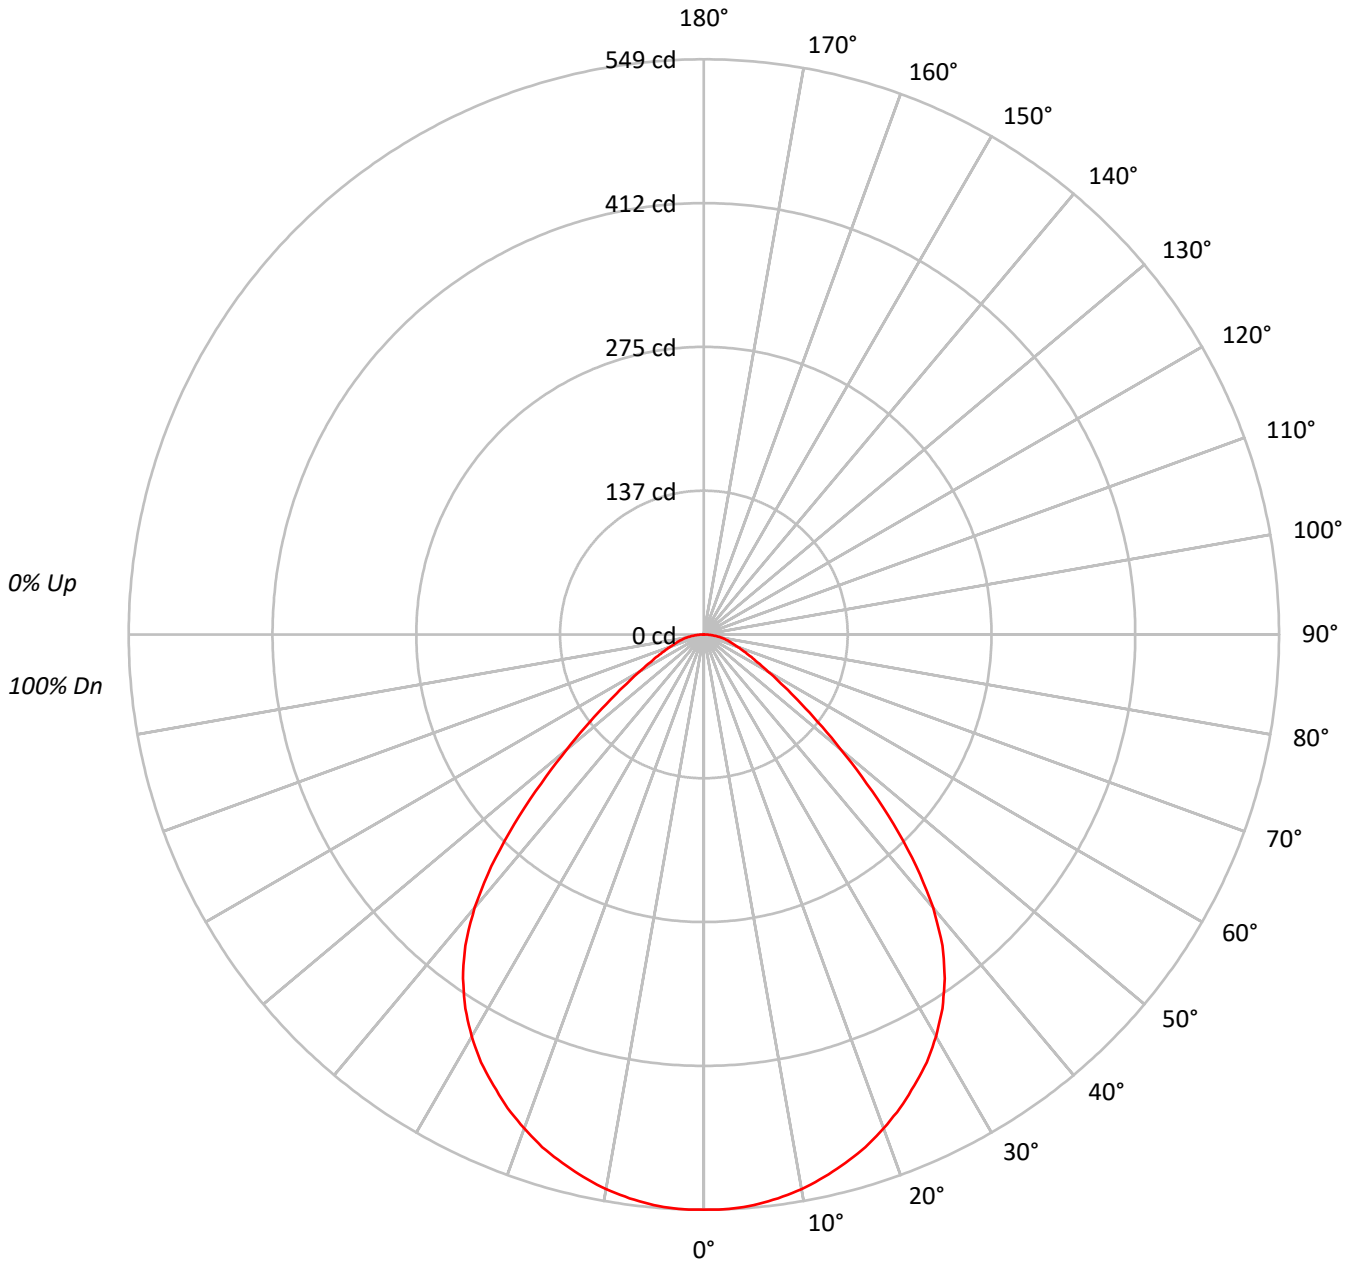



TEST NUMBER: P643567

CATALOG NUMBER: ML5615LSVWFL9FS1E - 596WB - 900LM - 3000K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	111	107	104	101	109	105	102	99	101	98	96	97	95	93	94	92	91	89																			
2	103	96	91	86	101	95	90	85	91	87	83	88	85	82	85	82	80	78																			
3	96	87	80	75	93	85	79	74	83	77	73	80	76	72	78	74	71	69																			
4	89	79	71	66	87	77	71	65	75	69	64	73	68	64	71	66	63	61																			
5	83	72	64	58	81	71	63	58	69	62	57	67	61	57	65	60	56	54																			
6	77	65	58	52	75	64	57	52	63	56	51	61	55	51	60	55	51	49																			
7	72	60	52	47	70	59	52	47	58	51	46	56	50	46	55	50	46	44																			
8	67	55	48	42	66	55	47	42	53	47	42	52	46	42	51	46	42	40																			
9	63	51	44	39	62	50	43	39	49	43	38	48	42	38	47	42	38	36																			
10	59	47	40	35	58	47	40	35	46	40	35	45	39	35	44	39	35	33																			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	43339
5°	43338
10°	43101
15°	42677
20°	42146
25°	41373
30°	40390
35°	38634
40°	35068
45°	28580
50°	20964
55°	15002
60°	11194
65°	9022
70°	7824
75°	7534
80°	7455
85°	6521

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 28580 cd/sqm



TEST NUMBER: P643567

CATALOG NUMBER: ML5615LSVWFL9FS1E - 596WB - 900LM - 3000K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	51.9	5.0
10°-20°	147.3	14.1
20°-30°	218.8	20.9
30°-40°	248.5	23.7
40°-50°	196.1	18.7
50°-60°	101.0	9.6
60°-70°	49.0	4.7
70°-80°	26.2	2.5
80°-90°	8.4	0.8
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	417.9	39.9
0°-40°	666.5	63.6
0°-60°	963.5	92.0
0°-90°	1047.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1047.1	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	549	
5°	547	52
15°	522	147
25°	475	219
35°	401	249
45°	256	196
55°	109	101
65°	48	49
75°	25	26
85°	7	8
90°	0	



TEST NUMBER: P643567

CATALOG NUMBER: ML5615LSVWFL9FS1E - 596WB - 900LM - 3000K

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	549.0
2.5°	549.0
5°	546.9
7.5°	542.8
10°	537.7
12.5°	530.5
15°	522.2
17.5°	513.0
20°	501.7
22.5°	489.3
25°	475.0
27.5°	460.6
30°	443.1
32.5°	423.6
35°	400.9
37.5°	374.2
40°	340.3
42.5°	300.2
45°	256.0
47.5°	210.7
50°	170.7
52.5°	136.7
55°	109.0
57.5°	87.4
60°	70.9
62.5°	57.6
65°	48.3
67.5°	40.1
70°	33.9
72.5°	28.8
75°	24.7
77.5°	20.6
80°	16.4
82.5°	12.3
85°	7.2
87.5°	3.1
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)