

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P643607

Luminaire Tested: ML5615LSVWFL9FS1E - 692SC - 1500LM - 3000K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P643607
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-106)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5615LSVWFL9FS1E - 692SC - 1500LM - 3000K
Description: ML56 RR, MILKY OPTIC, 6" SPECULAR CLEAR TRIM
Light Source: (1) STANDARD SELECTABLE LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1656.9 lumens
Efficiency: N/A
Efficacy: 96.9 lumens/watt
Spacing Criteria (0/90/45): 0.54 / 0.54 / 0.69
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct

Input Watts (W): 17.1
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P643607
CATALOG NUMBER: ML5615LSVWFL9FS1E - 692SC - 1500LM - 3000K

Luminous Intensity Polar Plot

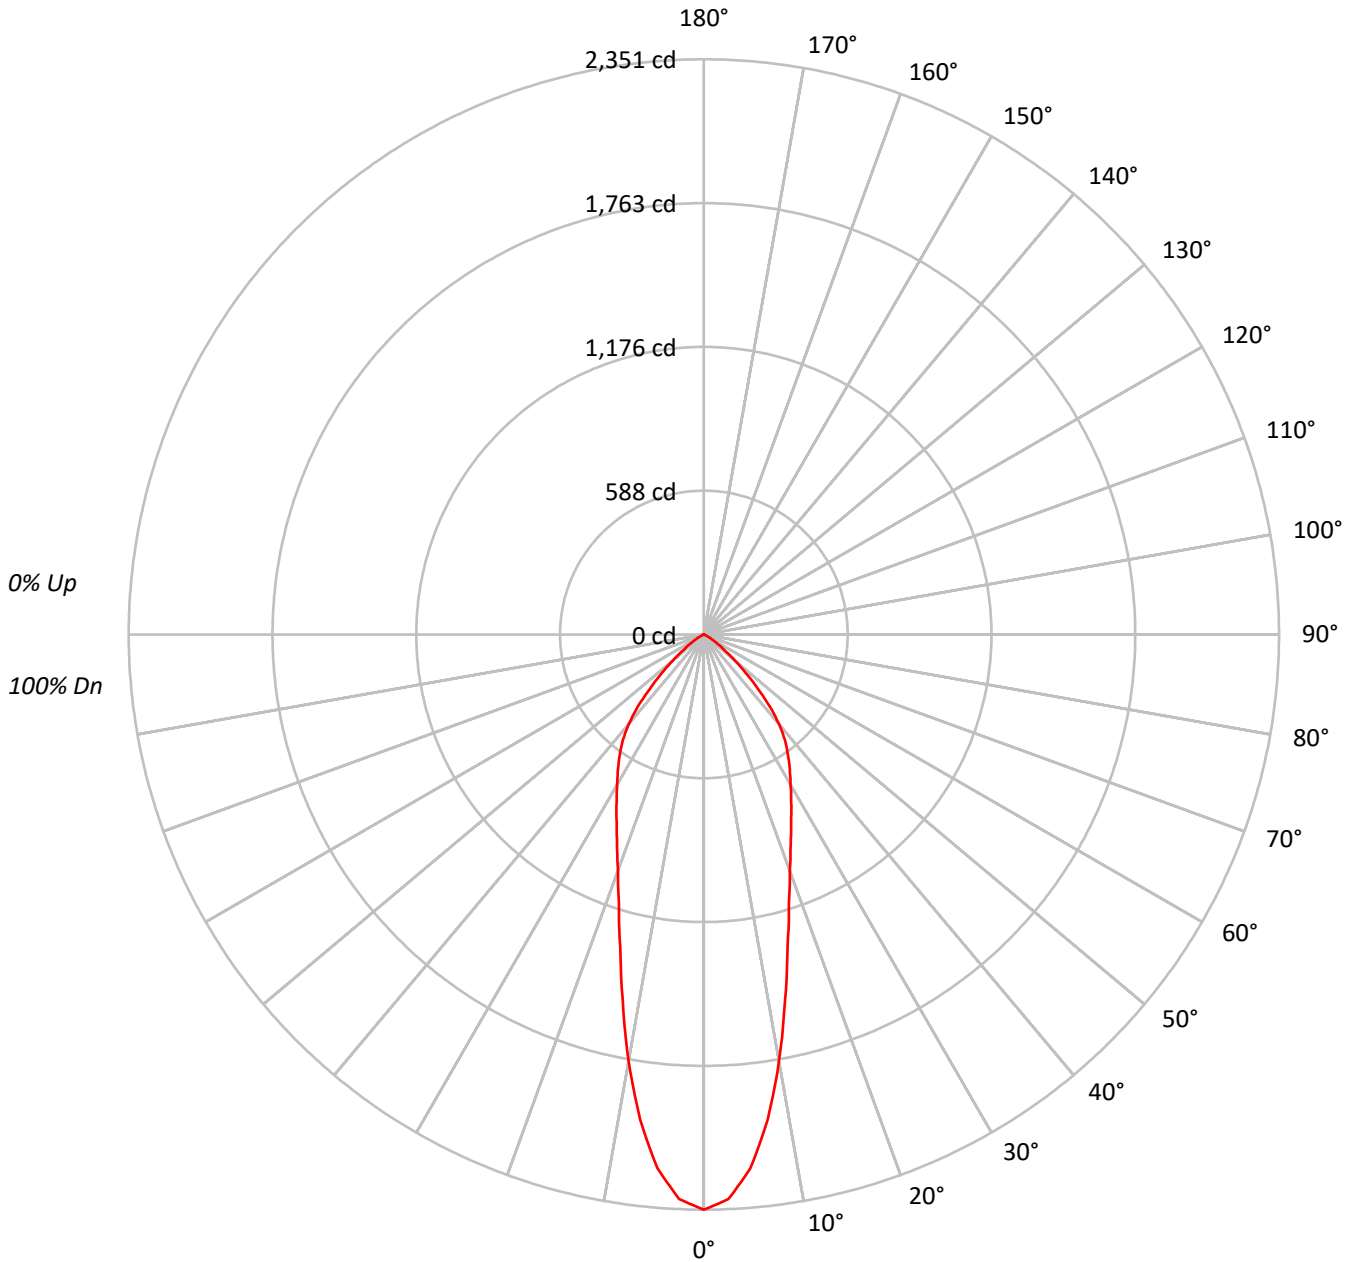



TEST NUMBER: P643607

CATALOG NUMBER: ML5615LSVWFL9FS1E - 692SC - 1500LM - 3000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100																
1	113	110	107	105	111	108	106	103	104	102	100	100	99	97	97	95	94	93			93																
2	107	102	97	93	105	100	96	92	97	93	90	93	91	88	91	89	87	85			85																
3	101	94	88	84	99	92	87	83	90	85	82	87	84	81	85	82	79	78			78																
4	95	87	81	76	93	86	80	76	83	79	75	81	77	74	79	76	73	71			71																
5	90	81	74	70	88	80	74	69	78	73	69	76	72	68	74	71	67	66			66																
6	85	75	69	64	83	74	68	64	73	67	63	71	66	63	70	66	62	61			61																
7	80	70	64	59	79	69	63	59	68	63	59	67	62	58	66	61	58	56			56																
8	76	66	59	55	75	65	59	55	64	58	54	63	58	54	62	57	54	52			52																
9	72	62	55	51	71	61	55	51	60	55	51	59	54	51	58	54	50	49			49																
10	68	58	52	48	67	58	52	48	57	51	48	56	51	47	55	51	47	46			46																

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	128888
5°	120482
10°	98534
15°	74938
20°	59849
25°	51015
30°	44880
35°	40060
40°	34128
45°	24072
50°	14055
55°	7340
60°	3333
65°	1038
70°	256
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 24072 cd/sqm



TEST NUMBER: P643607

CATALOG NUMBER: ML5615LSVWFL9FS1E - 692SC - 1500LM - 3000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	195.4	11.8
10°-20°	372.3	22.5
20°-30°	390.4	23.6
30°-40°	372.4	22.5
40°-50°	240.3	14.5
50°-60°	74.6	4.5
60°-70°	10.9	0.7
70°-80°	0.6	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	958.0	57.8
0°-40°	1330.4	80.3
0°-60°	1645.3	99.3
0°-90°	1656.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1656.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2351	
5°	2189	195
15°	1320	372
25°	843	390
35°	599	372
45°	310	240
55°	77	75
65°	8	11
75°	0	1
85°	0	0
90°	0	



TEST NUMBER: P643607

CATALOG NUMBER: ML5615LSVWFL9FS1E - 692SC - 1500LM - 3000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	2351.1
2.5°	2309.5
5°	2189.4
7.5°	1999.0
10°	1770.1
12.5°	1531.6
15°	1320.4
17.5°	1155.5
20°	1025.9
22.5°	926.7
25°	843.4
27.5°	773.0
30°	709.0
32.5°	653.0
35°	598.6
37.5°	544.2
40°	476.9
42.5°	396.9
45°	310.5
47.5°	230.5
50°	164.8
52.5°	113.6
55°	76.8
57.5°	49.6
60°	30.4
62.5°	17.6
65°	8.0
67.5°	3.2
70°	1.6
72.5°	1.6
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)