

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P643634

Luminaire Tested: ML5615LSVWFL9FS1E - 693BB - 1200LM - 4000K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P643634
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-110)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5615LSVWFL9FS1E - 693BB - 1200LM - 4000K
Description: ML56 RR, MILKY OPTIC, 6" BLACK BAFFLE TRIM
Light Source: (1) STANDARD SELECTABLE LUMEN LED 90CRI / 4000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1114.6 lumens
Efficiency: N/A
Efficacy: 83.2 lumens/watt
Spacing Criteria (0/90/45): 1.19 / 1.19 / 1.21
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct


Input Watts (W): 13.4
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P643634

CATALOG NUMBER: ML5615LSVWFL9FS1E - 693BB - 1200LM - 4000K

Luminous Intensity Polar Plot

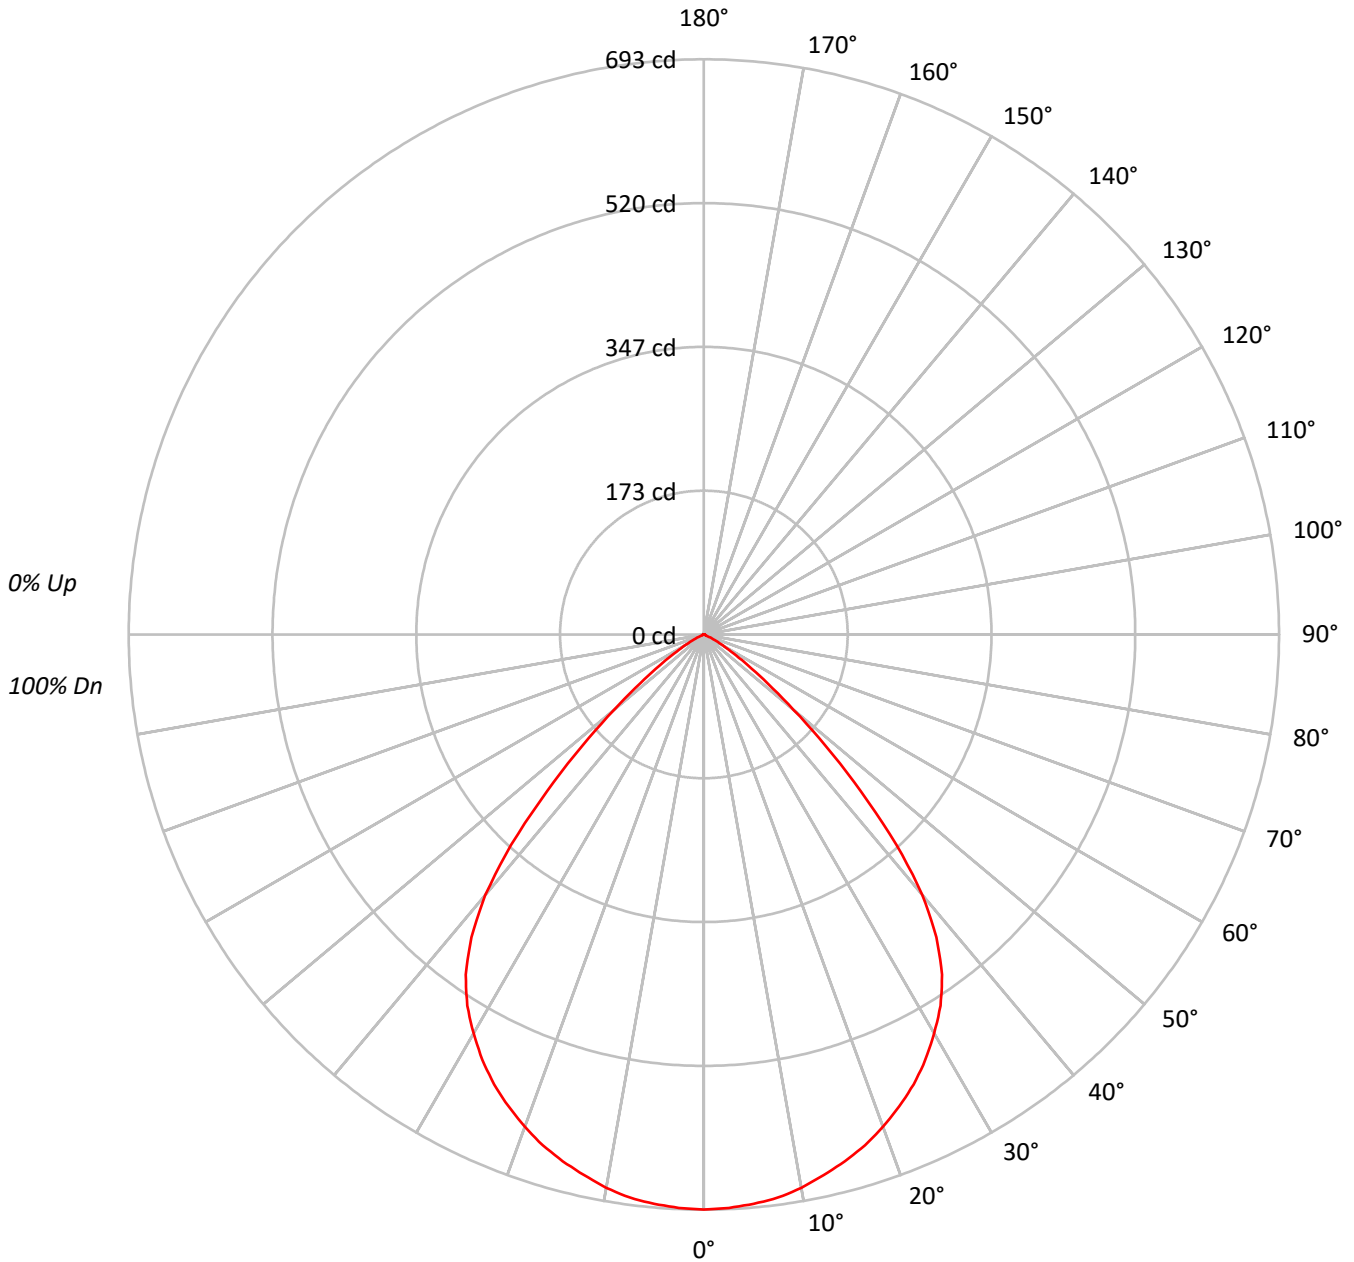



TEST NUMBER: P643634

CATALOG NUMBER: ML5615LSVWFL9FS1E - 693BB - 1200LM - 4000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	112	109	106	104	110	107	105	102	103	101	99	99	98	96	96	94	93	91			91
2	106	100	95	91	103	98	94	90	95	91	88	92	89	86	89	86	84	83			83
3	99	91	85	81	97	90	84	80	87	82	79	84	81	77	82	79	76	74			74
4	92	83	77	72	90	82	76	71	80	75	70	78	73	70	76	72	69	67			67
5	86	77	70	64	85	76	69	64	74	68	63	72	67	63	70	66	62	61			61
6	81	70	63	58	79	70	63	58	68	62	57	66	61	57	65	60	57	55			55
7	76	65	58	53	74	64	57	53	63	57	52	61	56	52	60	55	52	50			50
8	71	60	53	48	70	59	53	48	58	52	48	57	52	48	56	51	47	46			46
9	67	56	49	44	66	55	49	44	54	48	44	53	48	44	52	47	43	42			42
10	63	52	45	41	62	51	45	40	50	44	40	50	44	40	49	44	40	39			39

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	37985
5°	37893
10°	37691
15°	37287
20°	36817
25°	36177
30°	35126
35°	33482
40°	29319
45°	20731
50°	12017
55°	6184
60°	2840
65°	934
70°	224
75°	297
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 20731 cd/sqm



TEST NUMBER: P643634

CATALOG NUMBER: ML5615LSVWFL9FS1E - 693BB - 1200LM - 4000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	65.4	5.9
10°-20°	185.3	16.6
20°-30°	274.9	24.7
30°-40°	308.1	27.6
40°-50°	207.1	18.6
50°-60°	63.2	5.7
60°-70°	9.3	0.8
70°-80°	1.3	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	525.5	47.2
0°-40°	833.7	74.8
0°-60°	1103.9	99.0
0°-90°	1114.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1114.6	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	693	
5°	689	65
15°	657	185
25°	598	275
35°	500	308
45°	267	207
55°	65	63
65°	7	9
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P643634

CATALOG NUMBER: ML5615LSVWFL9FS1E - 693BB - 1200LM - 4000K

CANDELA DISTRIBUTION (FULL):

	0°
0°	692.9
2.5°	691.5
5°	688.6
7.5°	684.3
10°	677.1
12.5°	667.1
15°	657.0
17.5°	645.5
20°	631.1
22.5°	615.3
25°	598.1
27.5°	577.9
30°	554.9
32.5°	530.5
35°	500.3
37.5°	460.0
40°	409.7
42.5°	343.6
45°	267.4
47.5°	198.4
50°	140.9
52.5°	96.3
55°	64.7
57.5°	41.7
60°	25.9
62.5°	14.4
65°	7.2
67.5°	2.9
70°	1.4
72.5°	1.4
75°	1.4
77.5°	1.4
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)