

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P643656

Luminaire Tested: ML5615LSVWFL9FS1E - 693SNB - 900LM - 2700K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P643656
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-111)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5615LSVWFL9FS1E - 693SNB - 900LM - 2700K
Description: ML56 RR, MILKY OPTIC, 6" SATIN NICKLE BAFFLE TRIM
Light Source: (1) STANDARD SELECTABLE LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 905.2 lumens
Efficiency: N/A
Efficacy: 86.2 lumens/watt
Spacing Criteria (0/90/45): 1.13 / 1.13 / 1.18
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct


Input Watts (W): 10.5
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P643656

CATALOG NUMBER: ML5615LSVWFL9FS1E - 693SNB - 900LM - 2700K

Luminous Intensity Polar Plot

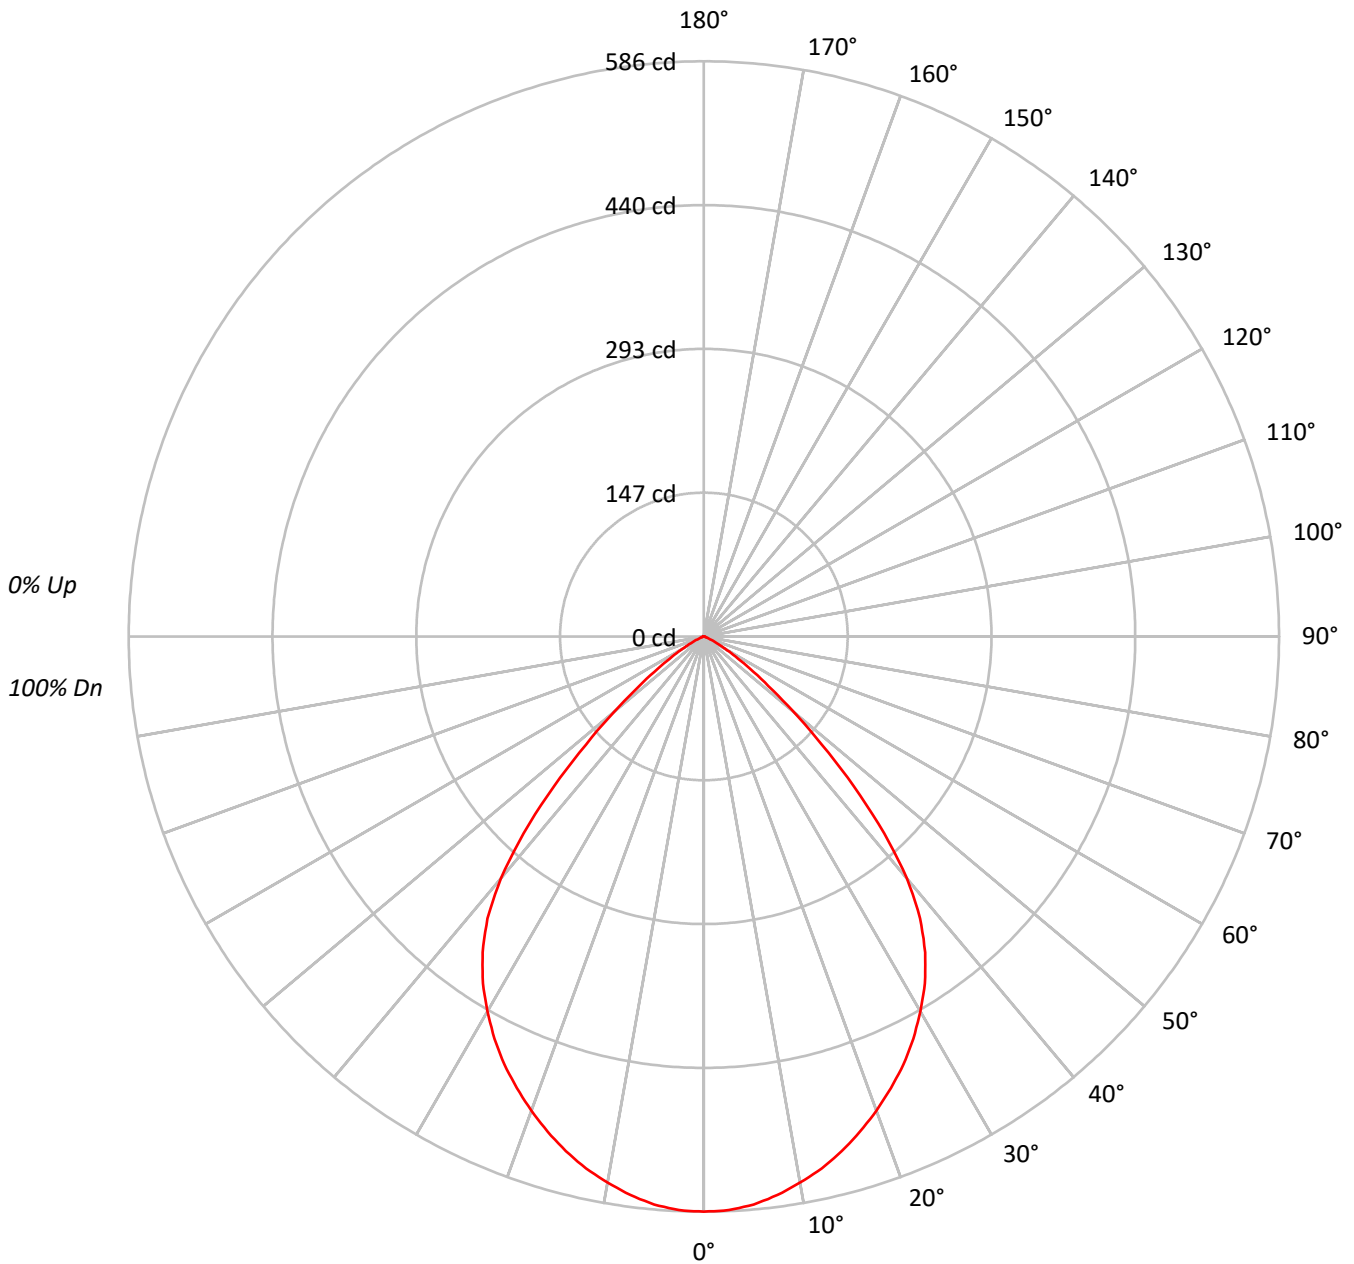



TEST NUMBER: P643656

CATALOG NUMBER: ML5615LSVWFL9FS1E - 693SNB - 900LM - 2700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	112	109	106	104	110	107	104	102	103	101	99	99	98	96	96	94	93	91																			
2	105	100	95	91	103	98	94	90	95	91	88	92	89	86	89	86	84	82																			
3	99	91	85	80	97	90	84	80	87	82	78	84	80	77	82	79	76	74																			
4	92	83	77	72	90	82	76	71	80	75	70	78	73	69	76	72	69	67																			
5	86	76	69	64	85	75	69	64	73	68	63	72	67	63	70	66	62	60																			
6	81	70	63	58	79	69	63	58	68	62	57	66	61	57	65	60	57	55																			
7	76	65	58	53	74	64	57	53	63	57	52	61	56	52	60	55	52	50																			
8	71	60	53	48	70	59	53	48	58	52	48	57	52	47	56	51	47	46																			
9	67	56	49	44	66	55	49	44	54	48	44	53	48	44	52	47	43	42																			
10	63	52	45	41	62	51	45	40	50	44	40	50	44	40	49	44	40	39																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	32125
5°	31972
10°	31451
15°	30817
20°	29986
25°	29094
30°	27916
35°	26301
40°	23043
45°	16746
50°	10064
55°	5448
60°	2741
65°	1167
70°	321
75°	212
80°	316
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 16746 cd/sqm



TEST NUMBER: P643656

CATALOG NUMBER: ML5615LSVWFL9FS1E - 693SNB - 900LM - 2700K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	54.9	6.1
10°-20°	152.8	16.9
20°-30°	221.0	24.4
30°-40°	242.9	26.8
40°-50°	166.4	18.4
50°-60°	55.2	6.1
60°-70°	10.2	1.1
70°-80°	1.4	0.2
80°-90°	0.4	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	428.7	47.4
0°-40°	671.6	74.2
0°-60°	893.2	98.7
0°-90°	905.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	905.2	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	586	
5°	581	55
15°	543	153
25°	481	221
35°	393	243
45°	216	166
55°	57	55
65°	9	10
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P643656

CATALOG NUMBER: ML5615LSVWFL9FS1E - 693SNB - 900LM - 2700K

CANDELA DISTRIBUTION (FULL):

	0°
0°	586
2.5°	585
5°	581
7.5°	574
10°	565
12.5°	555
15°	543
17.5°	529
20°	514
22.5°	498
25°	481
27.5°	462
30°	441
32.5°	419
35°	393
37.5°	362
40°	322
42.5°	272
45°	216
47.5°	163
50°	118
52.5°	83
55°	57
57.5°	38
60°	25
62.5°	15
65°	9
67.5°	4
70°	2
72.5°	2
75°	1
77.5°	1
80°	1
82.5°	1
85°	0
87.5°	0
90°	0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)