

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P643669

Luminaire Tested: ML5615LSVWFL9FS1E - 693TBZB - 1500LM - 4000K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P643669
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-112)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5615LSVWFL9FS1E - 693TBZB - 1500LM - 4000K
Description: ML56 RR, MILKY OPTIC, 6" TUSCON BRONZE BAFFLE TRIM
Light Source: (1) STANDARD SELECTABLE LUMEN LED 90CRI / 4000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1438.4 lumens
Efficiency: N/A
Efficacy: 84.1 lumens/watt
Spacing Criteria (0/90/45): 1.18 / 1.18 / 1.21
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct


Input Watts (W): 17.1
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P643669

CATALOG NUMBER: ML5615LSVWFL9FS1E - 693TBZB - 1500LM - 4000K

Luminous Intensity Polar Plot

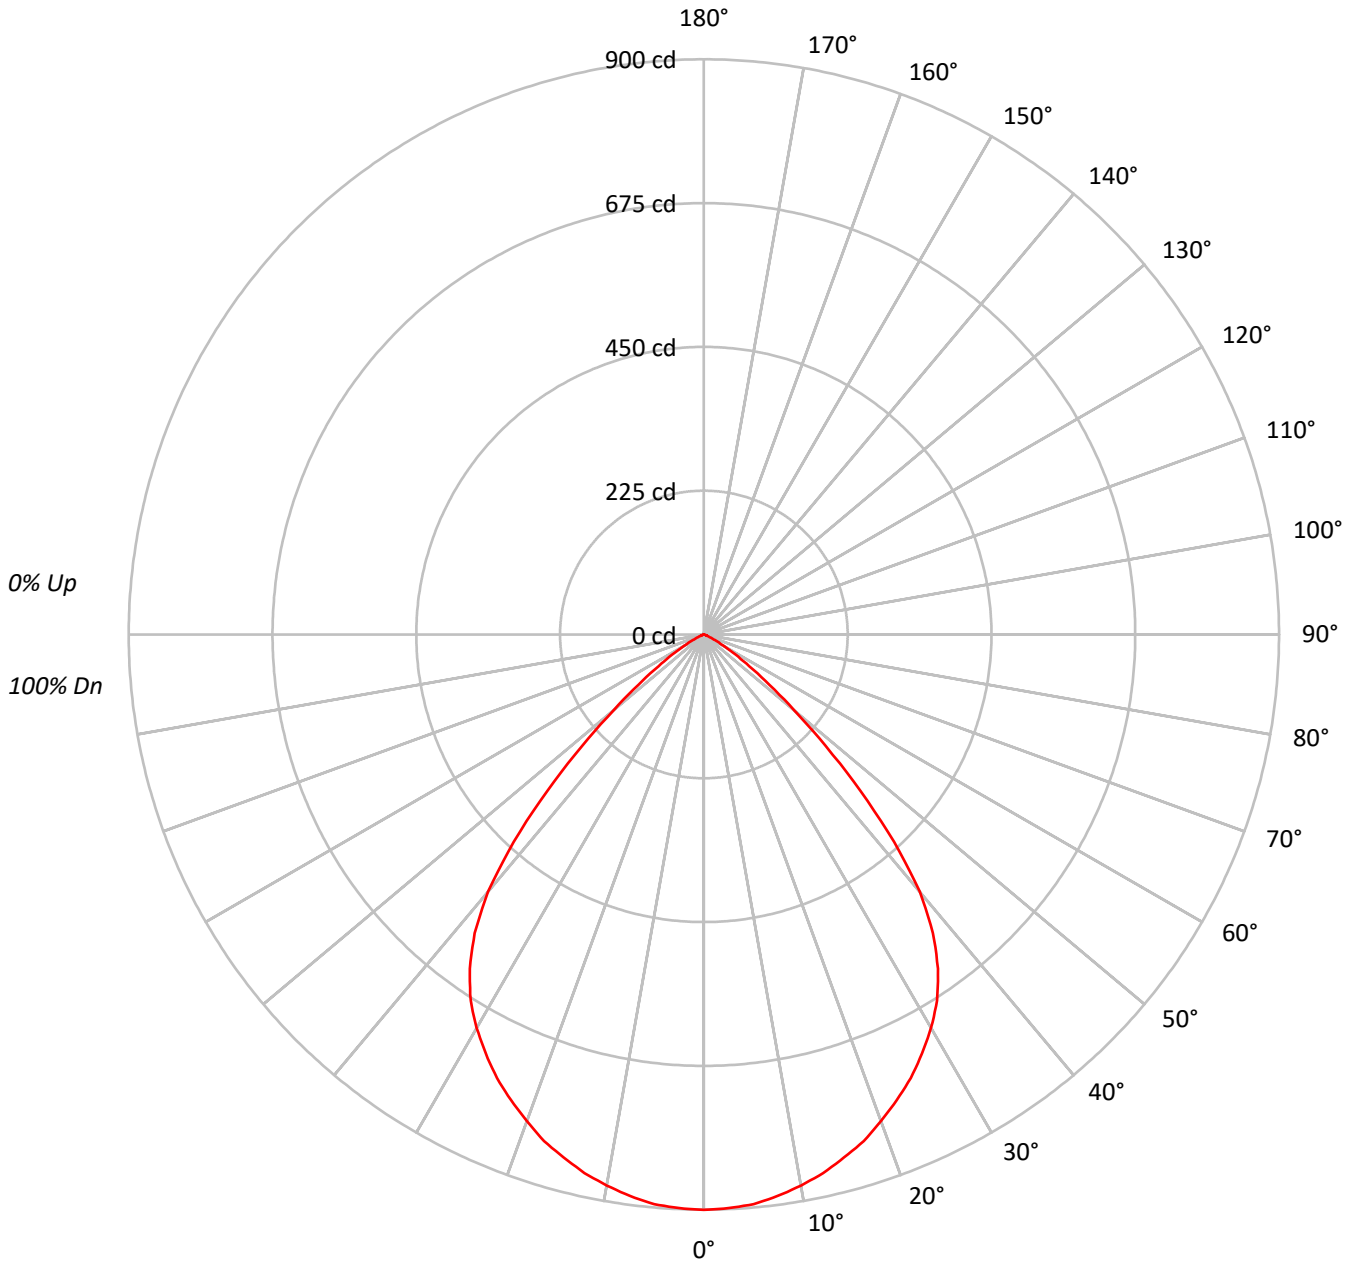



TEST NUMBER: P643669

CATALOG NUMBER: ML5615LSVWFL9FS1E - 693TBZB - 1500LM - 4000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	112	109	106	104	110	107	104	102	103	101	99	99	98	96	96	94	93	91			
2	106	100	95	91	103	98	94	90	95	91	88	92	89	86	89	86	84	82			
3	99	91	85	80	97	90	84	80	87	82	78	84	80	77	82	79	76	74			
4	92	83	77	72	90	82	76	71	80	75	70	78	73	69	76	72	69	67			
5	86	76	69	64	85	75	69	64	73	68	63	72	67	63	70	66	62	60			
6	81	70	63	58	79	69	63	58	68	62	57	66	61	57	65	60	56	55			
7	76	65	58	53	74	64	57	52	63	57	52	61	56	52	60	55	52	50			
8	71	60	53	48	70	59	53	48	58	52	48	57	51	47	56	51	47	46			
9	67	56	49	44	66	55	48	44	54	48	44	53	47	43	52	47	43	42			
10	63	52	45	40	62	51	45	40	50	44	40	49	44	40	49	44	40	38			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	49355
5°	49246
10°	48735
15°	48082
20°	47254
25°	46321
30°	45007
35°	42730
40°	37592
45°	26879
50°	15684
55°	8286
60°	3881
65°	1608
70°	561
75°	381
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 26879 cd/sqm



TEST NUMBER: P643669

CATALOG NUMBER: ML5615LSVWFL9FS1E - 693TBZB - 1500LM - 4000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	84.8	5.9
10°-20°	238.9	16.6
20°-30°	352.1	24.5
30°-40°	394.3	27.4
40°-50°	267.3	18.6
50°-60°	84.8	5.9
60°-70°	14.3	1.0
70°-80°	1.9	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	675.8	47.0
0°-40°	1070.1	74.4
0°-60°	1422.2	98.9
0°-90°	1438.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1438.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	900	
5°	895	85
15°	847	239
25°	766	352
35°	638	394
45°	347	267
55°	87	85
65°	12	14
75°	2	2
85°	0	0
90°	0	



TEST NUMBER: P643669

CATALOG NUMBER: ML5615LSVWFL9FS1E - 693TBZB - 1500LM - 4000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	900.3
2.5°	898.5
5°	894.9
7.5°	886.1
10°	875.5
12.5°	863.1
15°	847.2
17.5°	831.3
20°	810.0
22.5°	788.8
25°	765.8
27.5°	739.3
30°	711.0
32.5°	679.2
35°	638.5
37.5°	589.0
40°	525.3
42.5°	440.4
45°	346.7
47.5°	258.2
50°	183.9
52.5°	129.1
55°	86.7
57.5°	58.4
60°	35.4
62.5°	21.2
65°	12.4
67.5°	5.3
70°	3.5
72.5°	1.8
75°	1.8
77.5°	1.8
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)