

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P643689

Luminaire Tested: ML5615LSVWFL9FS1E - 693WB - 900LM - 4000K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P643689
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-109)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5615LSVWFL9FS1E - 693WB - 900LM - 4000K
Description: ML56 RR, MILKY OPTIC, 6" WHITE BAFFLE TRIM
Light Source: (1) STANDARD SELECTABLE LUMEN LED 90CRI / 4000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1136.9 lumens
Efficiency: N/A
Efficacy: 108.3 lumens/watt
Spacing Criteria (0/90/45): 1.19 / 1.19 / 1.22
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct


Input Watts (W): 10.5
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P643689

CATALOG NUMBER: ML5615LSVWFL9FS1E - 693WB - 900LM - 4000K

Luminous Intensity Polar Plot

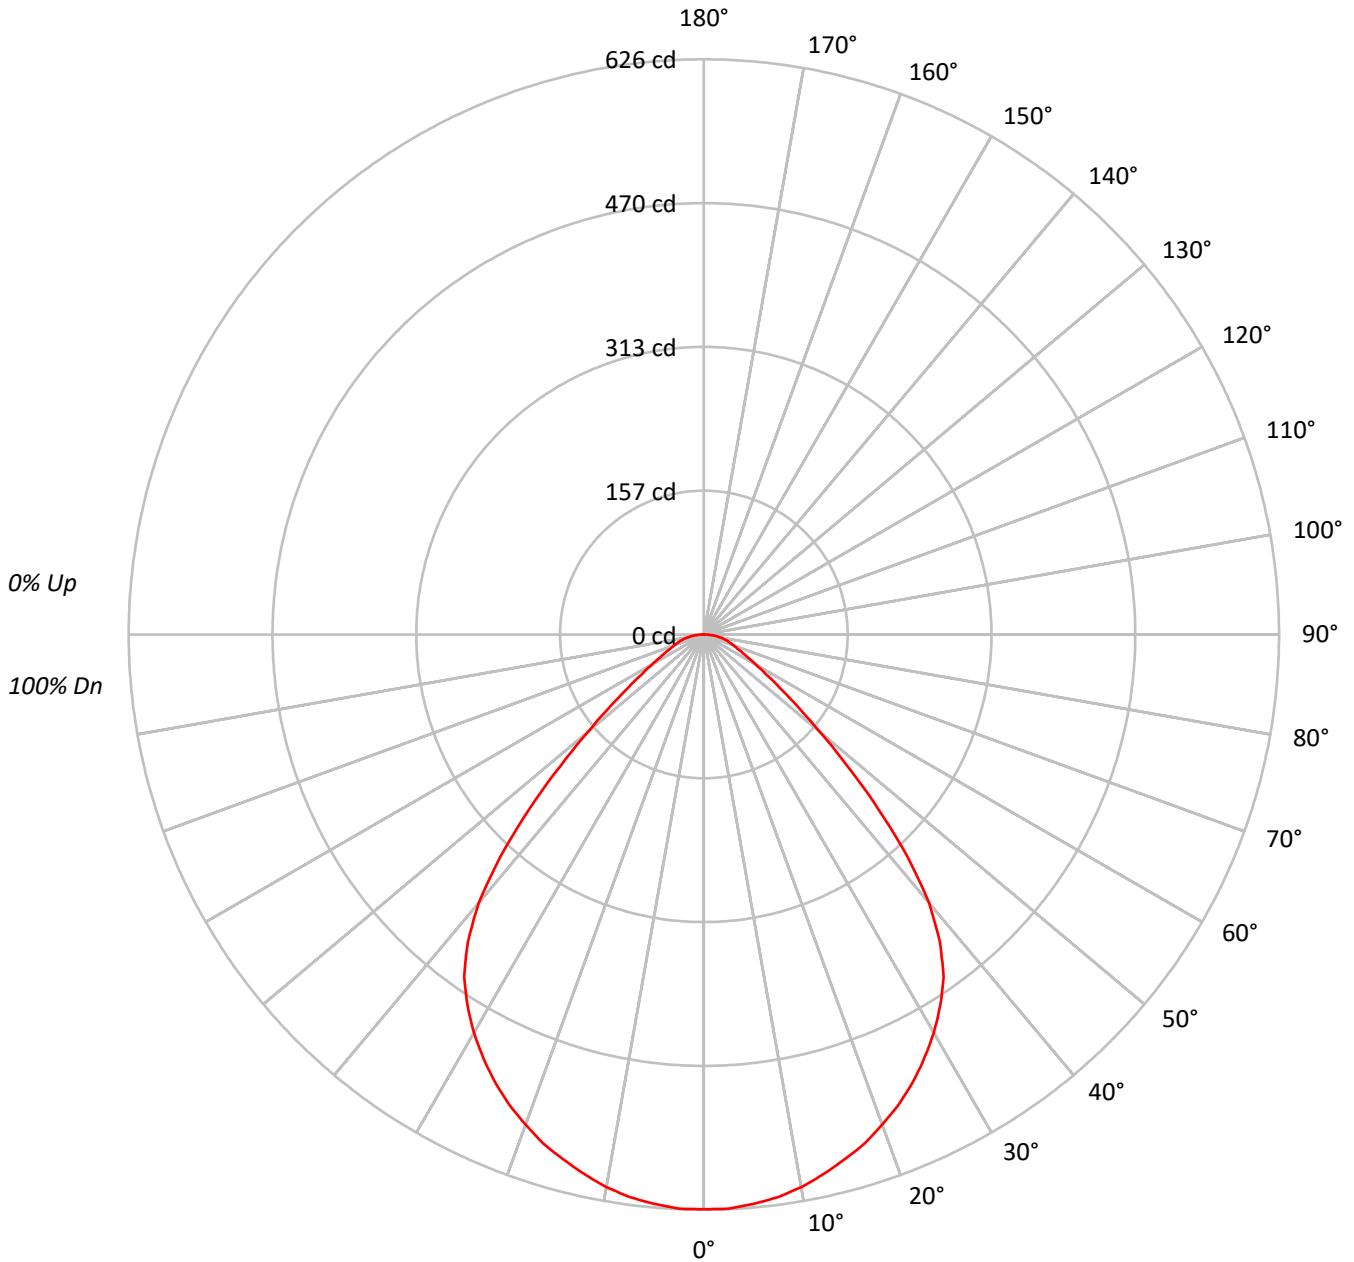



TEST NUMBER: P643689

CATALOG NUMBER: ML5615LSVWFL9FS1E - 693WB - 900LM - 4000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	111	108	104	101	109	105	102	100	101	99	97	97	95	94	94	92	91	89																			
2	103	97	92	87	101	95	90	86	92	88	84	89	85	82	86	83	80	79																			
3	96	88	81	76	94	86	80	75	83	78	74	81	76	73	78	75	71	70																			
4	89	80	72	67	87	78	72	66	76	70	65	74	69	65	72	67	64	62																			
5	83	73	65	59	81	71	64	59	70	63	58	68	62	58	66	61	57	56																			
6	78	66	59	53	76	65	58	53	64	57	53	62	57	52	61	56	52	50																			
7	73	61	53	48	71	60	53	48	59	52	48	57	52	47	56	51	47	45																			
8	68	56	49	44	67	56	48	43	54	48	43	53	47	43	52	47	43	41																			
9	64	52	45	40	63	52	45	40	50	44	40	49	44	39	48	43	39	38																			
10	60	48	41	37	59	48	41	36	47	41	36	46	40	36	45	40	36	34																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	34290
5°	34234
10°	33995
15°	33564
20°	33107
25°	32536
30°	31676
35°	30443
40°	27265
45°	20808
50°	13970
55°	9567
60°	7105
65°	5902
70°	5466
75°	5549
80°	5398
85°	5032

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 20808 cd/sqm



TEST NUMBER: P643689

CATALOG NUMBER: ML5615LSVWFL9FS1E - 693WB - 900LM - 4000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	59.0	5.2
10°-20°	166.9	14.7
20°-30°	247.3	21.8
30°-40°	280.7	24.7
40°-50°	206.7	18.2
50°-60°	93.7	8.2
60°-70°	46.3	4.1
70°-80°	27.2	2.4
80°-90°	9.1	0.8
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	473.2	41.6
0°-40°	753.9	66.3
0°-60°	1054.3	92.7
0°-90°	1136.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1136.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	626	
5°	622	59
15°	591	167
25°	538	247
35°	455	281
45°	268	207
55°	100	94
65°	46	46
75°	26	27
85°	8	9
90°	0	



TEST NUMBER: P643689

CATALOG NUMBER: ML5615LSVWFL9FS1E - 693WB - 900LM - 4000K

CANDELA DISTRIBUTION (FULL):

	0°
0°	625.5
2.5°	625.5
5°	622.1
7.5°	617.5
10°	610.7
12.5°	601.6
15°	591.4
17.5°	581.1
20°	567.5
22.5°	553.9
25°	537.9
27.5°	519.7
30°	500.4
32.5°	478.8
35°	454.9
37.5°	421.9
40°	381.0
42.5°	327.5
45°	268.4
47.5°	211.5
50°	163.8
52.5°	127.4
55°	100.1
57.5°	79.6
60°	64.8
62.5°	53.5
65°	45.5
67.5°	38.7
70°	34.1
72.5°	29.6
75°	26.2
77.5°	21.6
80°	17.1
82.5°	13.6
85°	8.0
87.5°	3.4
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)