

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P643725

Luminaire Tested: ML5615LSVWFL9FS1E - 696WB - 1200LM - 5000K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P643725
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-115)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5615LSVWFL9FS1E - 696WB - 1200LM - 5000K
Description: ML56 RR, MILKY OPTIC, 6" SHALLOW WHITE BAFFLE TRIM
Light Source: (1) STANDARD SELECTABLE LUMEN LED 90CRI / 5000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1494.4 lumens
Efficiency: N/A
Efficacy: 111.5 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.2 / 1.28
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct


Input Watts (W): 13.4
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P643725

CATALOG NUMBER: ML5615LSVWFL9FS1E - 696WB - 1200LM - 5000K

Luminous Intensity Polar Plot

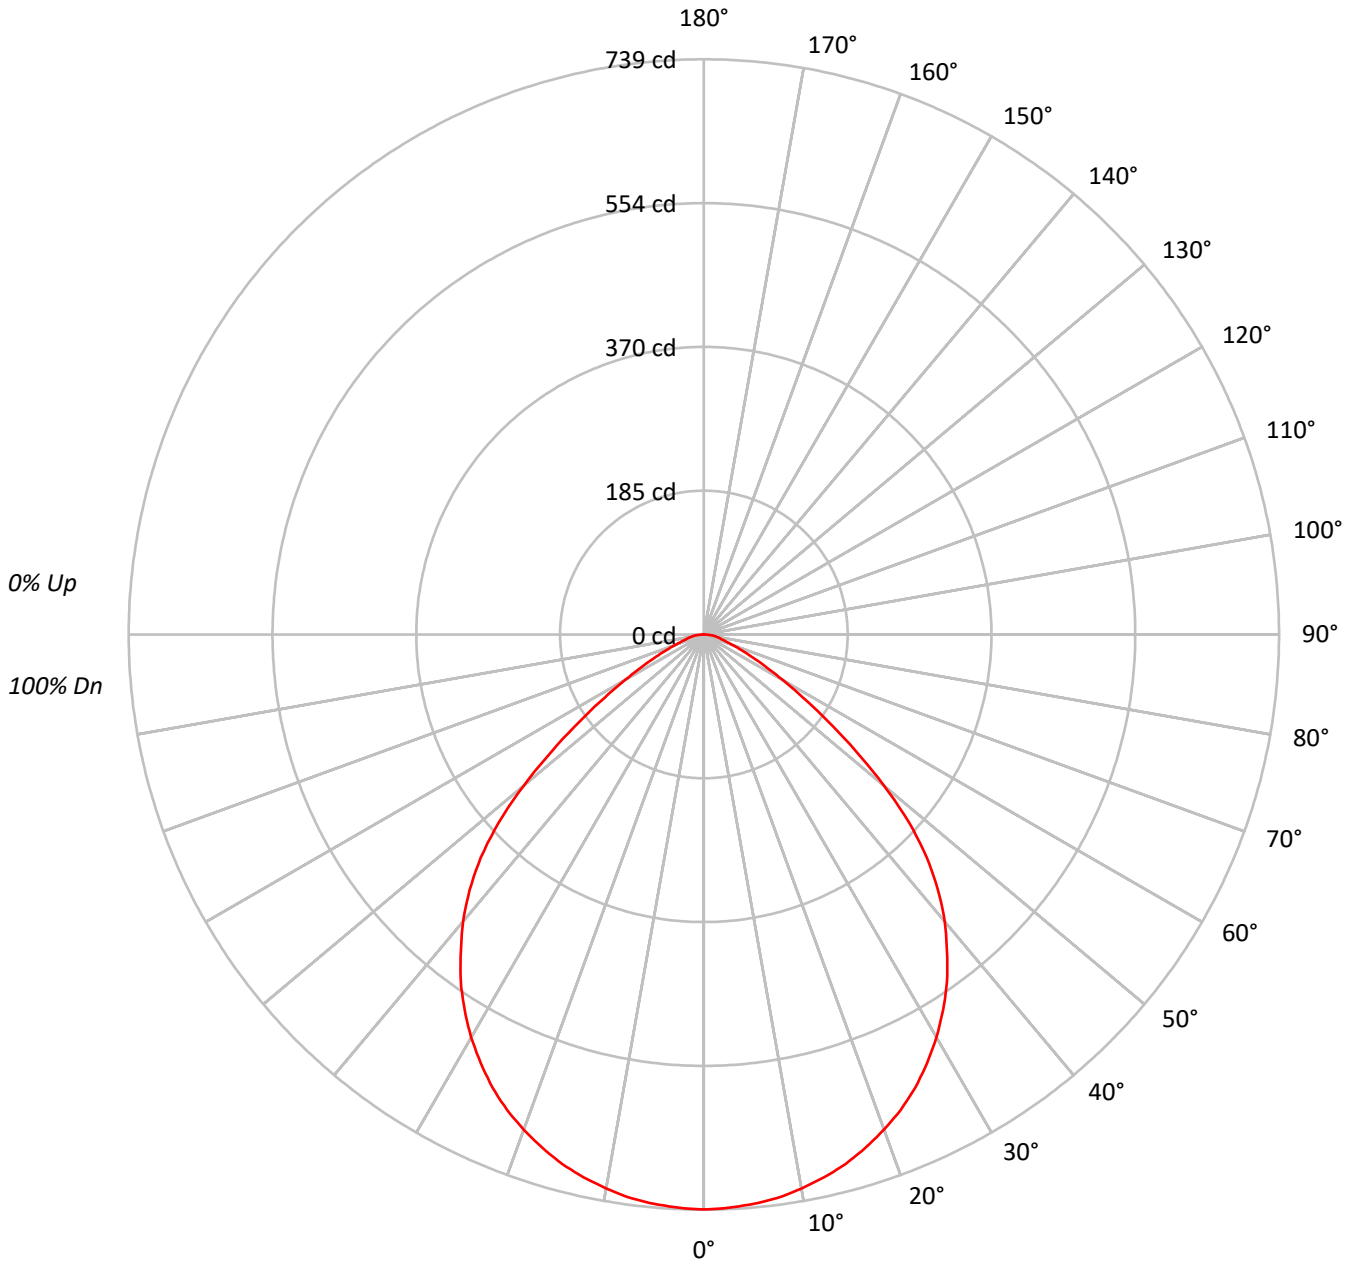



TEST NUMBER: P643725

CATALOG NUMBER: ML5615LSVWFL9FS1E - 696WB - 1200LM - 5000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	111	107	104	101	109	105	102	99	101	99	96	97	95	93	94	92	91	89																			
2	103	96	91	86	101	95	89	85	91	87	83	88	84	81	85	82	80	78																			
3	95	87	80	74	93	85	79	74	82	77	72	80	75	71	77	73	70	68																			
4	88	78	71	65	86	77	70	64	75	68	64	72	67	63	70	66	62	60																			
5	82	71	63	57	80	70	62	57	68	61	56	66	60	56	64	59	55	53																			
6	76	64	57	51	75	64	56	51	62	55	50	60	54	50	59	54	49	48																			
7	71	59	51	46	69	58	51	45	57	50	45	55	49	45	54	49	45	43																			
8	66	54	46	41	65	54	46	41	52	46	41	51	45	41	50	44	40	39																			
9	62	50	42	37	61	49	42	37	48	42	37	47	41	37	46	41	37	35																			
10	59	46	39	34	57	46	39	34	45	38	34	44	38	34	43	38	34	32																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	40496
5°	40414
10°	40241
15°	39966
20°	39489
25°	38857
30°	37848
35°	36453
40°	34457
45°	31422
50°	25739
55°	18542
60°	12762
65°	8769
70°	6219
75°	4872
80°	4988
85°	5409

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 31422 cd/sqm



TEST NUMBER: P643725

CATALOG NUMBER: ML5615LSVWFL9FS1E - 696WB - 1200LM - 5000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	69.8	4.7
10°-20°	198.5	13.3
20°-30°	295.4	19.8
30°-40°	339.3	22.7
40°-50°	308.0	20.6
50°-60°	177.8	11.9
60°-70°	70.5	4.7
70°-80°	26.5	1.8
80°-90°	8.8	0.6
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	563.6	37.7
0°-40°	902.9	60.4
0°-60°	1388.6	92.9
0°-90°	1494.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1494.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	739	
5°	734	70
15°	704	198
25°	642	295
35°	545	339
45°	405	308
55°	194	178
65°	68	70
75°	23	27
85°	9	9
90°	0	



TEST NUMBER: P643725

CATALOG NUMBER: ML5615LSVWFL9FS1E - 696WB - 1200LM - 5000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	738.7
2.5°	737.3
5°	734.4
7.5°	730.1
10°	722.9
12.5°	714.3
15°	704.2
17.5°	691.3
20°	676.9
22.5°	661.1
25°	642.4
27.5°	620.9
30°	597.9
32.5°	572.0
35°	544.7
37.5°	513.1
40°	481.5
42.5°	445.5
45°	405.3
47.5°	357.9
50°	301.8
52.5°	245.8
55°	194.0
57.5°	150.9
60°	116.4
62.5°	89.1
65°	67.6
67.5°	51.7
70°	38.8
72.5°	30.2
75°	23.0
77.5°	20.1
80°	15.8
82.5°	12.9
85°	8.6
87.5°	2.9
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)