

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P643733

Luminaire Tested: ML5615LSVWFL9FS1E - 696WB - 900LM - 3500K

Issue Date: 2/17/2023

**Test Information**

Test Method: LM-79-2019  
Report Number: P643733  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-115)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/17/2023  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: HALO  
Catalog Number: ML5615LSVWFL9FS1E - 696WB - 900LM - 3500K  
Description: ML56 RR, MILKY OPTIC, 6" SHALLOW WHITE BAFFLE TRIM  
Light Source: (1) STANDARD SELECTABLE LUMEN LED 90CRI / 3500K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1097.8 lumens  
Efficiency: N/A  
Efficacy: 104.5 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.2 / 1.28  
Luminous Opening: Circular (Dia: 0.5' x H: 0')  
CIE Type: Direct


Input Watts (W): 10.5  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



TEST NUMBER: P643733

CATALOG NUMBER: ML5615LSVWFL9FS1E - 696WB - 900LM - 3500K

### Luminous Intensity Polar Plot

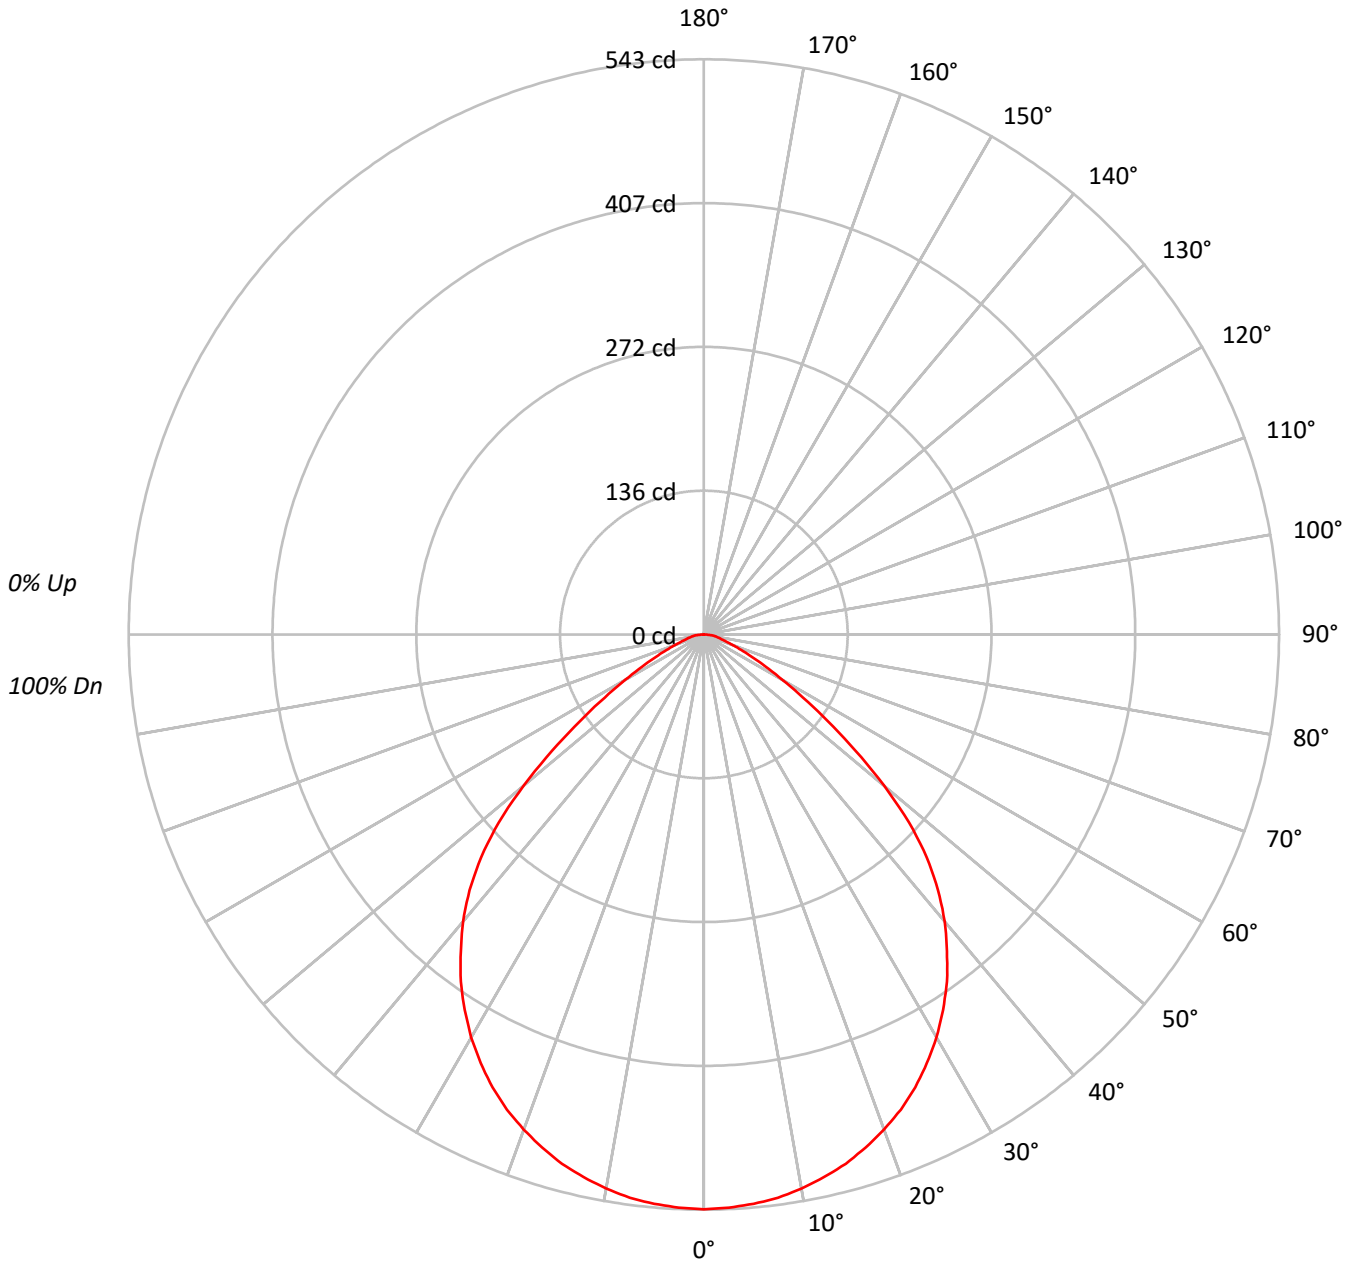



TEST NUMBER: P643733

CATALOG NUMBER: ML5615LSVWFL9FS1E - 696WB - 900LM - 3500K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	111	107	104	101	109	105	102	99	101	99	96	97	95	93	94	92	91	89			
2	103	96	91	86	101	95	89	85	91	87	83	88	84	81	85	82	80	78			
3	95	87	80	74	93	85	79	74	82	77	72	80	75	71	77	73	70	68			
4	88	78	71	65	86	77	70	64	75	68	64	72	67	63	70	66	62	60			
5	82	71	63	57	80	70	62	57	68	61	56	66	60	56	64	59	55	53			
6	76	64	57	51	75	64	56	51	62	55	50	60	54	50	59	54	49	48			
7	71	59	51	46	69	58	51	45	57	50	45	55	49	45	54	49	45	43			
8	66	54	46	41	65	54	46	41	52	46	41	51	45	41	50	44	40	39			
9	62	50	42	37	61	49	42	37	48	42	37	47	41	37	46	41	37	35			
10	59	46	39	34	57	46	39	34	45	38	34	44	38	34	43	38	34	32			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	29751
5°	29688
10°	29559
15°	29359
20°	29012
25°	28544
30°	27802
35°	26776
40°	25312
45°	23080
50°	18908
55°	13620
60°	9374
65°	6434
70°	4568
75°	3580
80°	3662
85°	3963

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 23080 cd/sqm



TEST NUMBER: P643733

CATALOG NUMBER: ML5615LSVWFL9FS1E - 696WB - 900LM - 3500K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	51.2	4.7
10°-20°	145.8	13.3
20°-30°	217.0	19.8
30°-40°	249.2	22.7
40°-50°	226.2	20.6
50°-60°	130.6	11.9
60°-70°	51.8	4.7
70°-80°	19.5	1.8
80°-90°	6.4	0.6
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	414.0	37.7
0°-40°	663.2	60.4
0°-60°	1020.0	92.9
0°-90°	1097.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1097.8	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	543	
5°	540	51
15°	517	146
25°	472	217
35°	400	249
45°	298	226
55°	142	131
65°	50	52
75°	17	19
85°	6	6
90°	0	



TEST NUMBER: P643733

CATALOG NUMBER: ML5615LSVWFL9FS1E - 696WB - 900LM - 3500K

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	542.7
2.5°	541.6
5°	539.5
7.5°	536.3
10°	531.0
12.5°	524.7
15°	517.3
17.5°	507.8
20°	497.3
22.5°	485.6
25°	471.9
27.5°	456.1
30°	439.2
32.5°	420.2
35°	400.1
37.5°	376.9
40°	353.7
42.5°	327.3
45°	297.7
47.5°	262.9
50°	221.7
52.5°	180.5
55°	142.5
57.5°	110.9
60°	85.5
62.5°	65.5
65°	49.6
67.5°	38.0
70°	28.5
72.5°	22.2
75°	16.9
77.5°	14.8
80°	11.6
82.5°	9.5
85°	6.3
87.5°	2.1
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)