

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P643762

Luminaire Tested: ML5615LSWFL559FS1E - 592H - 900LM - 3000K

Issue Date: 2/17/2023

**Test Information**

Test Method: LM-79-2019  
Report Number: P643762  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-49)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/17/2023  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: HALO  
Catalog Number: ML5615LSWFL559FS1E - 592H - 900LM - 3000K  
Description: ML56 RR, 55D TIR OPTIC, 5" HAZE TRIM  
Light Source: (1) STANDARD SELECTABLE LUMEN LED 90CRI / 3000K CCT  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 1155.1 lumens  
Efficiency: N/A  
Efficacy: 110.0 lumens/watt  
Spacing Criteria (0/90/45): 0.85 / 0.85 / 0.88  
Luminous Opening: Circular (Dia: 0.42' x H: 0')  
CIE Type: Direct

Input Watts (W): 10.5  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



TEST NUMBER: P643762  
CATALOG NUMBER: ML5615LSWFL559FS1E - 592H - 900LM - 3000K

### Luminous Intensity Polar Plot

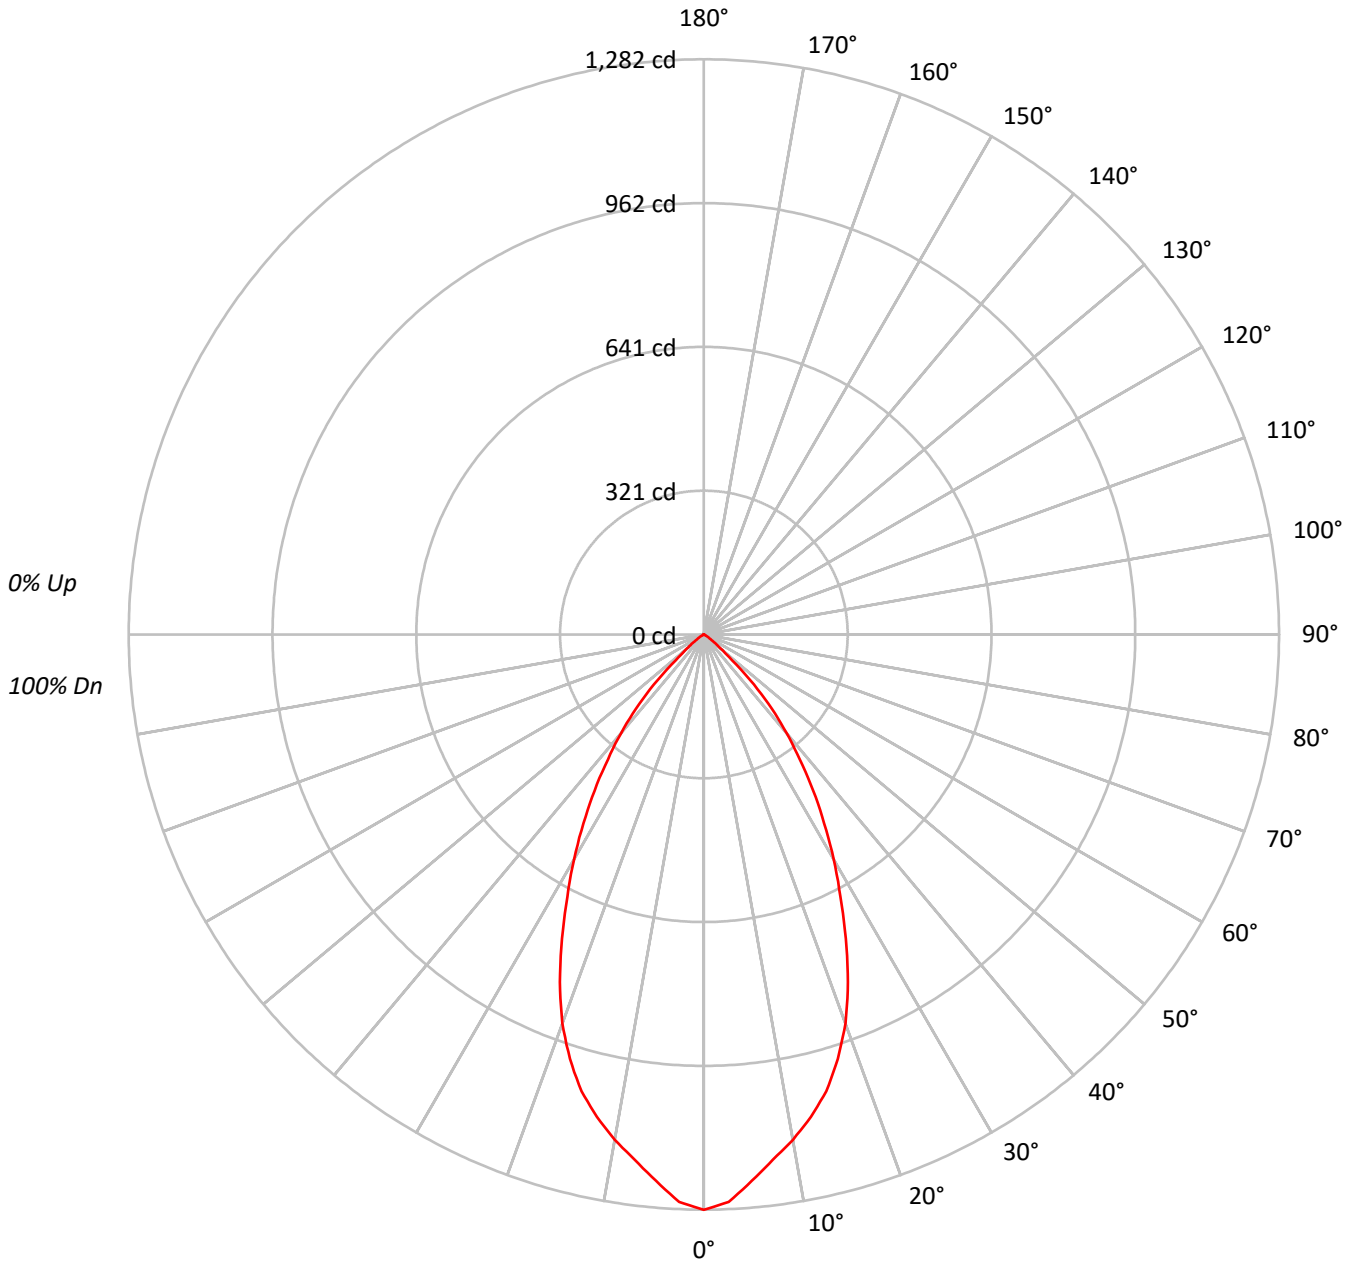



TEST NUMBER: P643762  
 CATALOG NUMBER: ML5615LSWFL559FS1E - 592H - 900LM - 3000K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|---|--|--|--|--|--|--|----|--|--|--|--|--|--|--|--|---|
| RF  | 20  |     |     |     |     |     |     |     |     | 20  |     |     |     |     |     |     |     |     | 20 |    |   |  |  |  |  |  |  | 20 |  |  |  |  |  |  |  |  |   |
| RC  | 80  |     |     |     |     |     |     |     |     | 50  |     |     |     |     |     |     |     |     | 30 |    |   |  |  |  |  |  |  | 10 |  |  |  |  |  |  |  |  | 0 |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30 | 10 | 0 |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| RCR |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 1   | 113 | 110 | 108 | 106 | 111 | 108 | 106 | 104 | 104 | 102 | 101 | 101 | 99  | 98  | 97  | 96  | 95  | 93  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 2   | 107 | 102 | 98  | 95  | 105 | 101 | 97  | 94  | 97  | 94  | 92  | 94  | 92  | 90  | 92  | 90  | 88  | 86  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 3   | 102 | 95  | 90  | 86  | 100 | 94  | 89  | 85  | 91  | 87  | 84  | 89  | 85  | 82  | 86  | 84  | 81  | 80  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 4   | 96  | 88  | 83  | 78  | 94  | 87  | 82  | 78  | 85  | 81  | 77  | 83  | 79  | 76  | 81  | 78  | 75  | 74  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 5   | 91  | 82  | 76  | 72  | 89  | 82  | 76  | 72  | 80  | 75  | 71  | 78  | 74  | 70  | 76  | 73  | 70  | 68  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 6   | 86  | 77  | 71  | 66  | 85  | 76  | 70  | 66  | 75  | 70  | 66  | 73  | 69  | 65  | 72  | 68  | 65  | 63  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 7   | 82  | 72  | 66  | 62  | 80  | 71  | 66  | 61  | 70  | 65  | 61  | 69  | 64  | 61  | 68  | 64  | 60  | 59  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 8   | 78  | 68  | 61  | 57  | 76  | 67  | 61  | 57  | 66  | 61  | 57  | 65  | 60  | 57  | 64  | 60  | 56  | 55  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 9   | 74  | 64  | 58  | 53  | 73  | 63  | 57  | 53  | 62  | 57  | 53  | 61  | 56  | 53  | 60  | 56  | 53  | 51  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 10  | 70  | 60  | 54  | 50  | 69  | 60  | 54  | 50  | 59  | 53  | 50  | 58  | 53  | 50  | 57  | 53  | 50  | 48  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |

**AVERAGE LUMINANCE (cd/sqm):**

|     |        |
|-----|--------|
|     | 0°     |
| 0°  | 101234 |
| 5°  | 96890  |
| 10° | 91661  |
| 15° | 86131  |
| 20° | 77471  |
| 25° | 65169  |
| 30° | 52723  |
| 35° | 40966  |
| 40° | 29596  |
| 45° | 17583  |
| 50° | 5944   |
| 55° | 2698   |
| 60° | 805    |
| 65° | 187    |
| 70° | 0      |
| 75° | 0      |
| 80° | 0      |
| 85° | 0      |

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 17583 cd/sqm



TEST NUMBER: P643762

CATALOG NUMBER: ML5615LSWFL559FS1E - 592H - 900LM - 3000K

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 114.2  | 9.9       |
| 10°-20°   | 293.1  | 25.4      |
| 20°-30°   | 341.9  | 29.6      |
| 30°-40°   | 264.7  | 22.9      |
| 40°-50°   | 120.1  | 10.4      |
| 50°-60°   | 19.5   | 1.7       |
| 60°-70°   | 1.6    | 0.1       |
| 70°-80°   | 0.0    | 0.0       |
| 80°-90°   | 0.0    | 0.0       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| 0°-30°    | 749.3  | 64.9      |
| 0°-40°    | 1013.9 | 87.8      |
| 0°-60°    | 1153.5 | 99.9      |
| 0°-90°    | 1155.1 | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 1155.1 | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°   | Flux |
|-----|------|------|
| 0°  | 1282 |      |
| 5°  | 1223 | 114  |
| 15° | 1054 | 293  |
| 25° | 748  | 342  |
| 35° | 425  | 265  |
| 45° | 158  | 120  |
| 55° | 20   | 20   |
| 65° | 1    | 2    |
| 75° | 0    | 0    |
| 85° | 0    | 0    |
| 90° | 0    |      |



TEST NUMBER: P643762

CATALOG NUMBER: ML5615LSWFL559FS1E - 592H - 900LM - 3000K

**CANDELA DISTRIBUTION (FULL):**

| 0°    |        |
|-------|--------|
| 0°    | 1282.4 |
| 2.5°  | 1265.9 |
| 5°    | 1222.7 |
| 7.5°  | 1180.5 |
| 10°   | 1143.5 |
| 12.5° | 1101.3 |
| 15°   | 1053.9 |
| 17.5° | 992.2  |
| 20°   | 922.2  |
| 22.5° | 838.8  |
| 25°   | 748.2  |
| 27.5° | 658.7  |
| 30°   | 578.4  |
| 32.5° | 499.2  |
| 35°   | 425.1  |
| 37.5° | 351.0  |
| 40°   | 287.2  |
| 42.5° | 224.4  |
| 45°   | 157.5  |
| 47.5° | 84.4   |
| 50°   | 48.4   |
| 52.5° | 30.9   |
| 55°   | 19.6   |
| 57.5° | 11.3   |
| 60°   | 5.1    |
| 62.5° | 2.1    |
| 65°   | 1.0    |
| 67.5° | 1.0    |
| 70°   | 0.0    |
| 72.5° | 0.0    |
| 75°   | 0.0    |
| 77.5° | 0.0    |
| 80°   | 0.0    |
| 82.5° | 0.0    |
| 85°   | 0.0    |
| 87.5° | 0.0    |
| 90°   | 0.0    |

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)