

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P643872

Luminaire Tested: ML5615LSWFL559FS1E - 594TBZB - 1200LM - 3000K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P643872
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-57)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5615LSWFL559FS1E - 594TBZB - 1200LM - 3000K
Description: ML56 RR, 55D TIR OPTIC, 5" TUSCON BRONZE GIMBAL TRIM
Light Source: (1) STANDARD SELECTABLE LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1479.1 lumens
Efficiency: N/A
Efficacy: 110.4 lumens/watt
Spacing Criteria (0/90/45): 0.86 / 0.86 / 0.88
Luminous Opening: Circular (Dia: 0.42' x H: 0')
CIE Type: Direct


Input Watts (W): 13.4
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P643872

CATALOG NUMBER: ML5615LSWFL559FS1E - 594TBZB - 1200LM - 3000K

Luminous Intensity Polar Plot

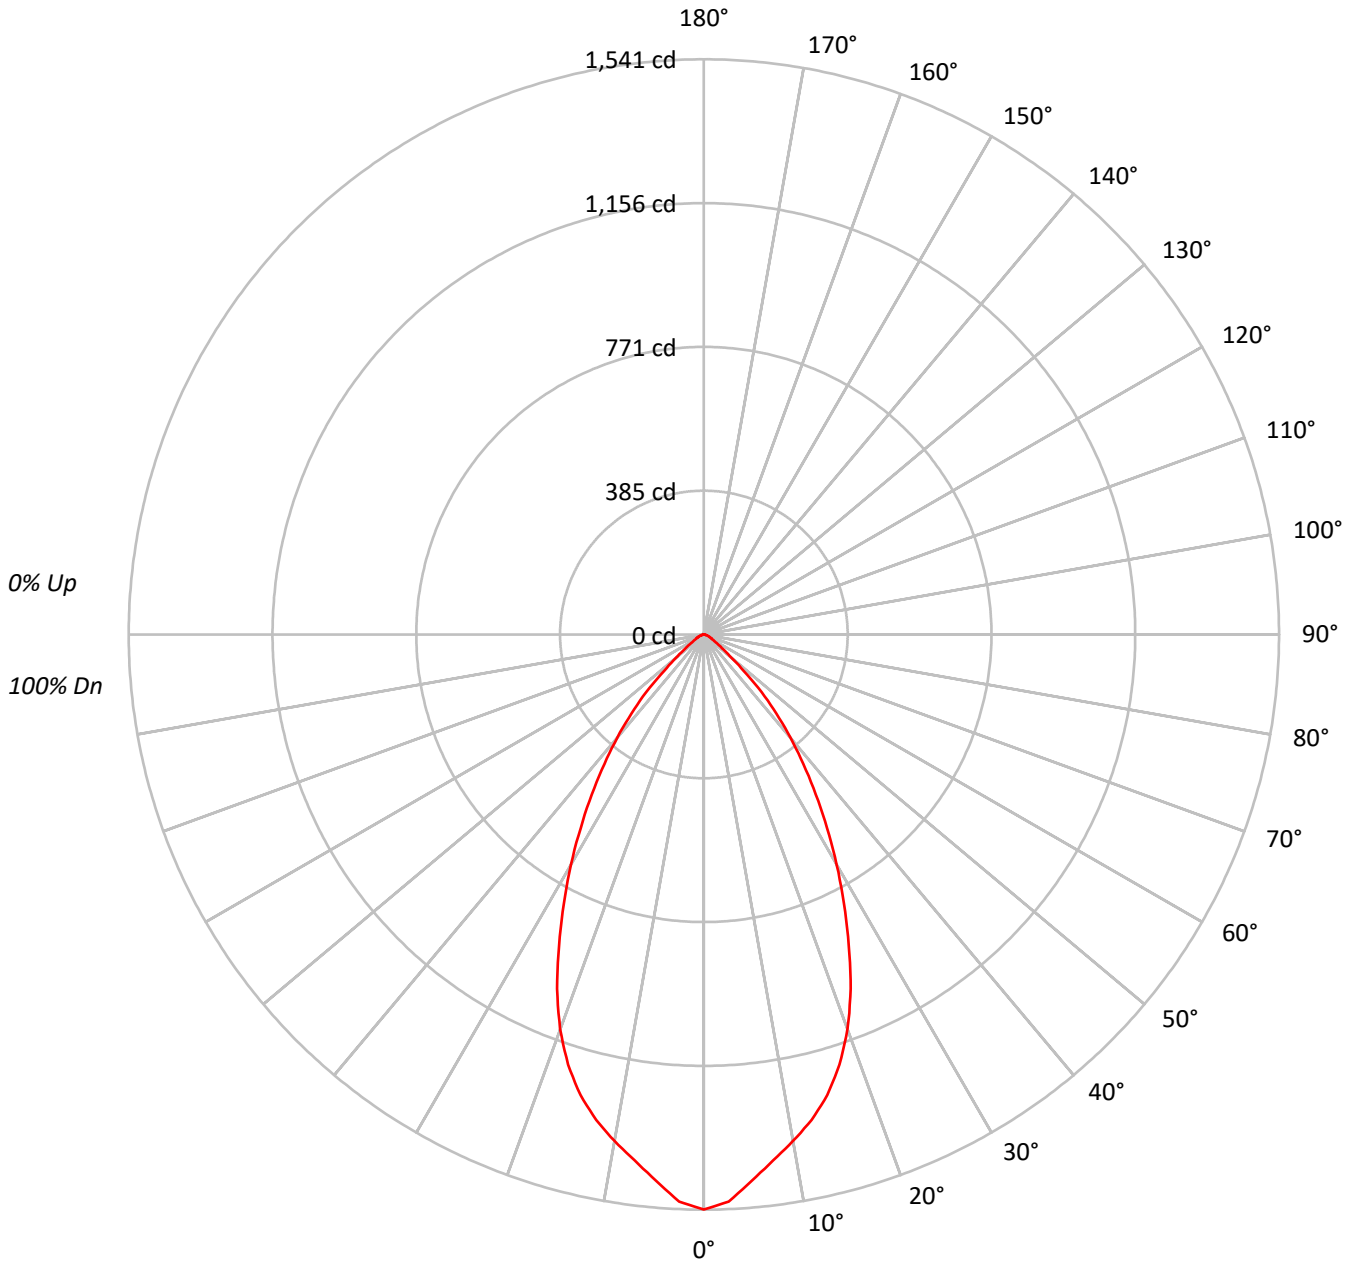



TEST NUMBER: P643872

CATALOG NUMBER: ML5615LSWFL559FS1E - 594TBZB - 1200LM - 3000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100																
1	113	110	107	105	110	108	105	103	104	102	100	100	98	97	97	95	94	92			92																
2	107	101	97	93	105	100	96	92	96	93	90	93	91	88	91	88	87	85			85																
3	101	94	88	84	99	92	87	83	90	86	82	87	84	81	85	82	80	78			78																
4	95	87	81	76	93	86	80	76	84	79	75	82	77	74	80	76	73	72			72																
5	90	81	74	70	88	80	74	70	78	73	69	76	72	68	75	71	68	66			66																
6	85	75	69	64	83	74	68	64	73	68	64	71	67	63	70	66	63	61			61																
7	80	70	64	59	79	70	64	59	68	63	59	67	62	59	66	62	58	57			57																
8	76	66	59	55	75	65	59	55	64	59	55	63	58	54	62	58	54	53			53																
9	72	62	56	51	71	61	55	51	60	55	51	59	54	51	59	54	51	49			49																
10	69	58	52	48	68	58	52	48	57	52	48	56	51	48	55	51	47	46			46																

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	121616
5°	116407
10°	110451
15°	104421
20°	94550
25°	80012
30°	64874
35°	50411
40°	37139
45°	24404
50°	11827
55°	6262
60°	4105
65°	3400
70°	2700
75°	1983
80°	1182
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 24404 cd/sqm



TEST NUMBER: P643872

CATALOG NUMBER: ML5615LSWFL559FS1E - 594TBZB - 1200LM - 3000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	137.4	9.3
10°-20°	355.7	24.1
20°-30°	419.8	28.4
30°-40°	327.1	22.1
40°-50°	167.3	11.3
50°-60°	45.5	3.1
60°-70°	18.5	1.2
70°-80°	7.0	0.5
80°-90°	0.7	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	913.0	61.7
0°-40°	1240.1	83.8
0°-60°	1452.9	98.2
0°-90°	1479.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1479.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1541	
5°	1469	137
15°	1278	356
25°	919	420
35°	523	327
45°	219	167
55°	46	46
65°	18	18
75°	6	7
85°	0	1
90°	0	



TEST NUMBER: P643872

CATALOG NUMBER: ML5615LSWFL559FS1E - 594TBZB - 1200LM - 3000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	1540.6
2.5°	1521.0
5°	1469.0
7.5°	1420.9
10°	1377.9
12.5°	1332.4
15°	1277.7
17.5°	1208.8
20°	1125.5
22.5°	1027.9
25°	918.6
27.5°	811.9
30°	711.7
32.5°	614.1
35°	523.1
37.5°	437.2
40°	360.4
42.5°	287.6
45°	218.6
47.5°	144.4
50°	96.3
52.5°	65.1
55°	45.5
57.5°	33.8
60°	26.0
62.5°	22.1
65°	18.2
67.5°	15.6
70°	11.7
72.5°	9.1
75°	6.5
77.5°	3.9
80°	2.6
82.5°	1.3
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)