

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P643905

Luminaire Tested: ML5615LSWFL559FS1E - 596WB - 1200LM - 5000K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P643905
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-58)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5615LSWFL559FS1E - 596WB - 1200LM - 5000K
Description: ML56 RR, 55D TIR OPTIC, 5" SHALLOW WHITE BAFFLE TRIM
Light Source: (1) STANDARD SELECTABLE LUMEN LED 90CRI / 5000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1654.1 lumens
Efficiency: N/A
Efficacy: 123.4 lumens/watt
Spacing Criteria (0/90/45): 0.86 / 0.86 / 0.89
Luminous Opening: Circular (Dia: 0.42' x H: 0')
CIE Type: Direct


Input Watts (W): 13.4
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P643905

CATALOG NUMBER: ML5615LSWFL559FS1E - 596WB - 1200LM - 5000K

Luminous Intensity Polar Plot

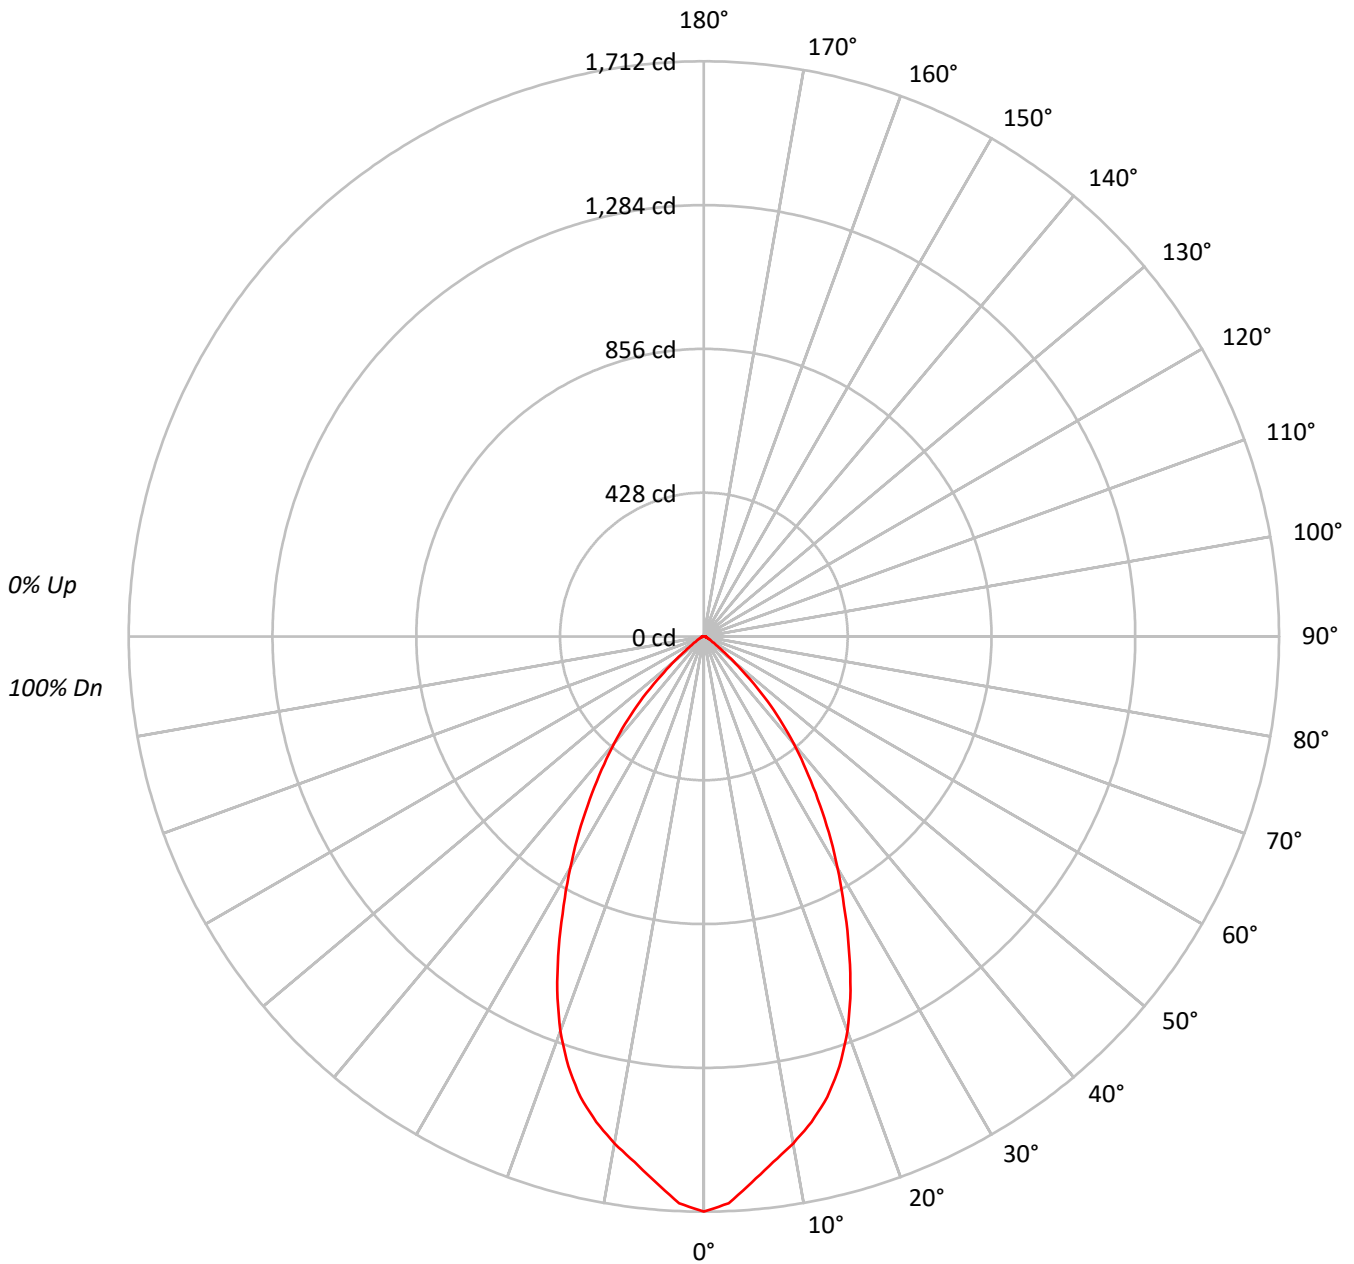



TEST NUMBER: P643905

CATALOG NUMBER: ML5615LSWFL559FS1E - 596WB - 1200LM - 5000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100															
1	113	110	107	105	110	108	105	103	104	102	100	100	98	97	96	95	94	92				92															
2	107	101	97	93	104	100	96	92	96	93	90	93	91	88	91	88	86	85				85															
3	101	94	88	84	99	92	87	83	90	85	82	87	84	81	85	82	79	78				78															
4	95	87	81	76	93	86	80	76	84	79	75	81	77	74	80	76	73	72				72															
5	90	81	74	70	88	80	74	69	78	73	69	76	72	68	75	71	68	66				66															
6	85	75	69	64	83	74	68	64	73	67	63	71	67	63	70	66	63	61				61															
7	80	70	64	59	79	70	63	59	68	63	59	67	62	58	66	61	58	57				57															
8	76	66	59	55	75	65	59	55	64	59	55	63	58	54	62	58	54	53				53															
9	72	62	55	51	71	61	55	51	60	55	51	59	54	51	59	54	51	49				49															
10	69	58	52	48	67	58	52	48	57	51	48	56	51	48	55	51	47	46				46															

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	135123
5°	129252
10°	122795
15°	116026
20°	105001
25°	88948
30°	72503
35°	56973
40°	42838
45°	28580
50°	13779
55°	6138
60°	3868
65°	2690
70°	1985
75°	1312
80°	2637
85°	3895

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 28580 cd/sqm



TEST NUMBER: P643905

CATALOG NUMBER: ML5615LSWFL559FS1E - 596WB - 1200LM - 5000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	152.7	9.2
10°-20°	395.1	23.9
20°-30°	466.8	28.2
30°-40°	370.3	22.4
40°-50°	195.1	11.8
50°-60°	47.5	2.9
60°-70°	15.1	0.9
70°-80°	6.8	0.4
80°-90°	4.7	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1014.5	61.3
0°-40°	1384.9	83.7
0°-60°	1627.5	98.4
0°-90°	1654.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1654.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1712	
5°	1631	153
15°	1420	395
25°	1021	467
35°	591	370
45°	256	195
55°	45	48
65°	14	15
75°	4	7
85°	4	5
90°	0	



TEST NUMBER: P643905

CATALOG NUMBER: ML5615LSWFL559FS1E - 596WB - 1200LM - 5000K

CANDELA DISTRIBUTION (FULL):

	0°
0°	1711.7
2.5°	1688.6
5°	1631.1
7.5°	1577.9
10°	1531.9
12.5°	1480.1
15°	1419.7
17.5°	1342.0
20°	1249.9
22.5°	1140.6
25°	1021.2
27.5°	903.3
30°	795.4
32.5°	691.9
35°	591.2
37.5°	499.1
40°	415.7
42.5°	333.7
45°	256.0
47.5°	171.2
50°	112.2
52.5°	70.5
55°	44.6
57.5°	31.6
60°	24.5
62.5°	18.7
65°	14.4
67.5°	11.5
70°	8.6
72.5°	7.2
75°	4.3
77.5°	7.2
80°	5.8
82.5°	5.8
85°	4.3
87.5°	4.3
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)