

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P643926

Luminaire Tested: ML5615LSWFL559FS1E - 691WB - 900LM - 2700K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P643926
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-59)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5615LSWFL559FS1E - 691WB - 900LM - 2700K
Description: ML56 RR, 55D TIR OPTIC, 6" DEADFRONT TRIM
Light Source: (1) STANDARD SELECTABLE LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1131.0 lumens
Efficiency: N/A
Efficacy: 107.7 lumens/watt
Spacing Criteria (0/90/45): 0.86 / 0.86 / 0.89
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct

Input Watts (W): 10.5
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P643926
CATALOG NUMBER: ML5615LSWFL559FS1E - 691WB - 900LM - 2700K

Luminous Intensity Polar Plot

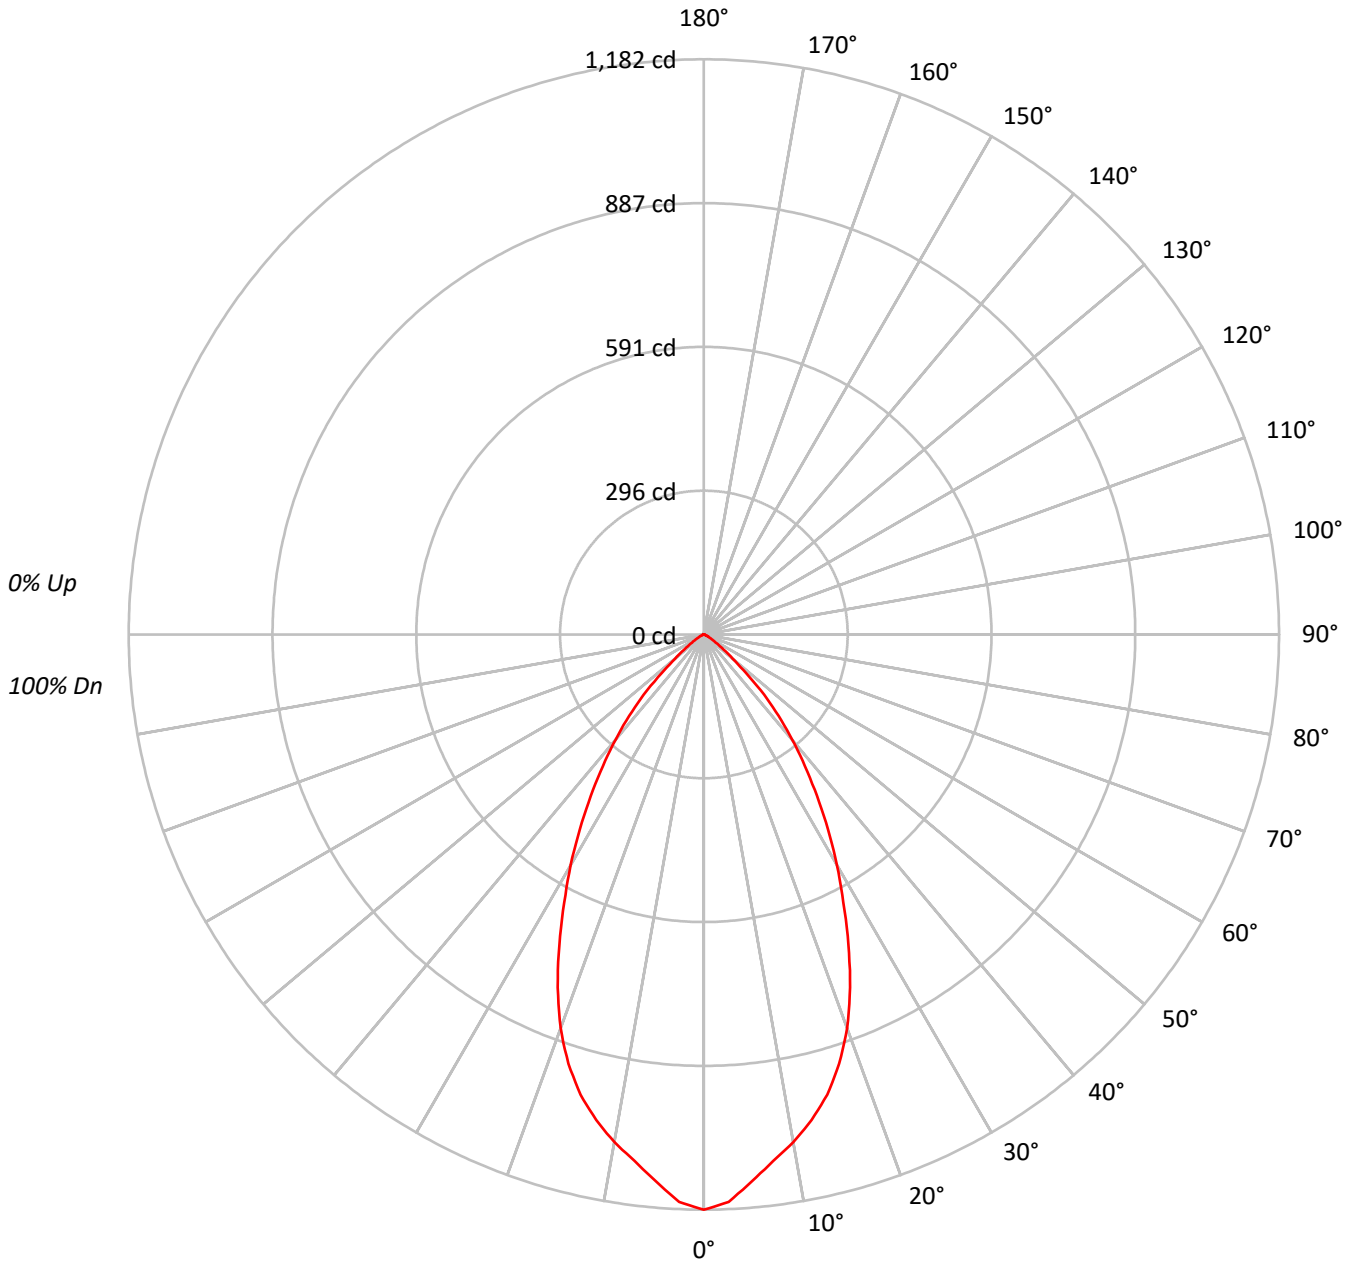



TEST NUMBER: P643926

CATALOG NUMBER: ML5615LSWFL559FS1E - 691WB - 900LM - 2700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100																
1	113	110	107	105	111	108	106	103	104	102	100	100	99	97	97	96	94	93			93																
2	107	102	97	94	105	100	96	93	97	93	91	94	91	89	91	89	87	85			85																
3	101	94	89	84	99	93	88	84	90	86	82	88	84	81	85	82	80	78			78																
4	95	87	81	77	93	86	81	76	84	79	75	82	78	74	80	76	74	72			72																
5	90	81	75	70	88	80	74	70	78	73	69	77	72	69	75	71	68	66			66																
6	85	76	69	65	84	75	69	64	73	68	64	72	67	63	70	66	63	61			61																
7	81	71	64	60	79	70	64	59	69	63	59	67	62	59	66	62	58	57			57																
8	76	66	60	55	75	66	59	55	64	59	55	63	58	55	62	58	54	53			53																
9	72	62	56	52	71	62	56	51	61	55	51	60	55	51	59	54	51	49			49																
10	69	58	52	48	68	58	52	48	57	52	48	56	51	48	56	51	48	46			46																

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	64803
5°	62079
10°	58956
15°	55568
20°	50235
25°	42523
30°	34626
35°	27104
40°	20181
45°	13567
50°	6567
55°	3250
60°	1645
65°	1038
70°	481
75°	424
80°	316
85°	629

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 13567 cd/sqm



TEST NUMBER: P643926

CATALOG NUMBER: ML5615LSWFL559FS1E - 691WB - 900LM - 2700K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	105.5	9.3
10°-20°	272.6	24.1
20°-30°	321.2	28.4
30°-40°	253.4	22.4
40°-50°	133.0	11.8
50°-60°	34.0	3.0
60°-70°	8.1	0.7
70°-80°	2.1	0.2
80°-90°	1.0	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	699.3	61.8
0°-40°	952.8	84.2
0°-60°	1119.8	99.0
0°-90°	1131.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1131.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1182	
5°	1128	106
15°	979	273
25°	703	321
35°	405	253
45°	175	133
55°	34	34
65°	8	8
75°	2	2
85°	1	1
90°	0	



TEST NUMBER: P643926

CATALOG NUMBER: ML5615LSWFL559FS1E - 691WB - 900LM - 2700K

CANDELA DISTRIBUTION (FULL):

0°	
0°	1182.1
2.5°	1167.1
5°	1128.1
7.5°	1091.1
10°	1059.1
12.5°	1022.1
15°	979.1
17.5°	925.1
20°	861.1
22.5°	785.1
25°	703.0
27.5°	621.0
30°	547.0
32.5°	474.0
35°	405.0
37.5°	341.0
40°	282.0
42.5°	227.0
45°	175.0
47.5°	117.0
50°	77.0
52.5°	52.0
55°	34.0
57.5°	22.0
60°	15.0
62.5°	11.0
65°	8.0
67.5°	5.0
70°	3.0
72.5°	2.0
75°	2.0
77.5°	2.0
80°	1.0
82.5°	1.0
85°	1.0
87.5°	1.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)