

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: HALO

Report Number: P643930

Luminaire Tested: ML5615LSWFL559FS1E - 691WB - 900LM - 5000K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P643930
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-59)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5615LSWFL559FS1E - 691WB - 900LM - 5000K
Description: ML56 RR, 55D TIR OPTIC, 6" DEADFRONT TRIM
Light Source: (1) STANDARD SELECTABLE LUMEN LED 90CRI / 5000K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1286.2 lumens
Efficiency: N/A
Efficacy: 122.5 lumens/watt
Spacing Criteria (0/90/45): 0.86 / 0.86 / 0.89
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct

Input Watts (W): 10.5
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P643930
CATALOG NUMBER: ML5615LSWFL559FS1E - 691WB - 900LM - 5000K

Luminous Intensity Polar Plot

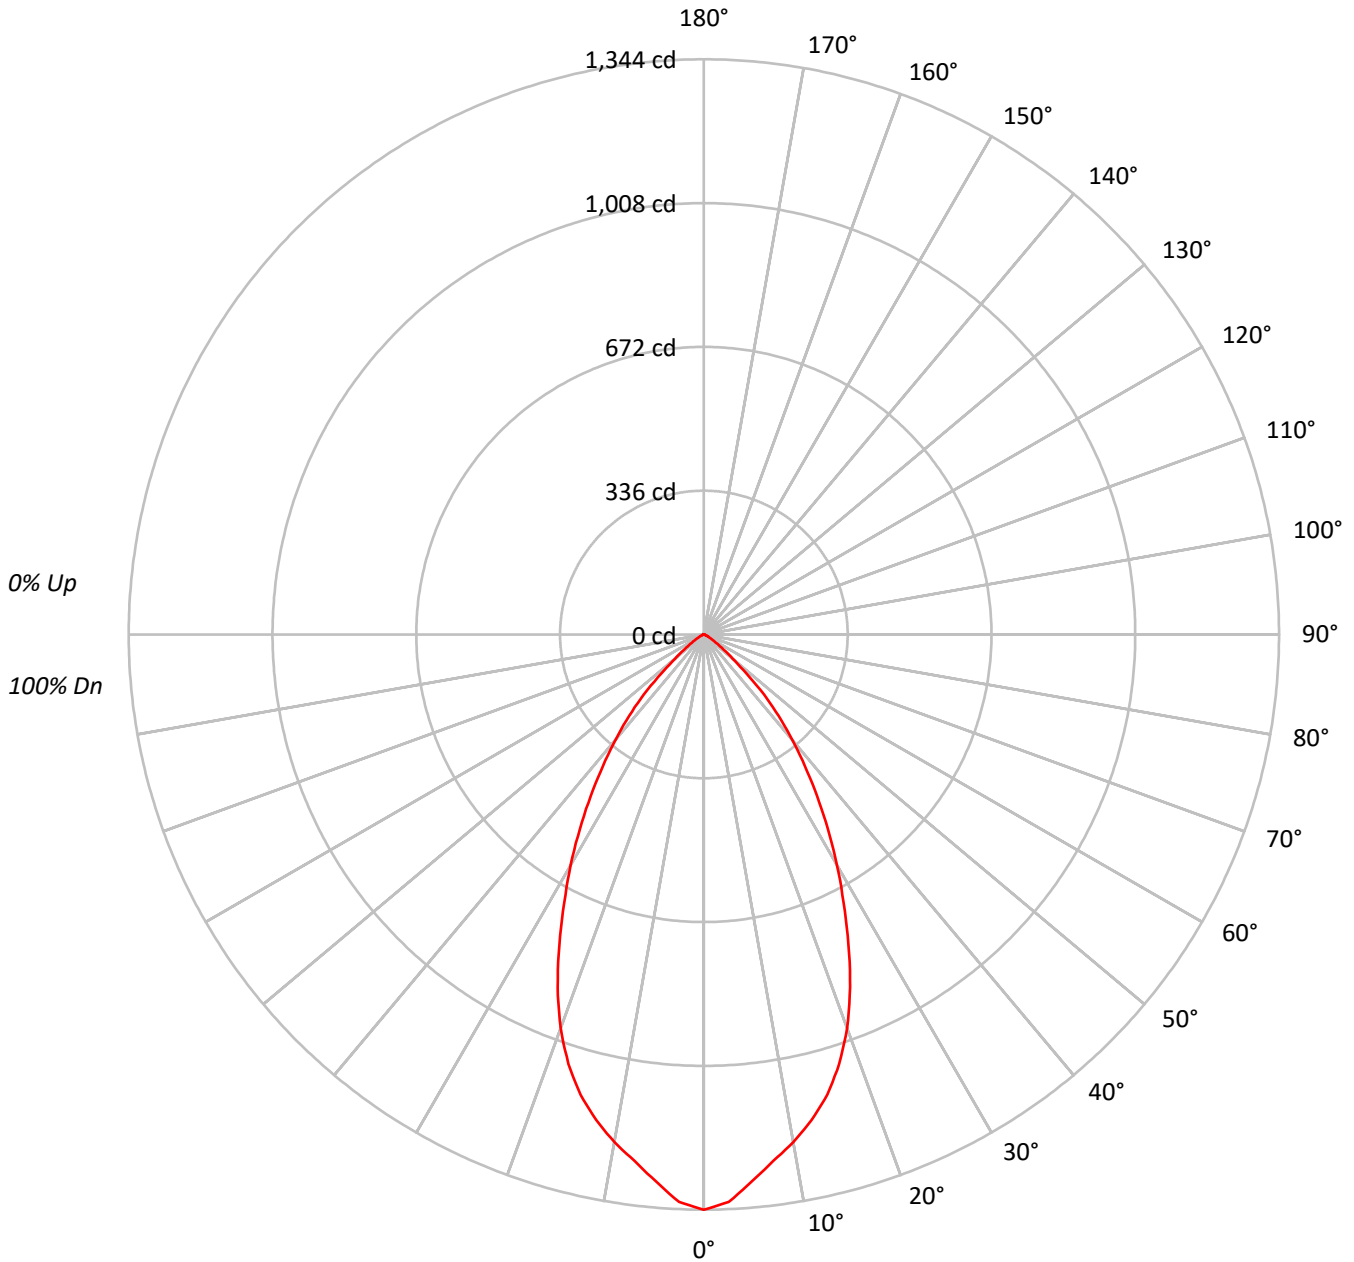



TEST NUMBER: P643930

CATALOG NUMBER: ML5615LSWFL559FS1E - 691WB - 900LM - 5000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100																
1	113	110	107	105	111	108	106	103	104	102	100	100	99	97	97	96	94	93			93																
2	107	102	97	94	105	100	96	93	97	93	91	94	91	89	91	89	87	85			85																
3	101	94	89	84	99	93	88	84	90	86	82	88	84	81	85	82	80	78			78																
4	95	87	81	77	93	86	81	76	84	79	75	82	78	74	80	76	74	72			72																
5	90	81	75	70	88	80	74	70	78	73	69	77	72	69	75	71	68	66			66																
6	85	76	69	65	84	75	69	64	73	68	64	72	67	63	70	66	63	61			61																
7	81	71	64	60	79	70	64	59	69	63	59	67	62	59	66	62	58	57			57																
8	76	66	60	55	75	66	59	55	64	59	55	63	58	55	62	58	54	53			53																
9	72	62	56	52	71	62	56	51	61	55	51	60	55	51	59	54	51	49			49																
10	69	58	52	48	68	58	52	48	57	52	48	56	51	48	56	51	48	46			46																

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	73695
5°	70597
10°	67044
15°	63196
20°	57125
25°	48360
30°	39379
35°	30825
40°	22950
45°	15428
50°	7471
55°	3699
60°	1875
65°	1180
70°	545
75°	487
80°	347
85°	692

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 15428 cd/sqm



TEST NUMBER: P643930

CATALOG NUMBER: ML5615LSWFL559FS1E - 691WB - 900LM - 5000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	120.0	9.3
10°-20°	310.0	24.1
20°-30°	365.3	28.4
30°-40°	288.2	22.4
40°-50°	151.3	11.8
50°-60°	38.7	3.0
60°-70°	9.2	0.7
70°-80°	2.4	0.2
80°-90°	1.0	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	795.3	61.8
0°-40°	1083.5	84.2
0°-60°	1273.5	99.0
0°-90°	1286.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1286.2	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1344	
5°	1283	120
15°	1114	310
25°	800	365
35°	461	288
45°	199	151
55°	39	39
65°	9	9
75°	2	2
85°	1	1
90°	0	



TEST NUMBER: P643930

CATALOG NUMBER: ML5615LSWFL559FS1E - 691WB - 900LM - 5000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	1344.3
2.5°	1327.3
5°	1282.9
7.5°	1240.8
10°	1204.4
12.5°	1162.4
15°	1113.5
17.5°	1052.0
20°	979.2
22.5°	892.8
25°	799.5
27.5°	706.3
30°	622.1
32.5°	539.1
35°	460.6
37.5°	387.8
40°	320.7
42.5°	258.2
45°	199.0
47.5°	133.1
50°	87.6
52.5°	59.1
55°	38.7
57.5°	25.0
60°	17.1
62.5°	12.5
65°	9.1
67.5°	5.7
70°	3.4
72.5°	2.3
75°	2.3
77.5°	2.3
80°	1.1
82.5°	1.1
85°	1.1
87.5°	1.1
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)