

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P643936

Luminaire Tested: ML5615LSWFL559FS1E - 692H - 1500LM - 2700K

Issue Date: 2/17/2023

**Test Information**

Test Method: LM-79-2019  
Report Number: P643936  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-61)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/17/2023  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: HALO  
Catalog Number: ML5615LSWFL559FS1E - 692H - 1500LM - 2700K  
Description: ML56 RR, 55D TIR OPTIC, 6" HAZE TRIM  
Light Source: (1) STANDARD SELECTABLE LUMEN LED 90CRI / 2700K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1752.4 lumens  
Efficiency: N/A  
Efficacy: 102.5 lumens/watt  
Spacing Criteria (0/90/45): 0.86 / 0.86 / 0.89  
Luminous Opening: Circular (Dia: 0.5' x H: 0')  
CIE Type: Direct


Input Watts (W): 17.1  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



TEST NUMBER: P643936

CATALOG NUMBER: ML5615LSWFL559FS1E - 692H - 1500LM - 2700K

### Luminous Intensity Polar Plot

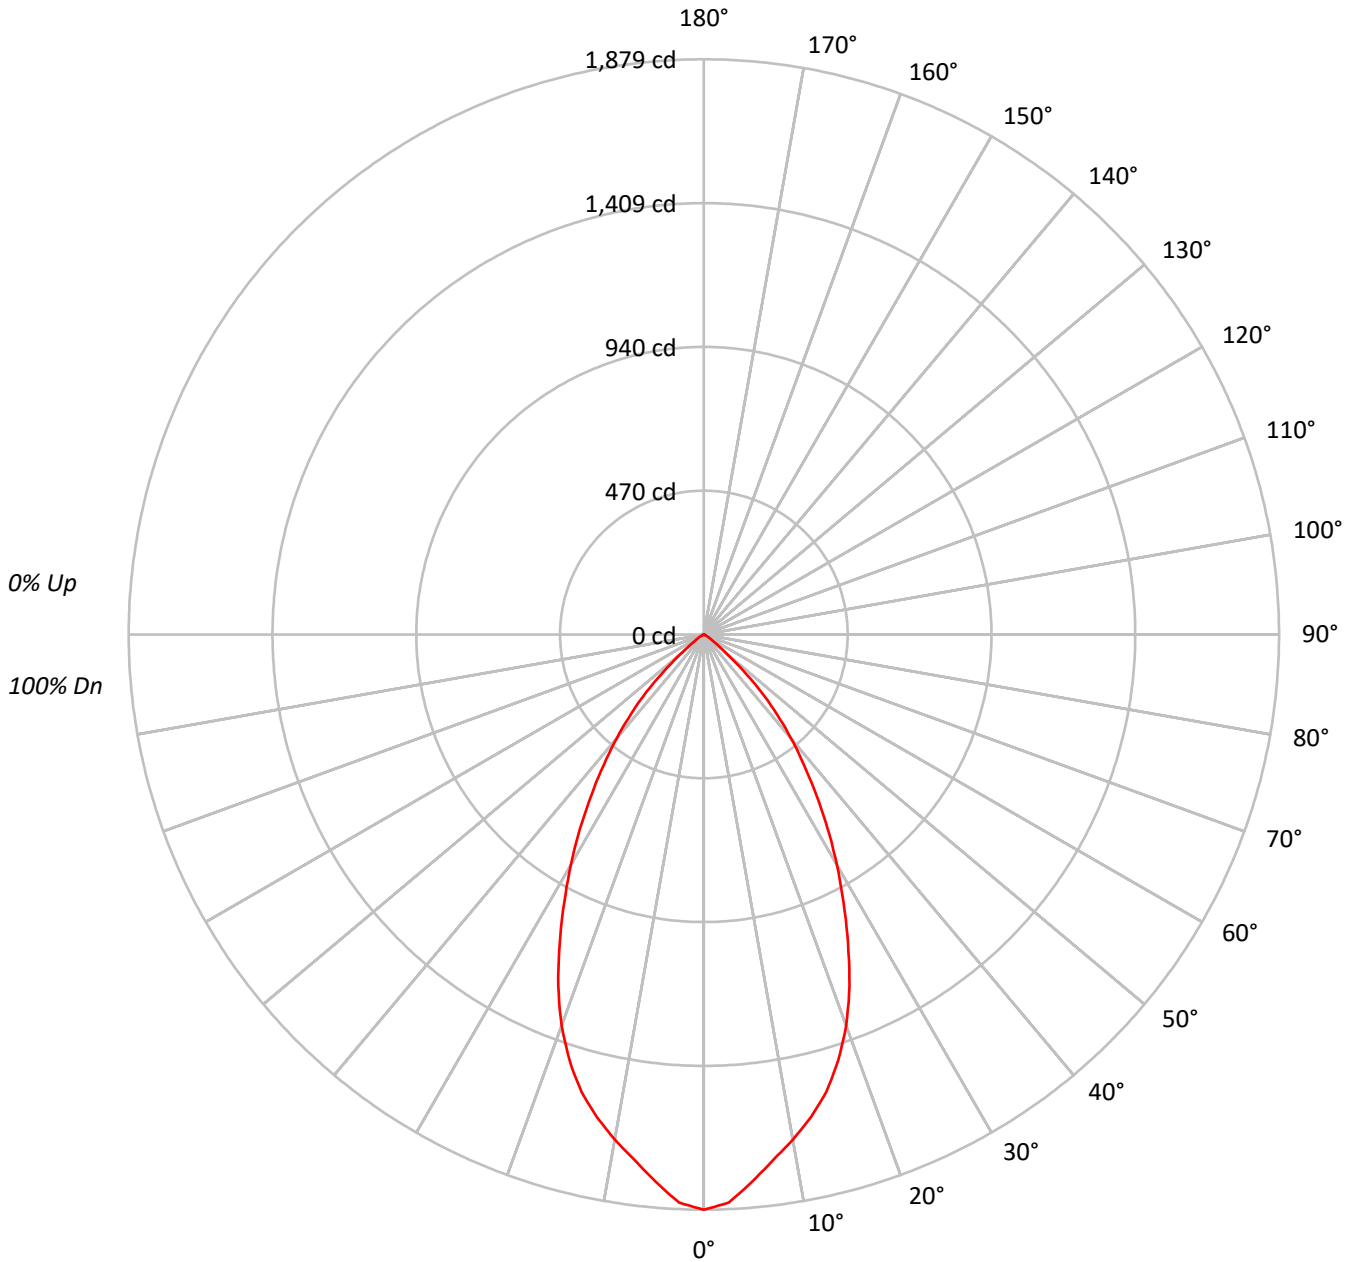



TEST NUMBER: P643936

CATALOG NUMBER: ML5615LSWFL559FS1E - 692H - 1500LM - 2700K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	110	108	105	111	108	106	104	104	102	101	100	99	98	97	96	95	93																			
2	107	102	98	94	105	100	97	93	97	94	91	94	92	89	91	89	87	86																			
3	101	95	89	85	99	93	88	85	91	87	83	88	85	82	86	83	81	79																			
4	96	88	82	78	94	87	81	77	85	80	76	83	79	75	81	77	74	73																			
5	91	82	76	71	89	81	75	71	79	74	70	77	73	70	76	72	69	67																			
6	86	76	70	66	84	76	70	65	74	69	65	73	68	64	71	67	64	62																			
7	81	71	65	61	80	71	65	60	69	64	60	68	63	60	67	63	59	58																			
8	77	67	61	56	76	66	60	56	65	60	56	64	59	56	63	59	55	54																			
9	73	63	57	52	72	62	56	52	61	56	52	60	56	52	60	55	52	50																			
10	69	59	53	49	68	59	53	49	58	53	49	57	52	49	56	52	49	47																			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	103024
5°	98795
10°	93268
15°	87764
20°	79323
25°	67377
30°	54951
35°	42891
40°	31731
45°	20622
50°	8494
55°	3269
60°	1535
65°	402
70°	256
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 20622 cd/sqm



TEST NUMBER: P643936

CATALOG NUMBER: ML5615LSWFL559FS1E - 692H - 1500LM - 2700K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	167.6	9.6
10°-20°	430.5	24.6
20°-30°	509.2	29.1
30°-40°	400.9	22.9
40°-50°	201.9	11.5
50°-60°	37.2	2.1
60°-70°	4.6	0.3
70°-80°	0.6	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1107.2	63.2
0°-40°	1508.2	86.1
0°-60°	1747.2	99.7
0°-90°	1752.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1752.4	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1879	
5°	1795	168
15°	1546	430
25°	1114	509
35°	641	401
45°	266	202
55°	34	37
65°	3	5
75°	0	1
85°	0	0
90°	0	



TEST NUMBER: P643936

CATALOG NUMBER: ML5615LSWFL559FS1E - 692H - 1500LM - 2700K

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	1879.3
2.5°	1857.5
5°	1795.3
7.5°	1731.5
10°	1675.5
12.5°	1614.8
15°	1546.4
17.5°	1459.2
20°	1359.7
22.5°	1243.0
25°	1113.9
27.5°	987.9
30°	868.1
32.5°	753.0
35°	640.9
37.5°	536.7
40°	443.4
42.5°	351.6
45°	266.0
47.5°	172.7
50°	99.6
52.5°	54.4
55°	34.2
57.5°	23.3
60°	14.0
62.5°	6.2
65°	3.1
67.5°	1.6
70°	1.6
72.5°	1.6
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)