

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P643953

Luminaire Tested: ML5615LSWFL559FS1E - 692SC - 1500LM - 3500K

Issue Date: 2/17/2023

**Test Information**

Test Method: LM-79-2019  
Report Number: P643953  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-60)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/17/2023  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: HALO  
Catalog Number: ML5615LSWFL559FS1E - 692SC - 1500LM - 3500K  
Description: ML56 RR, 55D TIR OPTIC, 6" SPECULAR CLEAR TRIM  
Light Source: (1) STANDARD SELECTABLE LUMEN LED 90CRI / 3500K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1859.7 lumens  
Efficiency: N/A  
Efficacy: 108.8 lumens/watt  
Spacing Criteria (0/90/45): 0.72 / 0.72 / 0.81  
Luminous Opening: Circular (Dia: 0.5' x H: 0')  
CIE Type: Direct


Input Watts (W): 17.1  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



TEST NUMBER: P643953

CATALOG NUMBER: ML5615LSWFL559FS1E - 692SC - 1500LM - 3500K

### Luminous Intensity Polar Plot

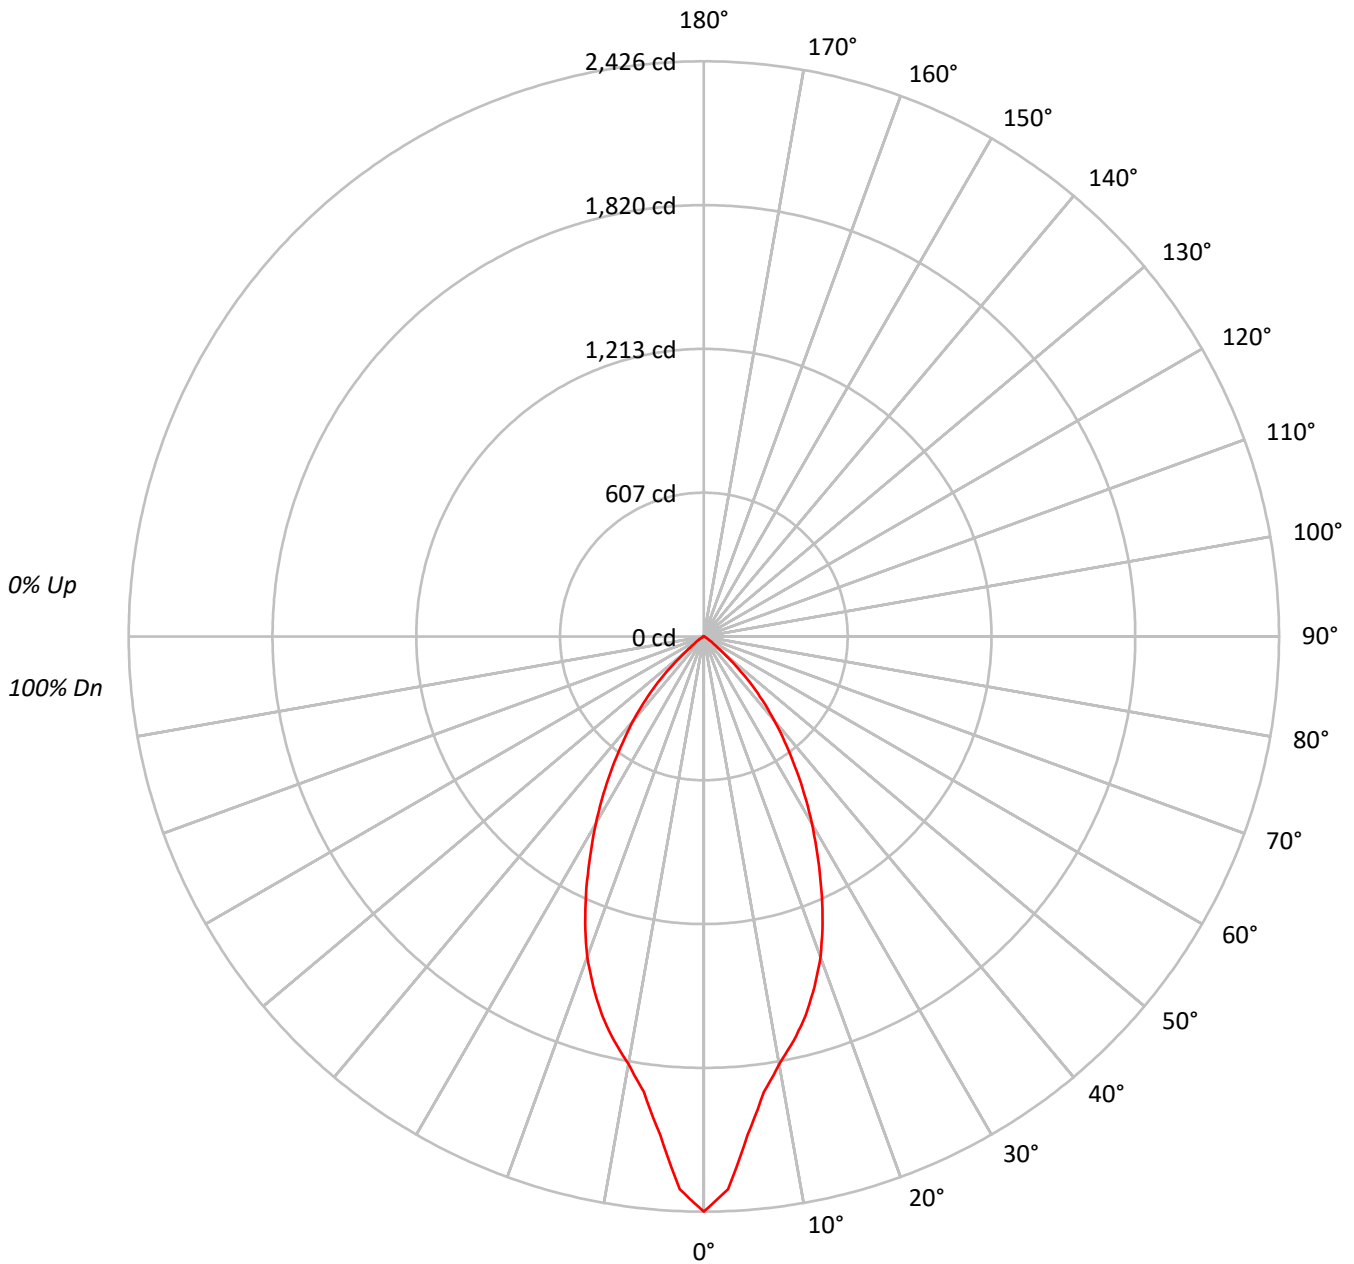



TEST NUMBER: P643953

CATALOG NUMBER: ML5615LSWFL559FS1E - 692SC - 1500LM - 3500K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	110	108	106	111	108	106	104	104	102	101	101	99	98	97	96	95	93																			
2	107	102	98	95	105	101	97	94	97	94	92	94	92	90	92	90	88	86																			
3	102	95	90	86	100	94	89	85	91	87	84	88	85	82	86	83	81	79																			
4	96	88	83	78	94	87	82	78	85	80	77	83	79	76	81	78	75	73																			
5	91	82	76	72	89	81	76	71	79	74	71	78	73	70	76	72	69	68																			
6	86	77	71	66	85	76	70	66	74	69	65	73	68	65	72	68	64	63																			
7	82	72	66	61	80	71	65	61	70	65	61	69	64	60	68	63	60	59																			
8	77	67	61	57	76	67	61	57	66	60	57	65	60	56	64	59	56	55																			
9	74	63	57	53	72	63	57	53	62	57	53	61	56	53	60	56	53	51																			
10	70	60	54	50	69	59	54	50	59	53	50	58	53	49	57	53	49	48																			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	132977
5°	116123
10°	101913
15°	94019
20°	83891
25°	70879
30°	57635
35°	44872
40°	33048
45°	21405
50°	8827
55°	3297
60°	1436
65°	428
70°	0
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 21405 cd/sqm



TEST NUMBER: P643953

CATALOG NUMBER: ML5615LSWFL559FS1E - 692SC - 1500LM - 3500K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	193.0	10.4
10°-20°	461.2	24.8
20°-30°	535.4	28.8
30°-40°	419.4	22.6
40°-50°	210.0	11.3
50°-60°	37.1	2.0
60°-70°	3.6	0.2
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1189.7	64.0
0°-40°	1609.1	86.5
0°-60°	1856.1	99.8
0°-90°	1859.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1859.7	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	2426	
5°	2110	193
15°	1657	461
25°	1172	535
35°	670	419
45°	276	210
55°	34	37
65°	3	4
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P643953

CATALOG NUMBER: ML5615LSWFL559FS1E - 692SC - 1500LM - 3500K

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	2425.7
2.5°	2333.7
5°	2110.2
7.5°	1937.6
10°	1830.8
12.5°	1747.0
15°	1656.6
17.5°	1549.8
20°	1438.0
22.5°	1308.2
25°	1171.8
27.5°	1035.4
30°	910.5
32.5°	788.9
35°	670.5
37.5°	560.4
40°	461.8
42.5°	366.5
45°	276.1
47.5°	179.1
50°	103.5
52.5°	54.2
55°	34.5
57.5°	21.4
60°	13.1
62.5°	4.9
65°	3.3
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)