

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P644018

Luminaire Tested: ML5615LSWFL559FS1E - 693TBZB - 900LM - 3500K

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-2019
Report Number: P644018
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-66)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML5615LSWFL559FS1E - 693TBZB - 900LM - 3500K
Description: ML56 RR, 55D TIR OPTIC, 6" TUSCON BRONZE BAFFLE TRIM
Light Source: (1) STANDARD SELECTABLE LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1171.8 lumens
Efficiency: N/A
Efficacy: 111.6 lumens/watt
Spacing Criteria (0/90/45): 0.86 / 0.86 / 0.89
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct

Input Watts (W): 10.5
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P644018
CATALOG NUMBER: ML5615LSWFL559FS1E - 693TBZB - 900LM - 3500K

Luminous Intensity Polar Plot

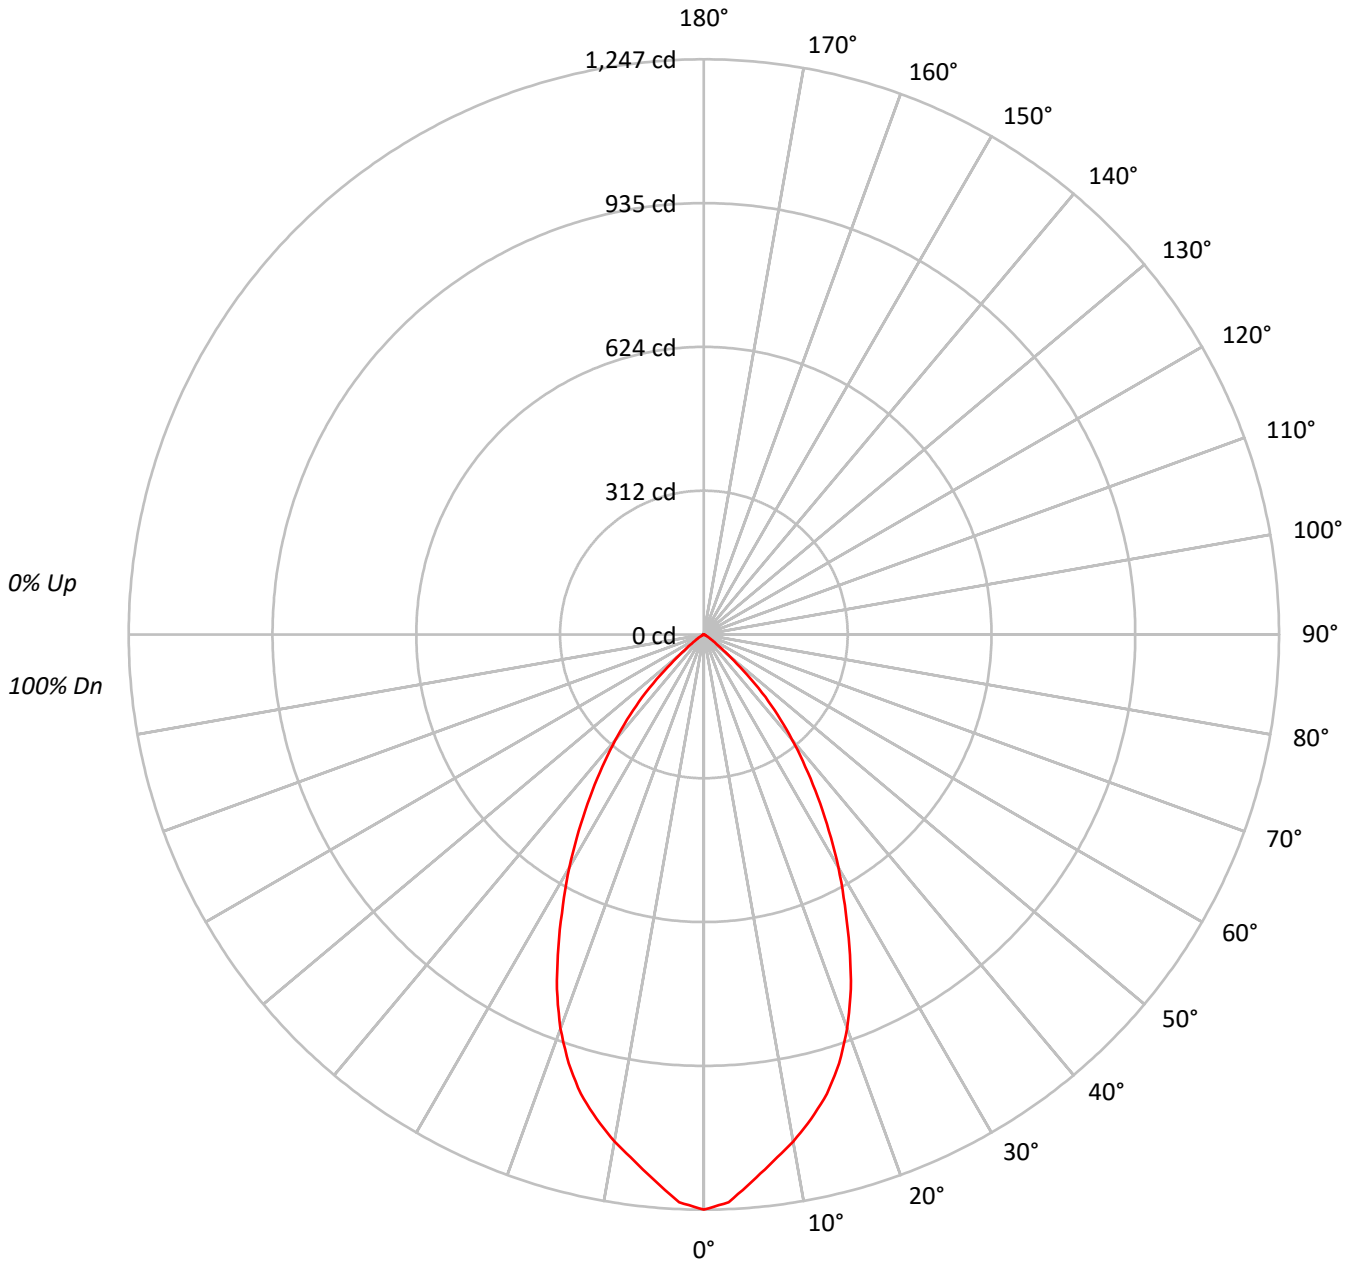



TEST NUMBER: P644018
 CATALOG NUMBER: ML5615LSWFL559FS1E - 693TBZB - 900LM - 3500K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10		0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	113	110	108	105	111	108	106	104	104	102	101	100	99	98	97	96	95	93		
2	107	102	98	94	105	100	97	93	97	94	91	94	92	89	91	89	87	86		
3	101	95	89	85	99	93	88	85	91	87	83	88	85	82	86	83	81	79		
4	96	88	82	78	94	87	81	77	85	80	76	83	79	75	81	77	74	73		
5	91	82	76	71	89	81	75	71	79	74	70	77	73	70	76	72	69	67		
6	86	76	70	66	84	76	70	65	74	69	65	73	68	64	71	67	64	62		
7	81	71	65	61	80	71	65	60	69	64	60	68	63	60	67	63	59	58		
8	77	67	61	56	76	66	60	56	65	60	56	64	59	56	63	59	55	54		
9	73	63	57	52	72	62	56	52	61	56	52	60	56	52	60	55	52	50		
10	69	59	53	49	68	59	53	49	58	53	49	57	52	49	56	52	49	47		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	68350
5°	65529
10°	62112
15°	58525
20°	53012
25°	45118
30°	36917
35°	28777
40°	21326
45°	13846
50°	5765
55°	2122
60°	932
65°	272
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 13846 cd/sqm



TEST NUMBER: P644018

CATALOG NUMBER: ML5615LSWFL559FS1E - 693TBZB - 900LM - 3500K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	111.4	9.5
10°-20°	287.2	24.5
20°-30°	341.0	29.1
30°-40°	269.3	23.0
40°-50°	135.6	11.6
50°-60°	24.4	2.1
60°-70°	2.8	0.2
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	739.6	63.1
0°-40°	1008.9	86.1
0°-60°	1168.9	99.8
0°-90°	1171.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1171.8	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1247	
5°	1191	111
15°	1031	287
25°	746	341
35°	430	269
45°	179	136
55°	22	24
65°	2	3
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P644018

CATALOG NUMBER: ML5615LSWFL559FS1E - 693TBZB - 900LM - 3500K

CANDELA DISTRIBUTION (FULL):

	0°
0°	1246.8
2.5°	1232.0
5°	1190.8
7.5°	1151.7
10°	1115.8
12.5°	1075.6
15°	1031.2
17.5°	975.2
20°	908.7
22.5°	832.6
25°	745.9
27.5°	661.4
30°	583.2
32.5°	505.0
35°	430.0
37.5°	361.4
40°	298.0
42.5°	236.7
45°	178.6
47.5°	115.2
50°	67.6
52.5°	35.9
55°	22.2
57.5°	14.8
60°	8.5
62.5°	4.2
65°	2.1
67.5°	1.1
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)