

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P644066

Luminaire Tested: ML5615LSWFL559FS1E - 696WB - 1200LM - 2700K

Issue Date: 2/17/2023

**Test Information**

Test Method: LM-79-2019  
Report Number: P644066  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2212-866-69)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/17/2023  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: HALO  
Catalog Number: ML5615LSWFL559FS1E - 696WB - 1200LM - 2700K  
Description: ML56 RR, 55D TIR OPTIC, 6" SHALLOW WHITE BAFFLE TRIM  
Light Source: (1) STANDARD SELECTABLE LUMEN LED 90CRI / 2700K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1435.5 lumens  
Efficiency: N/A  
Efficacy: 107.1 lumens/watt  
Spacing Criteria (0/90/45): 0.86 / 0.86 / 0.89  
Luminous Opening: Circular (Dia: 0.5' x H: 0')  
CIE Type: Direct


Input Watts (W): 13.4  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



TEST NUMBER: P644066

CATALOG NUMBER: ML5615LSWFL559FS1E - 696WB - 1200LM - 2700K

### Luminous Intensity Polar Plot

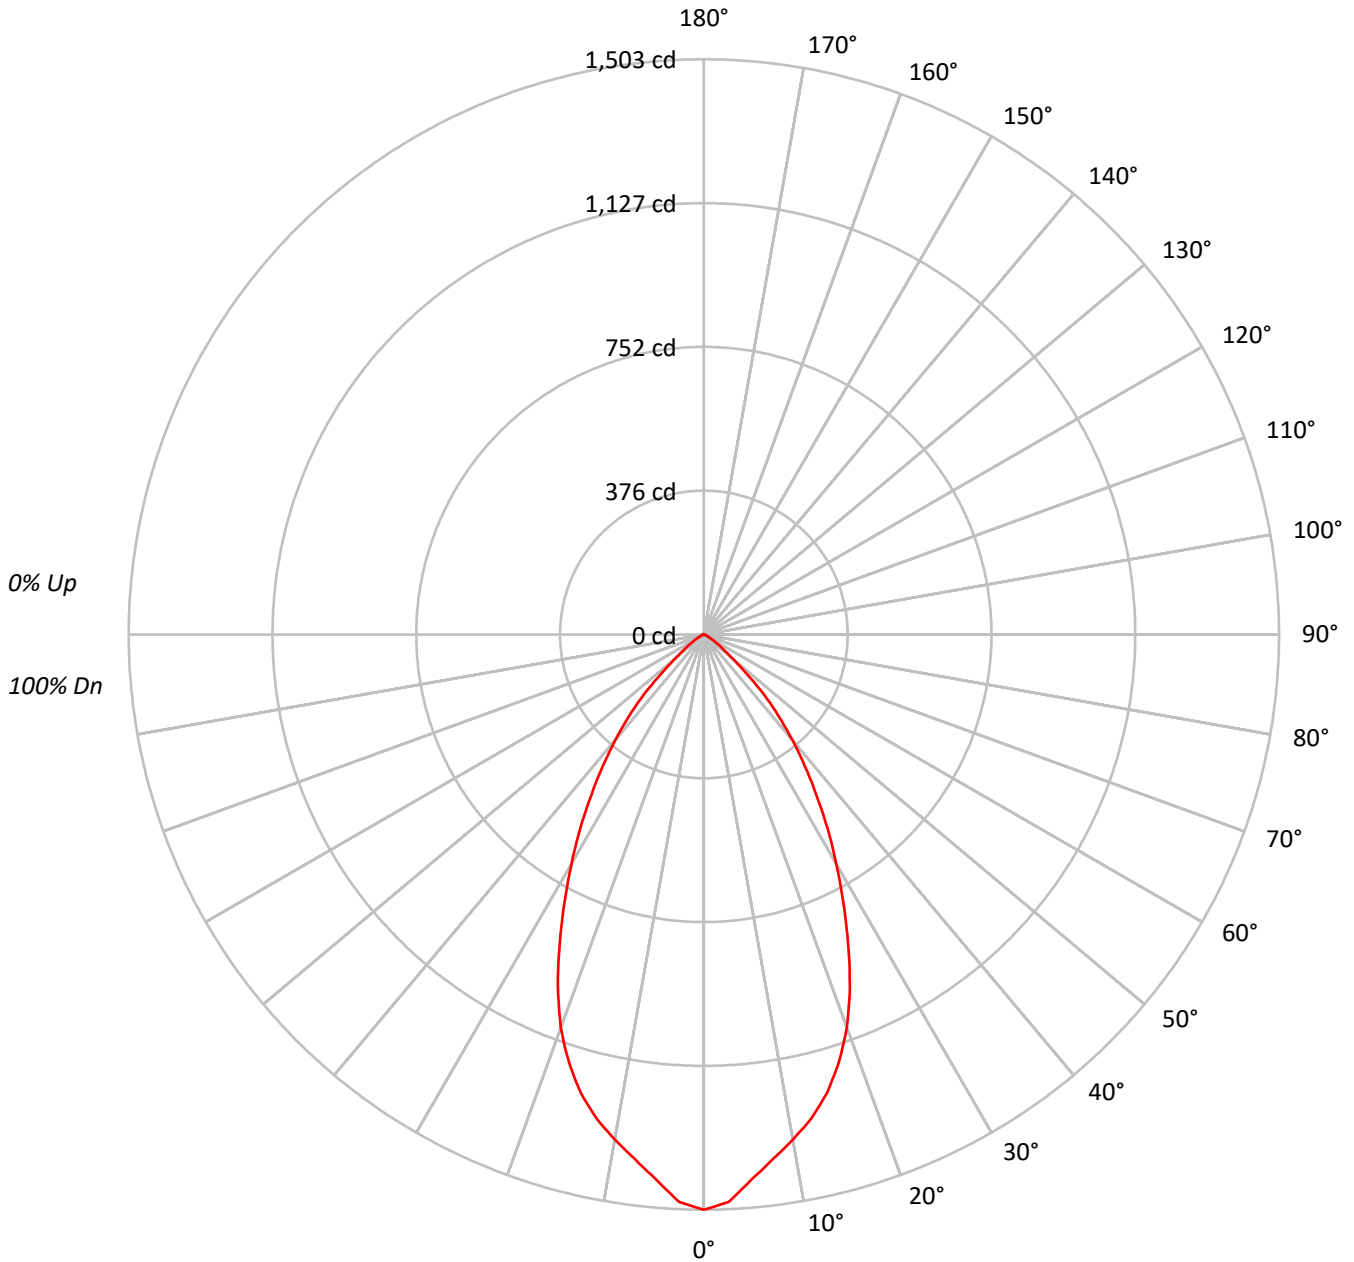



TEST NUMBER: P644066

CATALOG NUMBER: ML5615LSWFL559FS1E - 696WB - 1200LM - 2700K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100																
1	113	110	107	105	111	108	106	103	104	102	100	100	99	97	97	96	94	93			93																
2	107	102	97	94	105	100	96	93	97	93	91	94	91	89	91	89	87	85			85																
3	101	94	89	84	99	93	88	84	90	86	82	88	84	81	85	82	80	78			78																
4	95	87	81	77	93	86	81	76	84	79	75	82	78	74	80	76	74	72			72																
5	90	81	75	70	88	80	74	70	78	73	69	77	72	69	75	71	68	66			66																
6	85	76	69	65	84	75	69	64	73	68	64	72	67	63	70	66	63	61			61																
7	80	71	64	60	79	70	64	59	69	63	59	67	62	59	66	62	58	57			57																
8	76	66	60	55	75	65	59	55	64	59	55	63	58	55	62	58	54	53			53																
9	72	62	56	52	71	62	56	51	61	55	51	60	55	51	59	54	51	49			49																
10	69	58	52	48	68	58	52	48	57	52	48	56	51	48	56	51	48	46			46																

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	82400
5°	78676
10°	74587
15°	70443
20°	63770
25°	53955
30°	43811
35°	34291
40°	25712
45°	17165
50°	8307
55°	4349
60°	2215
65°	1479
70°	609
75°	530
80°	410
85°	818

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 17165 cd/sqm



TEST NUMBER: P644066

CATALOG NUMBER: ML5615LSWFL559FS1E - 696WB - 1200LM - 2700K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	133.8	9.3
10°-20°	345.5	24.1
20°-30°	407.6	28.4
30°-40°	321.5	22.4
40°-50°	168.5	11.7
50°-60°	44.0	3.1
60°-70°	11.0	0.8
70°-80°	2.7	0.2
80°-90°	0.9	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	886.9	61.8
0°-40°	1208.4	84.2
0°-60°	1420.9	99.0
0°-90°	1435.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1435.5	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1503	
5°	1430	134
15°	1241	346
25°	892	408
35°	512	321
45°	221	168
55°	46	44
65°	11	11
75°	2	3
85°	1	1
90°	0	



TEST NUMBER: P644066

CATALOG NUMBER: ML5615LSWFL559FS1E - 696WB - 1200LM - 2700K

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	1503.1
2.5°	1484.1
5°	1429.7
7.5°	1382.9
10°	1339.9
12.5°	1295.6
15°	1241.2
17.5°	1172.8
20°	1093.1
22.5°	997.0
25°	892.0
27.5°	788.2
30°	692.1
32.5°	601.0
35°	512.4
37.5°	434.0
40°	359.3
42.5°	288.5
45°	221.4
47.5°	146.8
50°	97.4
52.5°	65.8
55°	45.5
57.5°	29.1
60°	20.2
62.5°	15.2
65°	11.4
67.5°	6.3
70°	3.8
72.5°	2.5
75°	2.5
77.5°	2.5
80°	1.3
82.5°	1.3
85°	1.3
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)