

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO

Report Number: P#

Luminaire Tested: **RL56099S1EWH -5000K**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P#
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P27975)
Test Lab: INNOVATION CENTER(G2)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO
Catalog Number: RL56099S1EWH -5000K
Description: Halo RL 5/6in Downlight - SeleCCTable 5000K
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 969.0 lumens
Efficiency: N/A
Efficacy: 80.1 lumens/watt
Spacing Criteria (0/90/45): 1.14 / 1.14 / 1.22
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct

Input Watts (W): 12.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P#
CATALOG NUMBER: RL56099S1EWH -5000K

Luminous Intensity Polar Plot

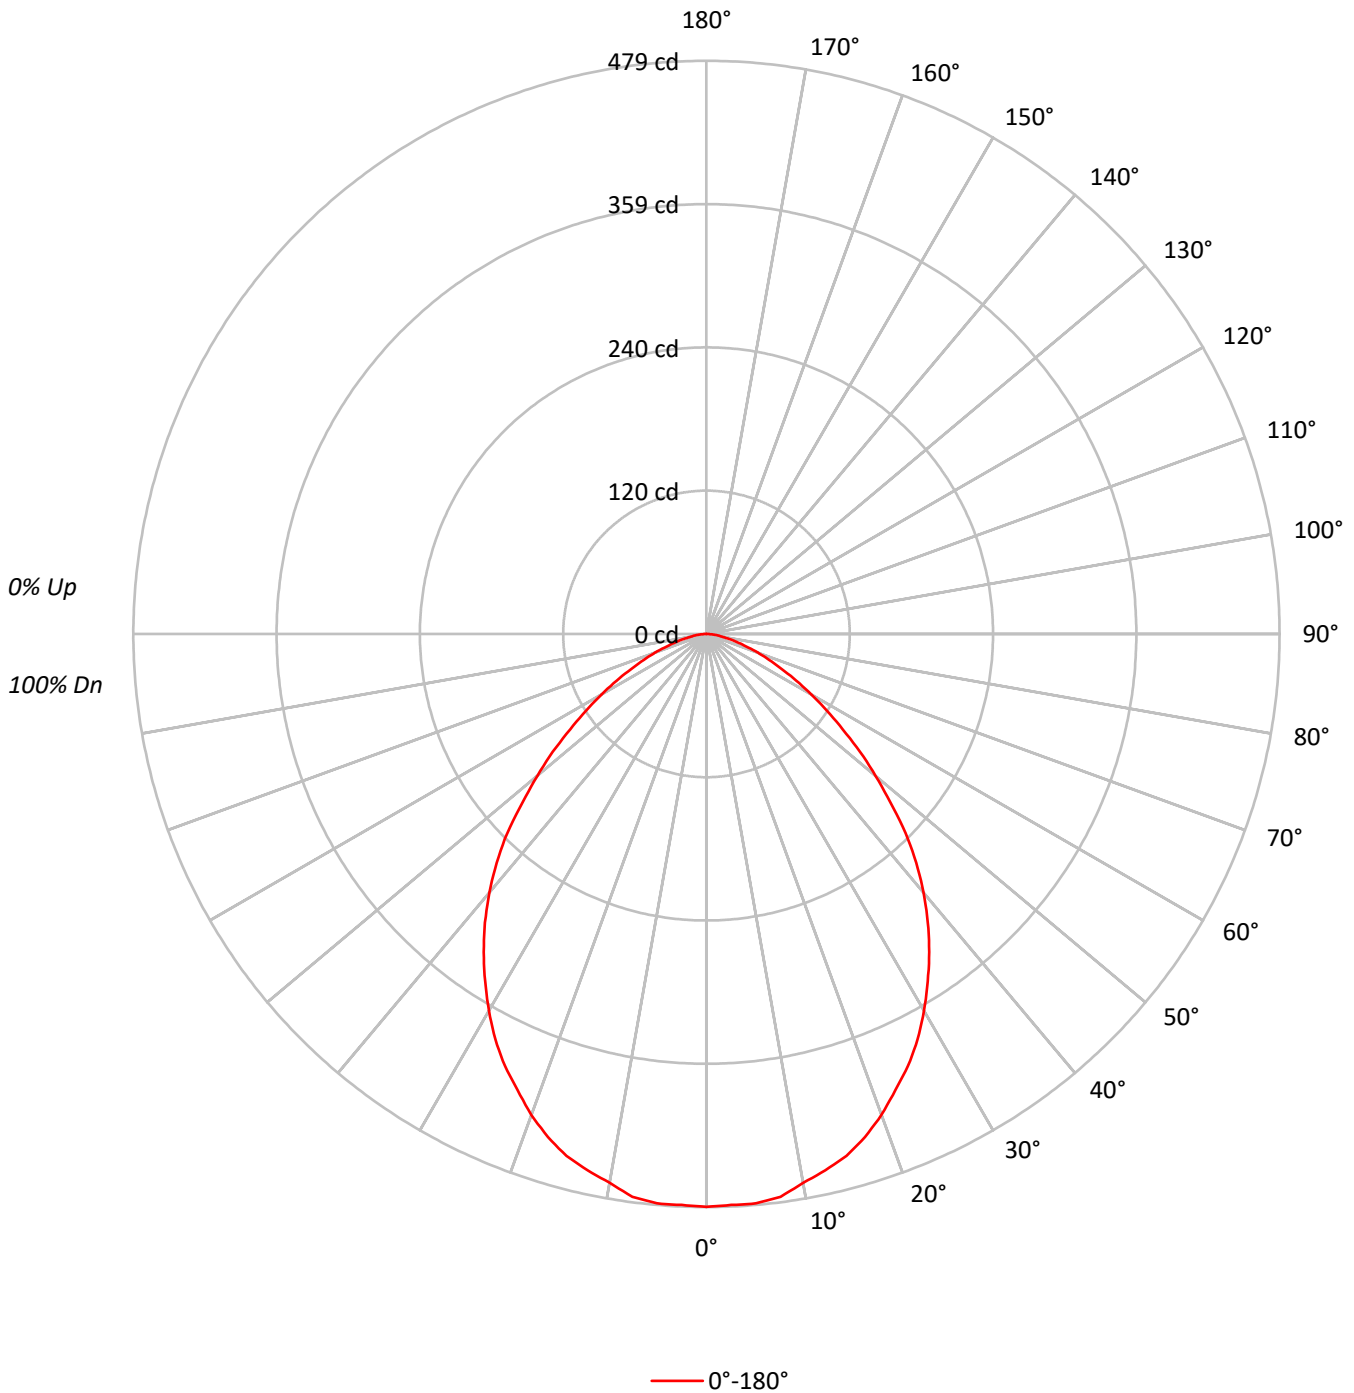



TEST NUMBER: P#

CATALOG NUMBER: RL56099S1EWH -5000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	111	107	103	100	108	104	101	98	100	98	95		96	94	92		93	91	90	88
2	102	95	89	84	100	93	88	83	90	85	81		87	83	80		84	81	78	76
3	94	85	78	72	92	84	77	72	81	75	70		78	73	69		76	72	68	66
4	87	77	69	63	85	75	68	62	73	67	62		71	65	61		69	64	60	58
5	81	69	61	55	79	68	61	55	66	59	54		64	58	54		62	57	53	51
6	75	63	55	49	73	62	54	49	60	53	48		59	53	48		57	52	48	46
7	70	58	49	44	68	57	49	44	55	48	43		54	48	43		53	47	43	41
8	65	53	45	40	64	52	45	39	51	44	39		50	44	39		49	43	39	37
9	61	49	41	36	60	48	41	36	47	40	36		46	40	36		45	40	35	34
10	58	45	38	33	56	45	38	33	44	37	33		43	37	33		42	36	32	31

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	26248
5°	26288
10°	25924
15°	25630
20°	24951
25°	24098
30°	23023
35°	21723
40°	20202
45°	18265
50°	15744
55°	13285
60°	11074
65°	9015
70°	7309
75°	5528
80°	4104
85°	3397



TEST NUMBER: P#

CATALOG NUMBER: RL56099S1EWH -5000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	45.2	4.7
10°-20°	126.9	13.1
20°-30°	183.0	18.9
30°-40°	202.5	20.9
40°-50°	180.4	18.6
50°-60°	125.6	13.0
60°-70°	70.1	7.2
70°-80°	28.9	3.0
80°-90°	6.5	0.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	355.1	36.6
0°-40°	557.6	57.5
0°-60°	863.5	89.1
0°-90°	969.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	969.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	479	
5°	478	45
15°	452	127
25°	398	183
35°	325	203
45°	236	180
55°	139	126
65°	70	70
75°	26	29
85°	5	7
90°	0	



TEST NUMBER: P#

CATALOG NUMBER: RL56099S1EWH -5000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	478.8
2.5°	477.7
5°	477.7
7.5°	474.4
10°	465.7
12.5°	459.2
15°	451.6
17.5°	440.8
20°	427.7
22.5°	412.5
25°	398.4
27.5°	382.1
30°	363.7
32.5°	344.2
35°	324.6
37.5°	304.0
40°	282.3
42.5°	259.5
45°	235.6
47.5°	208.4
50°	184.6
52.5°	161.8
55°	139.0
57.5°	119.4
60°	101.0
62.5°	84.7
65°	69.5
67.5°	56.5
70°	45.6
72.5°	34.7
75°	26.1
77.5°	19.5
80°	13.0
82.5°	9.8
85°	5.4
87.5°	2.2
90°	0.0

(END OF REPORT)