

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO

Report Number: P199329

Luminaire Tested: **LT560WH6927**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P199329
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P28069)
Test Lab: INNOVATION CENTER-P2
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO
Catalog Number: LT560WH6927
Description: 5/6" LT LED RECESSED DOWNLIGHT

Light Source: EATON LED 2700K
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 699.0 lumens
Efficiency: N/A
Efficacy: 69.9 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.21 / 1.27
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct

Input Watts (W): 10
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P199329
CATALOG NUMBER: LT560WH6927

Luminous Intensity Polar Plot

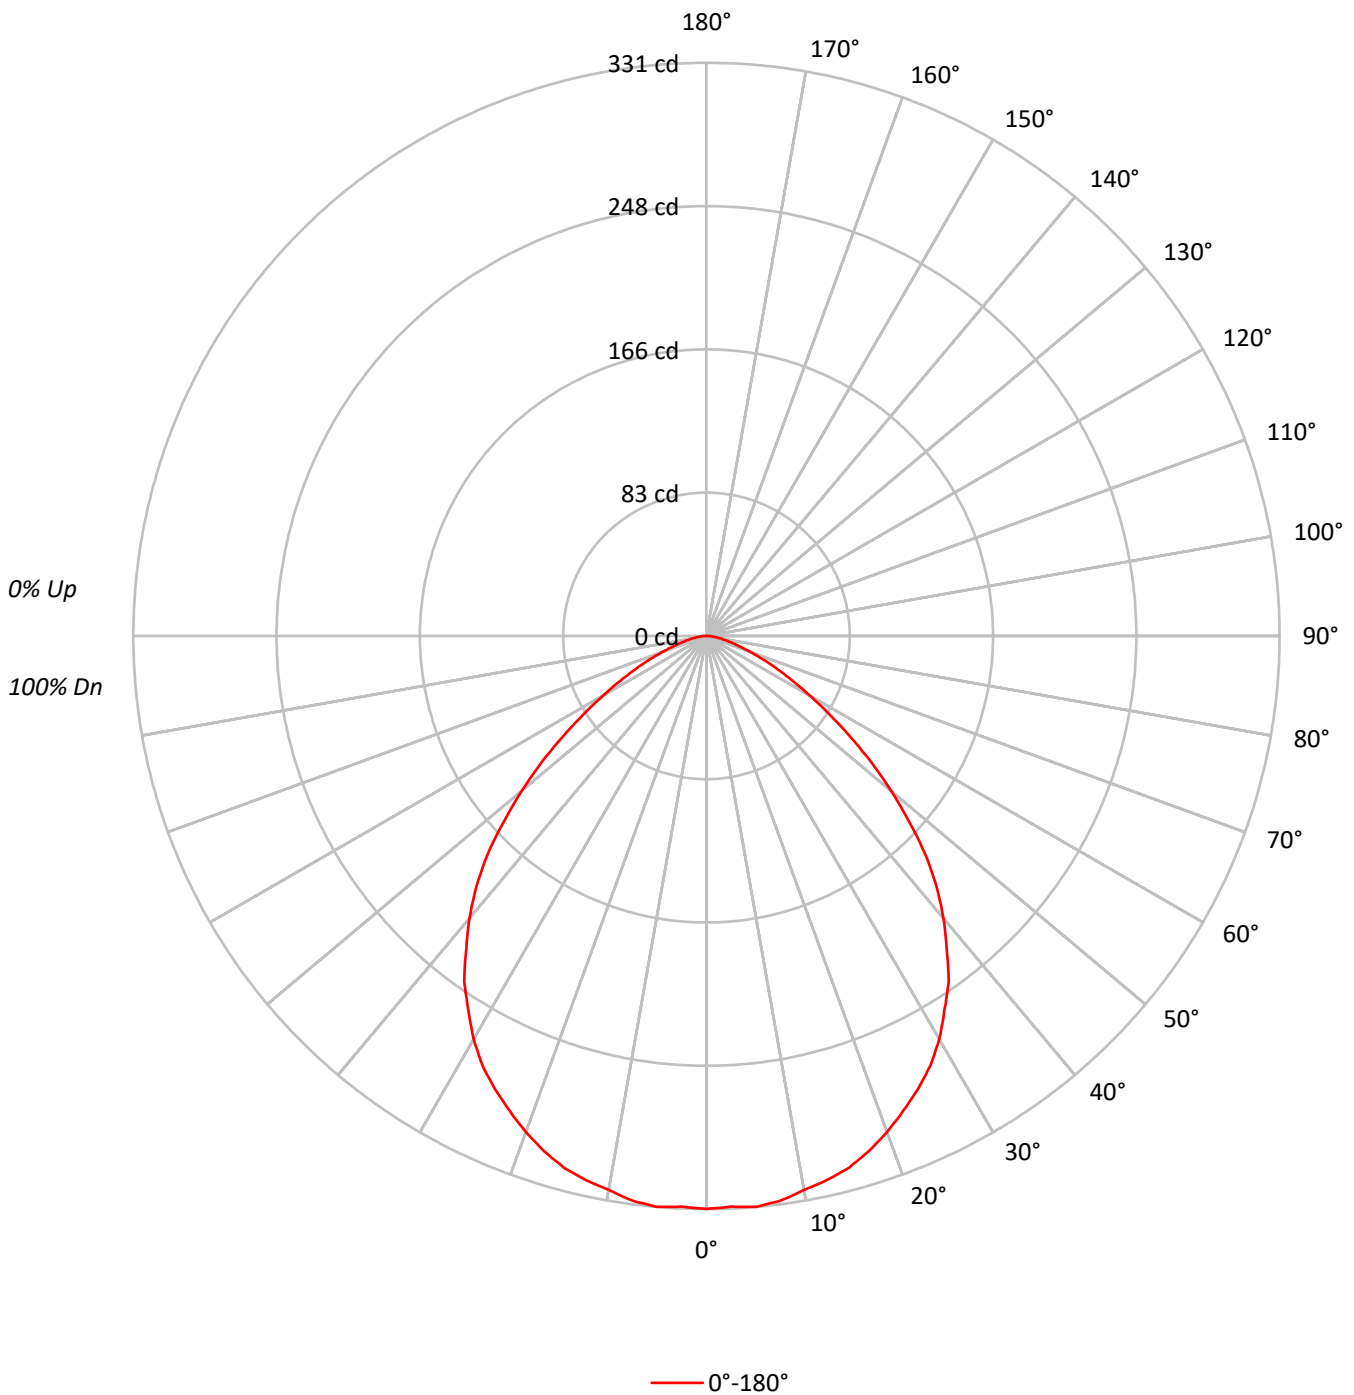



TEST NUMBER: P199329
 CATALOG NUMBER: LT560WH6927

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	111	107	103	100	108	105	102	99	101	98	96		97	95	93		93	92	90	88
2	102	96	90	85	100	94	88	84	90	86	82		87	83	80		84	81	78	77
3	95	86	78	73	92	84	77	72	81	76	71		78	74	70		76	72	69	67
4	87	77	69	63	85	76	68	63	73	67	62		71	66	61		69	64	60	59
5	81	70	62	56	79	68	61	55	66	60	55		65	59	54		63	58	54	52
6	75	63	55	49	73	62	55	49	61	54	49		59	53	48		57	52	48	46
7	70	58	50	44	68	57	49	44	55	49	44		54	48	43		53	47	43	41
8	65	53	45	40	64	52	45	40	51	44	39		50	44	39		49	43	39	37
9	61	49	41	36	60	48	41	36	47	40	36		46	40	36		45	40	35	34
10	58	45	38	33	56	45	38	33	44	37	33		43	37	33		42	36	32	31

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	18140
5°	18209
10°	18086
15°	18042
20°	17787
25°	17475
30°	17022
35°	16323
40°	15236
45°	13870
50°	11855
55°	9653
60°	7565
65°	5837
70°	4328
75°	3177
80°	2526
85°	1887



TEST NUMBER: P199329
 CATALOG NUMBER: LT560WH6927

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	31.4	4.5
10°-20°	89.5	12.8
20°-30°	132.9	19.0
30°-40°	151.4	21.7
40°-50°	136.8	19.6
50°-60°	91.1	13.0
60°-70°	45.4	6.5
70°-80°	16.7	2.4
80°-90°	3.8	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	253.7	36.3
0°-40°	405.2	58.0
0°-60°	633.1	90.6
0°-90°	699.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	699.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	331	
5°	331	31
15°	318	89
25°	289	133
35°	244	151
45°	179	137
55°	101	91
65°	45	45
75°	15	17
85°	3	4
90°	0	



TEST NUMBER: P199329
CATALOG NUMBER: LT560WH6927

CANDELA DISTRIBUTION (FULL):

	0°
0°	330.9
2.5°	329.9
5°	330.9
7.5°	328.9
10°	324.9
12.5°	321.9
15°	317.9
17.5°	311.9
20°	304.9
22.5°	296.9
25°	288.9
27.5°	279.9
30°	268.9
32.5°	255.9
35°	243.9
37.5°	227.9
40°	212.9
42.5°	196.9
45°	178.9
47.5°	158.9
50°	139.0
52.5°	120.0
55°	101.0
57.5°	84.0
60°	69.0
62.5°	56.0
65°	45.0
67.5°	35.0
70°	27.0
72.5°	20.0
75°	15.0
77.5°	11.0
80°	8.0
82.5°	5.0
85°	3.0
87.5°	2.0
90°	0.0

(END OF REPORT)