

LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: HALO

Report Number: P645293

Luminaire Tested: **RLNL6109FSD2W1EWH-4000K**

Issue Date: 02/28/2023

Tested By:

Approved By:



Cooper Lighting Solutions laboratories have been accredited by National Voluntary Laboratory Accreditation Program (NVLAP) that it adheres to the requirements of ISO/IEC 17025:2005 and appropriate IESNA test methods. This report must not be used to claim product certification, approval or endorsement by NVLAP, NIST or any agency of the Federal Government. Results contained in this report are valid for luminaire sample tested, as supplied by requestor. Information related to the luminaire tested has been supplied by requestor and can affect the validity of the test results. Report shall not be reproduced except in full without approval of Cooper Lighting Solutions Lighting Laboratory. Test performed at address noted above.

Test Information

Test Method: LM-79-08
 Report Number: P645293
 Test Lab: ETA Testing Technology
 Issue Date: 02/28/2023
 Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
 Product Line: HALO
 Catalog Number: RLNL6109FSD2W1EWH-4000K
 Description: 6" 90 CRI COLOR TUNING RECESSED DOWNLIGHT RETROFIT DIM TO WARM
 FIXTURE w/ NIGHTLIGHT
 Light Source: 90 CRI 4000K LEDS
 Ballast/Driver: ELECTRICAL DRIVER

Summary


Lumens per Lamp: N/A
 Luminaire Lumens: 1065.4 lumens
 Efficiency: N/A
 Efficacy: 102.4 lumens/watt
 Spacing Criteria (0/90/45): 1.23 / 1.23 / 1.33
 Luminous Opening: Circular (Dia: 0.35' x H: 0')
 CIE Type: Direct

Input Watts (W): 10.4
 Input Voltage (V): 120
 Input Current (Ain): NR
 Voltage Rise (V): NR
 Power Factor: NR
 Total Harmonic Distortion (THDi): NR
 Frequency (hertz): 60
 Stabilization Time: NR
 Operation Time: NR
 Ambient Temperature (°C): NR
 Test Distance: 25 FT

Measurement and Test Equipment			
Instrument	Identification Number	Calibration Date	Calibration Due Date
Photometer	GONIO 1 IN0055	4/22/2021	10/22/2021
Power Meter	XITRON 2801 IN0197	12/1/2020	12/1/2021
AC Power Source	CHROMA 61505 IN0196	12/1/2020	12/1/2021
DC Power Supply	AGILENT E3634A IN0198	11/30/2020	11/30/2021

TEST NUMBER: P645293
CATALOG NUMBER: RLNL6109FSD2W1EWH-4000K

Luminous Intensity Polar Plot

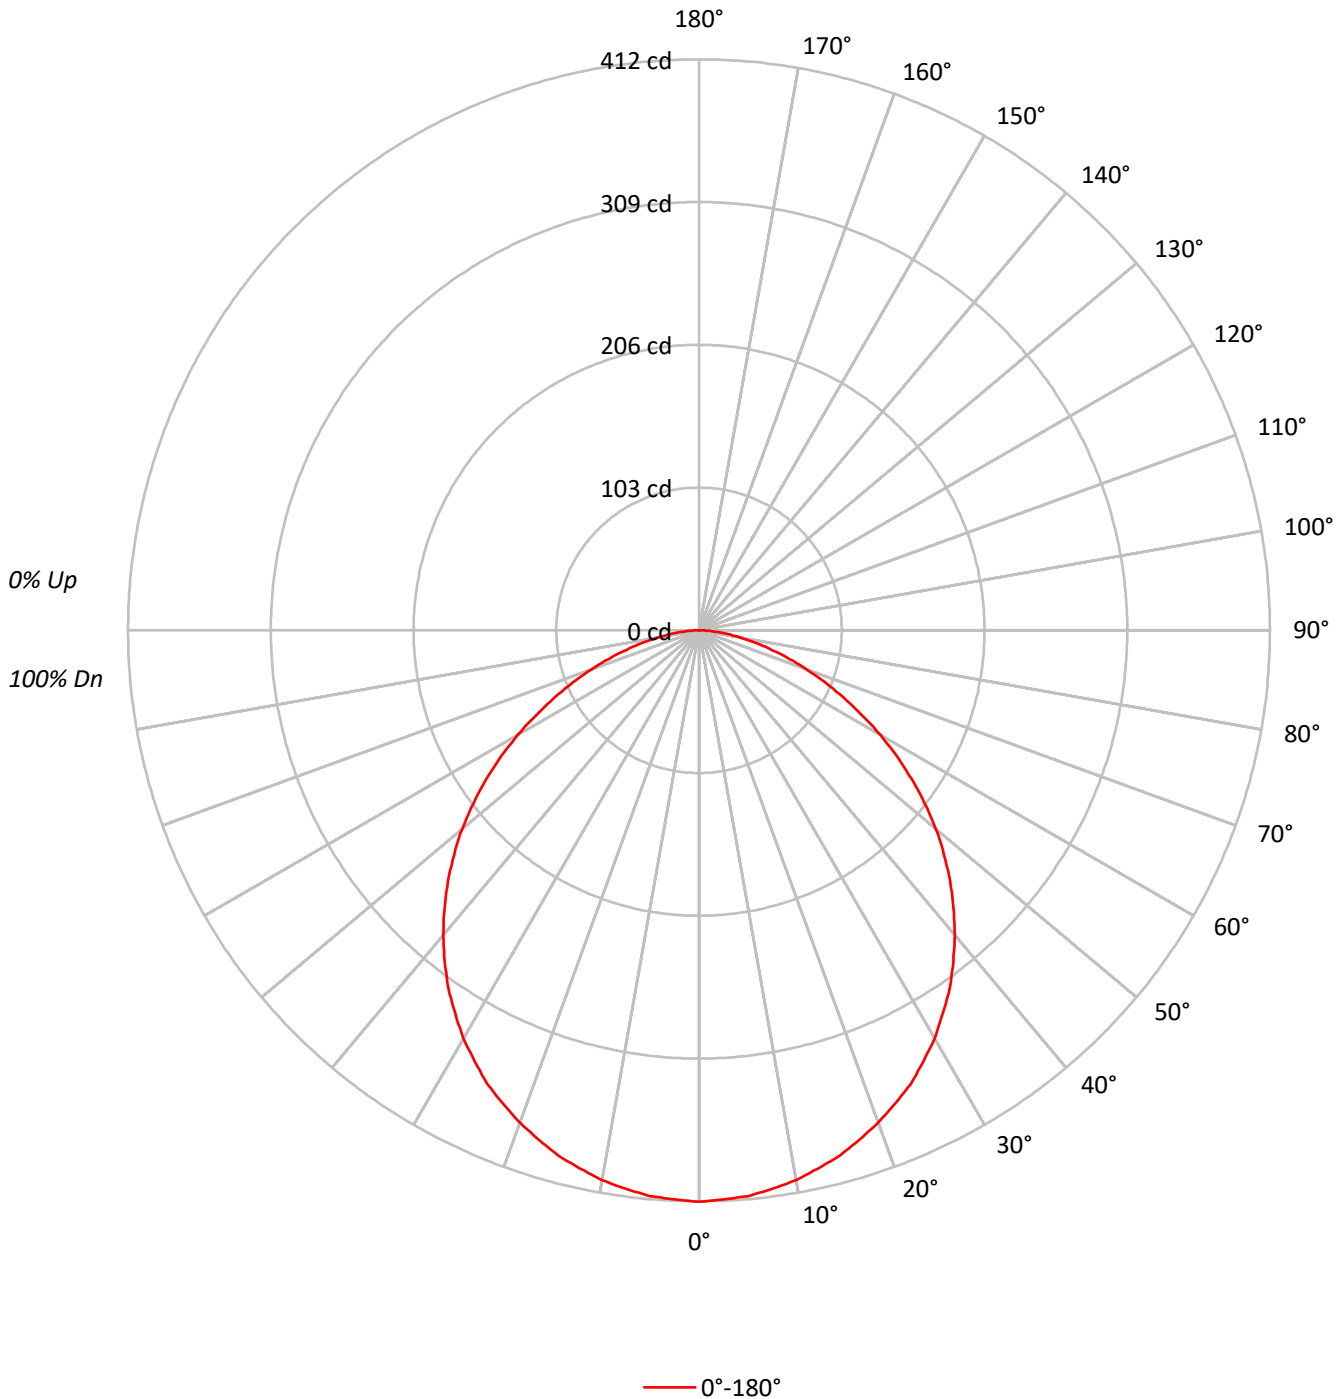

TEST NUMBER: P645293
 CATALOG NUMBER: RLNL6109FSD2W1EWH-4000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	109	105	101	97	107	103	99	96	98	95	93		94	92	90		91	89	87	85
2	100	92	85	80	97	90	84	79	87	82	77		83	79	75		80	77	74	72
3	91	81	73	67	89	80	72	66	77	70	65		74	69	64		71	67	63	61
4	84	72	64	57	82	71	63	57	68	61	56		66	60	55		64	59	54	52
5	77	65	56	49	75	64	55	49	61	54	49		59	53	48		58	52	48	45
6	71	58	50	43	69	57	49	43	56	48	43		54	47	42		52	47	42	40
7	66	53	44	38	65	52	44	38	51	43	38		49	43	38		48	42	37	35
8	62	48	40	34	60	48	40	34	46	39	34		45	39	34		44	38	34	32
9	58	44	36	31	56	44	36	31	43	36	31		42	35	31		41	35	30	29
10	54	41	33	28	53	41	33	28	40	33	28		39	32	28		38	32	28	26

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	45048
5°	44935
10°	44700
15°	44375
20°	43963
25°	43545
30°	42883
35°	42069
40°	40963
45°	39603
50°	37939
55°	35698
60°	32975
65°	29705
70°	26323
75°	22923
80°	19128
85°	14166

TEST NUMBER: P645293
 CATALOG NUMBER: RLNL6109FSD2W1EWH-4000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	38.9	3.7
10°-20°	110.7	10.4
20°-30°	166.3	15.6
30°-40°	197.0	18.5
40°-50°	197.5	18.5
50°-60°	167.5	15.7
60°-70°	114.6	10.8
70°-80°	58.4	5.5
80°-90°	14.6	1.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	315.8	29.6
0°-40°	512.9	48.1
0°-60°	877.9	82.4
0°-90°	1065.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1065.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	412	
5°	410	39
15°	392	111
25°	361	166
35°	315	197
45°	256	198
55°	187	167
65°	115	115
75°	54	58
85°	11	15
90°	1	

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269


NVLAP Lab Code: 200050-0



TEST NUMBER: P645293
CATALOG NUMBER: RLNL6109FSD2W1EWH-4000K

CANDELA DISTRIBUTION (FULL):

	0°
0°	412.3
5°	409.7
10°	402.9
15°	392.3
20°	378.1
25°	361.2
30°	339.9
35°	315.4
40°	287.2
45°	256.3
50°	223.2
55°	187.4
60°	150.9
65°	114.9
70°	82.4
75°	54.3
80°	30.4
85°	11.3
90°	0.6

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269


NVLAP Lab Code: 200050-0



Report Generated By 670245763 / DESKTOP-DVLU35A

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269


NVLAP Lab Code: 200050-0



Room Thermometer	ONSET IN0143	12/1/2020	12/1/2021
------------------	--------------	-----------	-----------

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269


NVLAP Lab Code: 200050-0



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269


NVLAP Lab Code: 200050-0



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269


NVLAP Lab Code: 200050-0



(END OF REPORT)