

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: HALO

Report Number: P626475

Luminaire Tested: HLBC6LS9FSD2WE010MWR-4000K-1200lm

Issue Date: 11/17/2022

Test Information

Test Method: LM-79-2019
Report Number: P626475
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (A2209543B001)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 11/17/2022
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: HLBC6LS9FSD2WE010MWR-4000K-1200lm
Description: 6IN CANLESS LED DOWNLIGHT WITH SELECTABLE CCT AND SELECTABLE LUMEN OUTPUT
Light Source: (1) 4000K CCT, 90 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1310.0 lumens
Efficiency: N/A
Efficacy: 79.9 lumens/watt
Spacing Criteria (0/90/45): 1.24 / 1.24 / 1.34
Luminous Opening: Circular (Dia: 0.5m x H: 0m)
CIE Type: Direct

Input Watts (W): 16.4
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P626475
CATALOG NUMBER: HLBC6LS9FSD2WE010MWR-4000K-1200lm

Luminous Intensity Polar Plot

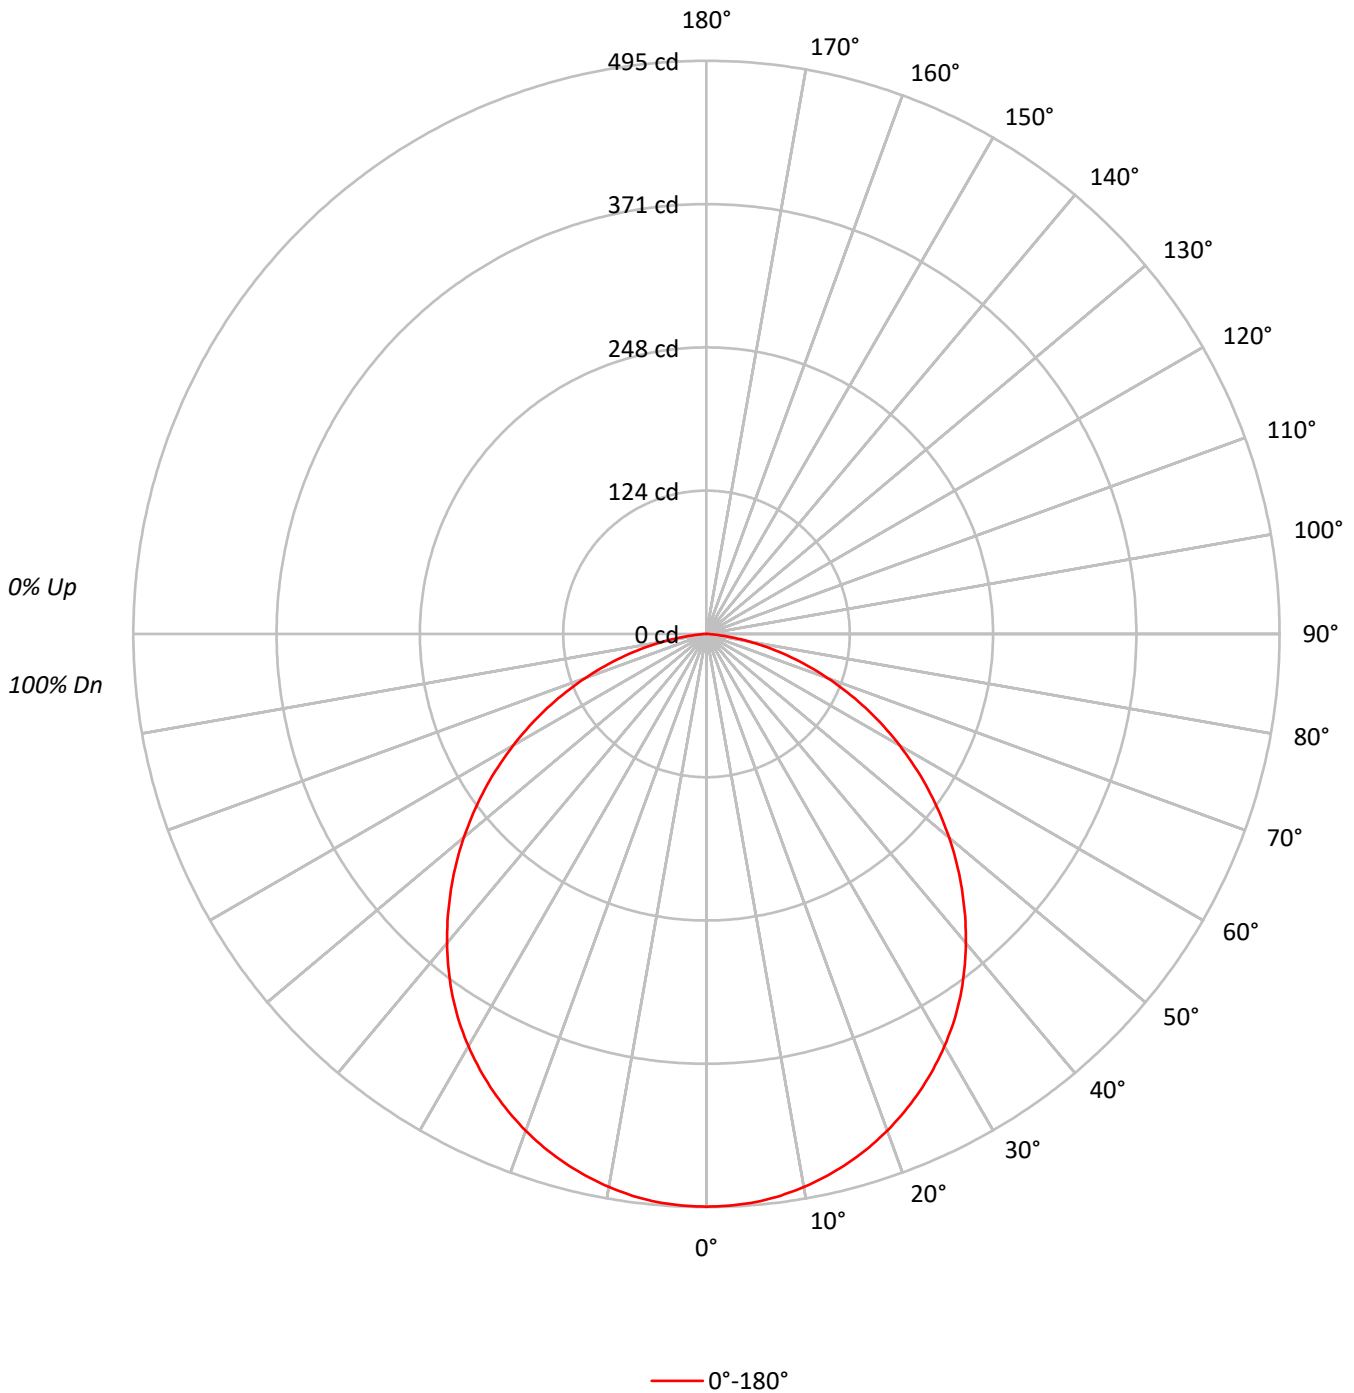



TEST NUMBER: P626475

CATALOG NUMBER: HLBC6LS9FSD2WE010MWR-4000K-1200lm

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	109	105	101	97	107	103	99	96	98	95	92		94	92	90		91	89	87	85
2	100	92	85	80	97	90	84	79	86	81	77		83	79	75		80	77	73	71
3	91	81	73	67	89	79	72	66	76	70	65		74	68	64		71	66	63	60
4	83	72	63	57	81	70	62	56	68	61	55		66	60	55		63	58	54	52
5	77	64	55	49	75	63	55	49	61	54	48		59	53	48		57	52	47	45
6	71	58	49	43	69	57	49	43	55	48	42		53	47	42		52	46	41	39
7	66	53	44	38	64	52	44	38	50	43	37		49	42	37		47	41	37	35
8	61	48	40	34	60	47	39	34	46	39	33		45	38	33		44	38	33	31
9	57	44	36	30	56	43	36	30	42	35	30		41	35	30		40	34	30	28
10	54	41	33	28	53	40	33	28	39	32	27		38	32	27		37	31	27	25

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	2519
5°	2518
10°	2508
15°	2494
20°	2475
25°	2450
30°	2418
35°	2377
40°	2317
45°	2247
50°	2168
55°	2074
60°	1964
65°	1831
70°	1659
75°	1431
80°	1082
85°	421

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 2247 cd/sqm



TEST NUMBER: P626475

CATALOG NUMBER: HLBC6LS9FSD2WE010MWR-4000K-1200lm

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	46.8	3.6
10°-20°	133.4	10.2
20°-30°	200.8	15.3
30°-40°	238.8	18.2
40°-50°	240.6	18.4
50°-60°	208.7	15.9
60°-70°	150.3	11.5
70°-80°	77.1	5.9
80°-90°	13.4	1.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	381.0	29.1
0°-40°	619.8	47.3
0°-60°	1069.1	81.6
0°-90°	1310.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1310.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	495	
5°	492	47
15°	473	133
25°	436	201
35°	382	239
45°	312	241
55°	234	209
65°	152	150
75°	73	77
85°	7	13
90°	0	



TEST NUMBER: P626475
CATALOG NUMBER: HLBC6LS9FSD2WE010MWR-4000K-1200lm

CANDELA DISTRIBUTION (FULL):

	0°
0°	494.7
2.5°	494.1
5°	492.5
7.5°	489.4
10°	485.0
12.5°	479.7
15°	473.0
17.5°	465.4
20°	456.6
22.5°	446.6
25°	435.9
27.5°	424.0
30°	411.2
32.5°	397.4
35°	382.3
37.5°	365.9
40°	348.5
42.5°	330.6
45°	312.0
47.5°	293.1
50°	273.6
52.5°	253.7
55°	233.6
57.5°	213.3
60°	192.8
62.5°	172.4
65°	151.9
67.5°	131.5
70°	111.4
72.5°	91.7
75°	72.7
77.5°	54.2
80°	36.9
82.5°	21.1
85°	7.2
87.5°	2.5
90°	0.1

(END OF REPORT)