

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: HALO

Report Number: P257055

Luminaire Tested: **L806SMFL8030MB**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P257055
Test Lab: INNOVATION CENTER(G2)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO
Catalog Number: L806SMFL8030MB
Description: HALO LED SMALL OUTPUT TRACK FIXTURE 06 WITH FLOOD OPTIC, MATTE BLACK
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-1805-754-12)
Light Source: (5) 3000K CCT, 80 CRI LEDS
Ballast/Driver: ELECTRICAL DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1067.1 lumens
Efficiency: N/A
Efficacy: 91.2 lumens/watt
Spacing Criteria (0/90/45): 0.82 / 0.82 / 0.72
Luminous Opening: Circular (Dia: 0.17' x H: 0')
CIE Type: Direct

Input Watts (W): 11.7
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P257055
CATALOG NUMBER: L806SMFL8030MB

Luminous Intensity Polar Plot

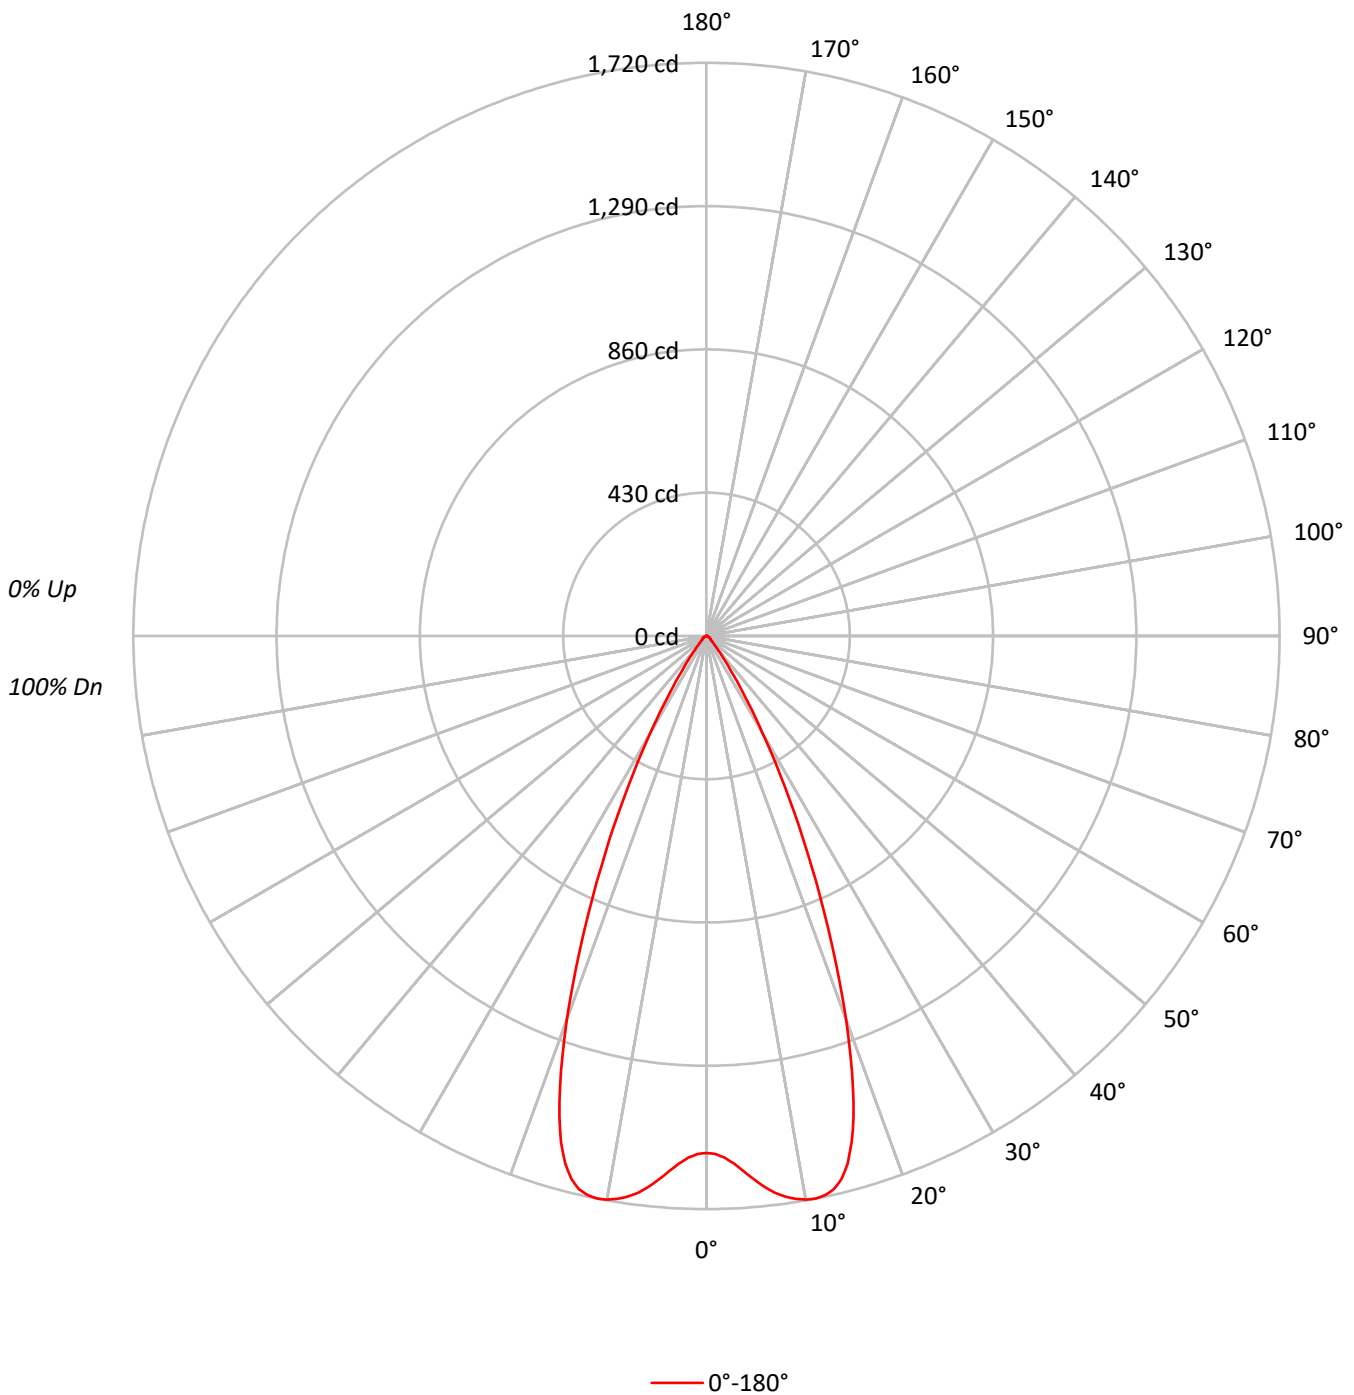



TEST NUMBER: P257055

CATALOG NUMBER: L806SMFL8030MB

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	114	111	109	107	112	109	107	105	105	104	102		102	100	99		98	97	96	95
2	109	105	101	98	107	103	100	97	100	97	95		97	95	93		94	92	91	89
3	104	99	94	91	103	97	93	90	95	91	89		92	90	87		90	88	86	84
4	100	93	88	85	98	92	88	84	90	86	83		88	85	82		86	84	81	80
5	96	88	83	79	94	88	83	79	86	82	78		84	81	78		83	80	77	76
6	92	84	79	75	91	83	78	75	82	77	74		81	77	74		79	76	73	72
7	88	80	75	71	87	79	74	71	78	74	70		77	73	70		76	72	70	68
8	85	76	71	67	84	76	71	67	75	70	67		74	70	67		73	69	66	65
9	81	73	68	64	80	72	67	64	72	67	64		71	67	64		70	66	63	62
10	78	70	65	61	77	69	64	61	69	64	61		68	64	61		67	63	61	60

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	765528
5°	810797
10°	860502
15°	836715
20°	643493
25°	390541
30°	192617
35°	78179
40°	33040
45°	17583
50°	12358
55°	11268
60°	9966
65°	8172
70°	7213
75°	5719
80°	5683
85°	5661



TEST NUMBER: P257055

CATALOG NUMBER: L806SMFL8030MB

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	159.2	14.9
10°-20°	439.5	41.2
20°-30°	329.5	30.9
30°-40°	93.8	8.8
40°-50°	21.8	2.0
50°-60°	11.9	1.1
60°-70°	7.3	0.7
70°-80°	3.3	0.3
80°-90°	0.8	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	928.2	87.0
0°-40°	1022.0	95.8
0°-60°	1055.7	98.9
0°-90°	1067.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1067.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1552	
5°	1637	159
15°	1638	440
25°	717	329
35°	130	94
45°	25	22
55°	13	12
65°	7	7
75°	3	3
85°	1	1
90°	0	



TEST NUMBER: P257055

CATALOG NUMBER: L806SMFL8030MB

CANDELA DISTRIBUTION (FULL):

0°	
0°	1551.6
1°	1554.6
2°	1566.7
3°	1585.8
4°	1611.0
5°	1637.1
6°	1662.3
7°	1683.4
8°	1699.5
9°	1710.6
10°	1717.6
11°	1719.6
12°	1715.6
13°	1703.5
14°	1678.4
15°	1638.1
16°	1581.8
17°	1509.3
18°	1422.8
19°	1327.2
20°	1225.6
21°	1119.9
22°	1011.3
23°	907.6
24°	810.0
25°	717.4
26°	629.9
27°	547.4
28°	469.9
29°	400.5
30°	338.1
32.5°	214.3
35°	129.8
37.5°	80.5
40°	51.3
42.5°	35.2
45°	25.2
47.5°	20.1
50°	16.1
52.5°	15.1
55°	13.1
57.5°	12.1
60°	10.1
62.5°	9.1
65°	7.0



TEST NUMBER: P257055

CATALOG NUMBER: L806SMFL8030MB

CANDELA DISTRIBUTION (continued):

	0°
67.5°	6.0
70°	5.0
72.5°	4.0
75°	3.0
77.5°	2.0
80°	2.0
82.5°	1.0
85°	1.0
87.5°	0.0
90°	0.0

(END OF REPORT)