

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: HALO

Report Number: P328478

Luminaire Tested: **L815MED30FL927MB**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P328478
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1905-290-12)
Test Lab: INNOVATION CENTER(G3)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO
Catalog Number: L815MED30FL927MB
Description: Medium, 3000lm, 45D, 2700K, black finish
Light Source: (1) 2700K CCT, 90 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2390.9 lumens
Efficiency: N/A
Efficacy: 63.4 lumens/watt
Spacing Criteria (0/90/45): 0.75 / 0.75 / 0.66
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct


Input Watts (W): 37.7
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P328478

CATALOG NUMBER: L815MED30FL927MB

Luminous Intensity Polar Plot

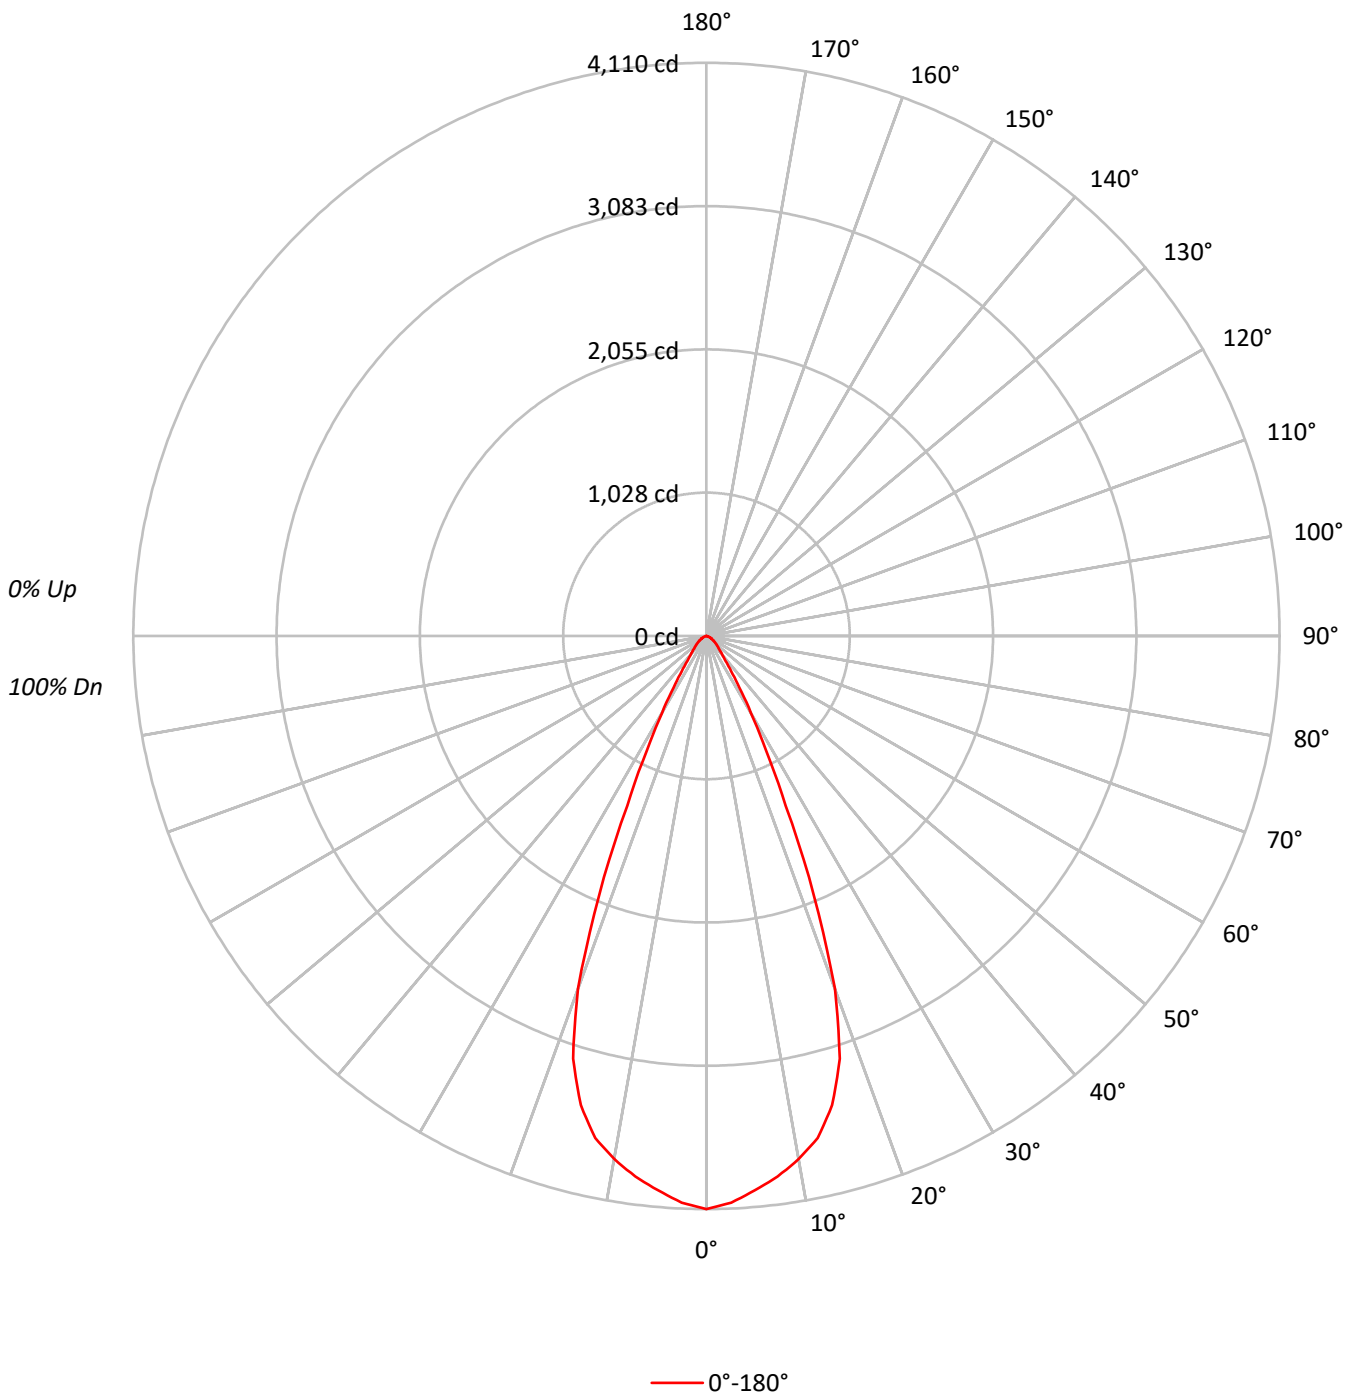



TEST NUMBER: P328478

CATALOG NUMBER: L815MED30FL927MB

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	114	111	109	107	111	109	107	105	105	103	102		101	100	99		98	97	96	94
2	109	104	100	97	107	102	99	96	99	96	94		96	94	92		94	92	90	89
3	104	98	93	90	102	97	92	89	94	90	87		92	89	86		89	87	85	83
4	99	92	87	83	97	91	86	83	89	85	82		87	84	81		85	82	80	79
5	95	87	82	78	93	86	81	78	85	80	77		83	79	76		82	78	76	74
6	91	83	77	73	89	82	77	73	81	76	73		79	75	72		78	74	72	70
7	87	79	73	69	86	78	73	69	77	72	69		76	72	69		75	71	68	67
8	84	75	70	66	82	74	69	66	73	69	66		72	68	65		72	68	65	64
9	80	72	66	63	79	71	66	63	70	66	62		69	65	62		69	65	62	61
10	77	69	63	60	76	68	63	60	67	63	60		67	62	59		66	62	59	58

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	506975
5°	494091
10°	476996
15°	444832
20°	353199
25°	183037
30°	90683
35°	45896
40°	28500
45°	21403
50°	17750
55°	14064
60°	11422
65°	9106
70°	6888
75°	3336
80°	710
85°	0



TEST NUMBER: P328478

CATALOG NUMBER: L815MED30FL927MB

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	375.5	15.7
10°-20°	948.3	39.7
20°-30°	659.1	27.6
30°-40°	210.5	8.8
40°-50°	97.7	4.1
50°-60°	59.8	2.5
60°-70°	31.4	1.3
70°-80°	8.4	0.4
80°-90°	0.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1982.9	82.9
0°-40°	2193.5	91.7
0°-60°	2351.0	98.3
0°-90°	2390.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2390.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	4110	
5°	3990	376
15°	3484	948
25°	1345	659
35°	305	211
45°	123	98
55°	65	60
65°	31	31
75°	7	8
85°	0	0
90°	0	



TEST NUMBER: P328478

CATALOG NUMBER: L815MED30FL927MB

CANDELA DISTRIBUTION (FULL):

	0°
0°	4110.2
2.5°	4066.9
5°	3990.5
7.5°	3910.0
10°	3808.4
12.5°	3687.7
15°	3483.5
17.5°	3179.7
20°	2690.8
22.5°	2013.9
25°	1344.9
27.5°	920.4
30°	636.7
32.5°	438.6
35°	304.8
37.5°	225.3
40°	177.0
42.5°	145.9
45°	122.7
47.5°	105.6
50°	92.5
52.5°	78.5
55°	65.4
57.5°	55.3
60°	46.3
62.5°	38.2
65°	31.2
67.5°	25.1
70°	19.1
72.5°	12.1
75°	7.0
77.5°	3.0
80°	1.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)